

Superlux[®]

FOR PROFESSIONALS
HD 662F
2X32 OHMS CCAW COIL

HD662 Series

Closed-back Professional Monitor Headphones

The HD662 series offer three distinctive sound profiles, each with its own character: The HD662 features a deep and rich bass, the HD662F has a true bass response, and the HD662B has a powerful bass punch. As for the sound image presented by these headphones, the HD662 gives you the feeling of actually being on stage with the artists while the HD662F makes you feel as if you sitting on the front row and the HD662B puts you in the middle of the concert hall. These three headphones also deliver clarity, accurate and well-balance sound. The ergonomically-designed vinyl ear pieces combined with light weight and self-adjusting headband of these headphones make them very comfortable. Whether you are monitoring, tracking, mixing or just listening to your mp3 music, you can expect comfort and sonic accuracy from HD662 series headphones.

HD662 Series

Closed-back Professional Monitor Headphones

Superlux®

HD662 series deliver clarity, accurate and well-balanced sound



HD662



○ HD662

Deep and rich bass response
"On stage" sound feel.



HD662F



◎ HD662F

True bass response
"Front row" sound image.




HD662B




○ HD662B

Powerful bass punch
"In hall" feel.


HD662 Series Frequency Response

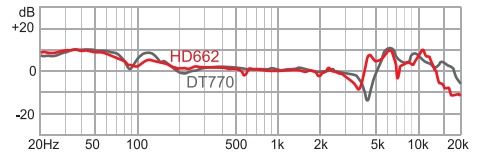

Both HD662 and DT770 have a similar curve. HD662 delivers deep bass, natural and well-balanced sound.

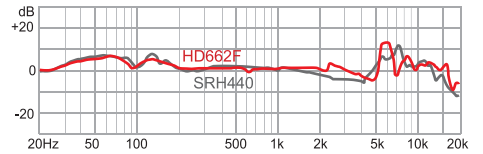

Both HD662F and SRH-440 have a similar curve. HD662F delivers true bass response, crystal clarity and precise sound characters.

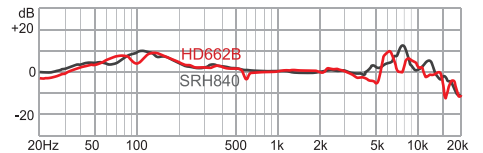

Both HD662B and SRH840 have a similar curve. HD662B delivers precisely tailored frequency response with powerful bass punch, clear mid-range and extended highs.

* FR charts shown above are test results determined by China Standard IEC318 ear simulation.

Features

Design for onstage or studio use

Closed-back, circumaural earphones

High noise attenuation

Self-adjusting headband for great fit and maximum comfort

Single-sided, straight cable

Outstanding quality and value

Environmentally friendly packaging, good for displays and easy to store

Specifications

Type
Dynamic, closed-back

Frequency Response
10 to 30,000Hz

Driver
Φ50mm, neodymium

Nominal Impedance
32Ω CCAW

Sound pressure level
98dB SPL (1mW) at 1KHz

Total Harmonic Distortion
≤0.3% at 1KHz /1V

Max. Input Power
HD662: 200mW
HD662F & HD662B: 300mW

Headphone Caliper Pressure
Approx. 5N

Cable
2.5M (8.2 ft) Straight

Connectors

Φ3.5mm (1/8")
Φ3.5mm (1/8") scw-on
gold-plated connections

Net Weight

286g (10.05oz)

Furnished Accessories



▪ 3.5/6.3mm gold coated
plug adapter
JA10063350900



▪ Carrying pouch
KW100068101SU

Replacement Parts



▪ Ear Pad Kit
Incl. a pair of ear pads
and a pair of foam disks
EPK602

www.superlux.com.tw