


# 760GA-P43 (FX) (MS-7699v.0A) ATX Mainboard

Support for AMD FX/ Phenom™ II/ Athlon™ II/ Sempron™ processors in an AM3+ socket

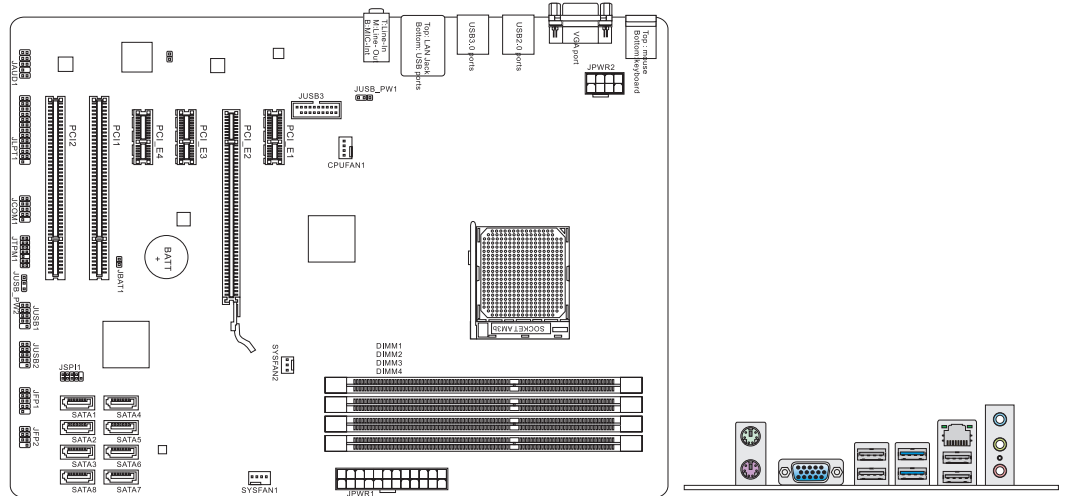

## Mainboard Specification

<p><b>Processor Support</b></p> <ul style="list-style-type: none"> <li>Support for AMD FX/ Phenom™ II/ Athlon™ II/ Sempron™ processors in an AM3+ socket</li> </ul> <p><b>HyperTransport</b></p> <ul style="list-style-type: none"> <li>Supports Hyper Transport (HT) 3.0 Technology</li> </ul> <p><b>Chipset</b></p> <ul style="list-style-type: none"> <li>North Bridge: AMD® 760G chipset</li> <li>South Bridge: AMD® SB710 chipset</li> </ul> <p><b>Memory Support</b></p> <ul style="list-style-type: none"> <li>4 DIMMs support for DDR3 1066/1333/1600/1866 SDRAM (32GB Max)</li> <li>Supports Dual-Channel mode</li> </ul> <p><b>LAN</b></p> <ul style="list-style-type: none"> <li>Supports GbLAN 10/100/1000 Fast Ethernet by Realtek® RTL8111E</li> </ul> <p><b>Audio</b></p> <ul style="list-style-type: none"> <li>Chip integrated by Realtek® ALC887</li> <li>Flexible 8-channel audio with jack sensing</li> <li>Compliant with Azalia 1.0 Spec</li> </ul> <p><b>SATA</b></p> <ul style="list-style-type: none"> <li>6 SATA 3Gb/s ports by AMD® SB710 (SATA1 ~6)</li> <li>2 SATA 6Gb/s ports by AMD® SB710 (SATA7 ~8)</li> </ul> <p><b>RAID</b></p> <ul style="list-style-type: none"> <li>Supports Raid 0/1/ 10/ JBOD mode</li> </ul>	<p><b>Connectors</b></p> <ul style="list-style-type: none"> <li><b>Back panel</b> <ul style="list-style-type: none"> <li>1 PS/2 keyboard port</li> <li>1 PS/2 mouse port</li> <li>1 VGA port</li> <li>4 USB 2.0 Ports</li> <li>2 USB 3.0 Ports</li> <li>1 LAN jack</li> <li>3 flexible audio jacks</li> </ul> </li> <li><b>On-Board Connectors</b> <ul style="list-style-type: none"> <li>2 USB 2.0 connectors</li> <li>1 USB 3.0 connector</li> <li>1 Front Panel Audio connector</li> <li>1 Serial connector</li> <li>1 TPM Module pinheader</li> <li>1 Parallel connector</li> </ul> </li> </ul> <p><b>Slots</b></p> <ul style="list-style-type: none"> <li>1 PCI Express x16 slot</li> <li>3 PCI Express x1 slots</li> <li>2 PCI slots</li> <li>Support 3.3V/ 5V PCI bus Interface</li> </ul> <p><b>Form Factor</b></p> <ul style="list-style-type: none"> <li>ATX (304.8mm X 222.5mm)</li> </ul> <p><b>Feature on Focus</b></p> <ul style="list-style-type: none"> <li>All Solid Cap Design</li> <li>Active Phase Switch feature to save power dynamically</li> <li>Heat sink design</li> <li>M-Flash included</li> <li>Unlock CPU Core</li> </ul> <p><b>Mounting</b></p> <ul style="list-style-type: none"> <li>6 mounting holes</li> </ul>
---	---

These specification is subject to change without prior notice.