


MSI

Making Dream Surfaces Attainable



Savoy
Porcelain Collection
www.msisurfaces.com

Colors

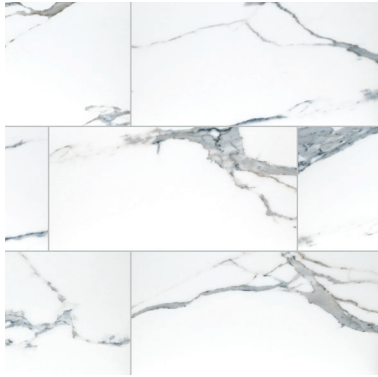

Savoy Azula 12"x24"



Savoy Crema 12"x24"

Size	Thickness	AZULA	CREMA
2x2 Matte	3/8"	NSAVAZU2X2	NSAVCRE2X2
1224	3/8"	NSAVAZU1224	NSAVCRE1224
1224P	3/8"	NSAVAZU1224P	NSAVCRE1224P
2448	3/8"	NSAVAZU2448	NSAVCRE2448
2448P	3/8"	NSAVAZU2448P	NSAVCRE2448P
3X24 Bullnose Matte	3/8"	NSAVAZU3X24BN-K	NSAVCRE3X24BN-K
3X24 Bullnose Polished	3/8"	NSAVAZU3X24BNP	NSAVCRE3X24BNP

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	●	III	V4	DCOF - < 0.42 Polished DCOF - > 0.42 Matte	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL	●	●	●						
HEAVY COMMERCIAL			●						

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

The Savoy Series is a rectified glazed porcelain. Digital print technology creates some of the same characteristics as some of the most sought-after natural stones, including marble. Because this material is a porcelain product, maintenance risks involved with actual stone are eliminated. There will be noticeable variations in color and movement between pieces. Therefore, it is important and recommended that a range of this product be viewed before finalizing a purchase.

Technical Information

Primary Colors: White-Cool, White-Warm

Material Type: Glazed Porcelain

Finish: Matte, Polished

Polished: Hardness / Mohs 5

Matte: Hardness / Mohs 7

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade.

Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.

Features At A Glance

- 2 different colors 12x24 and 24x48
- High quality Ink Jet technology

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Trim



3" x 24" Bullnose

