



# 2024 Wheels Product Catalog



Your only single source for industry-leading wheel end solutions.

STEEL & ALUMINUM WHEELS | DRUMS | HUBS | ROTORS | SLACK ADJUSTERS

# Your Only Single Source for Steel and Aluminum Wheels

## STEEL WHEEL COLOR OPTIONS

Premium Performance - Now Standard



## ACCURIDE GOES LIGHTER!

New 38 Pound Wheel



## STEEL ARMOR™

Superior Coating Technology



# PRO SHIELD XB

BLACK



## Table of Contents

	<b>General Information</b>
Page 4.....	Wheel Finish Options
Page 5.....	Active Part Number Index
Pages 6-7.....	Accuride Product Limited Warranty
<b>Section I</b>	<b>Hub-Piloted Tubeless Wheels</b>
Pages 9-10.....	Hub-Piloted — 10-Hole, 285.75mm Bolt Circle
Pages 11-12.....	Hub-Piloted — 8-Hole, 275mm Bolt Circle
Page 12.....	Hub-Piloted — 10-Hole, 11¼" Bolt Circle, Special Bus Application
Page 13.....	Hub-Piloted — 10-Hole, 335mm Bolt Circle
<b>Section II</b>	<b>Stud-Piloted Tubeless Wheels</b>
Page 15.....	Stud-Piloted — 10-Hole, 11¼" Bolt Circle
Page 16.....	Stud-Piloted — 10-Hole, 8¾" Bolt Circle
Page 16.....	Stud-Piloted — 6-Hole, 8¾" Bolt Circle
Page 16.....	Stud-Piloted — 6-Hole, 222.25mm Bolt Circle, Japanese
<b>Section III</b>	<b>Duplex® Disc Wheels</b>
Page 18.....	Duplex® Disc Wheels
<b>Section IV</b>	<b>Light Truck Wheels</b>
Pages 20-22.....	Light Truck Wheels
<b>Section V</b>	<b>General Information</b>
Page 24.....	Wheel Guard® Separator Plate
Page 24.....	Wheel Hub Covers
Page 25.....	Recommended Nut Torque Chart
Page 26.....	Aluminum Wheel Hand Hole Size by Part Number
Page 27.....	Accuride vs Alcoa/Arconic/Howmet Cross Reference
Page 28.....	Accuride vs Maxion Cross Reference
Page 29.....	Types of Accuride Rims, Rings, and Typical Disc-To-Rim Attachment Locations
Page 30.....	Accuride Typical Product Stamping
Pages 31-32.....	How to Identify Damaged Rims/Wheels
Pages 33-34.....	Changeover from Conventional to Wide Base Tubeless Tires
Page 35.....	Selected Duplex® Changeover Applications 385/65R22.5 and 425/65R22.5 Tire Size
Page 36.....	Selected Duplex® Changeover Applications to Aluminum and Drive/Trailer
Page 37.....	Dual Spacing of Wheels
Page 38.....	Changeover from Tube-Type Tires to Tubeless Tires
Page 39.....	Chart for Properly Matching Truck Tires to Rims/Wheels
Page 40.....	Offset vs. Inset/Outset
Pages 41-47.....	Obsolete Part Number Index
Page 48.....	Rim/Wheel Glossary
Page 49.....	Accuride Facilities and Production Locations

**WARNING:** Air pressure in an inflated truck tire mounted on a rim/wheel creates explosive energy; this pressure can cause the tire/rim assembly and/or components to burst apart with great force. If struck by an exploding tire or rim component, you can be seriously injured or killed. FEDERAL OSHA REGULATIONS REQUIRE ALL EMPLOYERS TO PROVIDE TRAINING FOR ALL EMPLOYEES WHO SERVICE SINGLE-PIECE AND MULTI-PIECE RIMS/WHEELS. THIS TRAINING SHOULD ENSURE THAT EACH EMPLOYEE DEMONSTRATES AND MAINTAINS HIS ABILITY TO SERVICE SINGLE AND MULTI-PIECE RIMS/WHEELS. THIS KIND OF SAFETY, SERVICE, AND MAINTENANCE INFORMATION IS CONTAINED IN THE ACCURIDE RIM/WHEEL SAFETY & SERVICE MANUAL, WHICH SHOULD BE RETAINED BY YOU. The Accuride Rim/Wheel Safety & Service Manual and other educational, informational, and training items are available free of charge at [www.AccurideCorp.com](http://www.AccurideCorp.com). Please reference page 38. You may also write to Literature Distribution, Accuride Corporation, 38777 Six Mile Road, Suite 410, Livonia, MI 48152 or call (800) 626-7096 to receive free copies. Outside the US call (812) 962-5000. You should not, nor should you let your employees, service rims/wheels unless they are thoroughly trained and completely understand this safety information.

## ALUMINUM WHEEL FINISH OPTIONS

Maximize your profit and savings by switching to the lightest aluminum wheel offering in the market. Accuride aluminum wheels allow you to increase payload, improve fuel economy, reduce tire wear, and achieve better heat dissipation, increasing your resale value. Accuride offers one of the widest selections of wheel finishes in the industry.

SP and XP aluminum wheel finishes offer superior shine and value, while ProShield Black and Accu-Armor™ offer a wide range of aluminum wheel finish options for every application.

### ALUMINUM FINISHES

Aluminum Finish Code	Aluminum Finish Name
SP	Standard Polish (Both Sides)
SPC	Standard Polish with Accu-Shield®
XP	Extra Polish (Both Sides)
XPC	Extra Polish with Accu-Shield®
XB	ProShield Black
R	Accu-Armor™ Wheel Surface Treatment

For example, 43644SP = Standard Polish. Contact your sales representative for more information on Accuride's aluminum finishes.

### Extra Polish with Accu-Shield® (XPC)

Don't mess with unnecessary refinishing costs, keep your wheels shining as if they were new with Accu-Shield®. This low maintenance, easy cleaning, clear coating will keep your wheels looking good.

### Accu-Armor™ Wheel Surface Treatment (R)

Texturized and anodized sparkle silver finish will outperform in any environment, and maintain its sharp appearance with low maintenance. Ideal for vocational applications.

## STEEL WHEEL FINISH OPTIONS

### Steel Armor™

Revolutionary coating technology, combating corrosion for extended wheel life. Steel Armor™ solves your wheel-corrosion headache. Think premium rust protection. More miles of service over the life of your wheels. A superior finish that looks great and lasts longer, reducing maintenance costs. Our proprietary powder coat process and technology makes all this possible. And it comes with a standard five year warranty! In addition to industry leading corrosion performance on select Steel Armor steel wheels, Accuride is able to offer standard size steel wheels in ANY color of your choice. Please contact your Accuride Sales Representative to ensure custom color matching and to confirm price and lead time.

### STEEL FINISHES

Steel Finish Code	Steel Finish Name
PKBLK21	Steel Armor™ powder coat black
PKWHT21	Steel Armor™ powder coat white
PKGRY21	Steel Armor™ powder coat gray

## ACTIVE PART NUMBER INDEX

Part Number	Size and Type	Page Number	Item Number	Part Number	Size and Type	Page Number	Item Number
590-1	Wheel-Guard	24	6	29838PK	18 x 8J	-	-
590-2	Wheel-Guard	24	5	29879	19.5 x 6.7=5 RW	22	1
590-3	Wheel-Guard	24	3	29883	19.5 x 6.00 RW	Use 29884	-
738-1	Wheel-Guard	24	4	29884	19.5 x 6.00RW	22	2
790-2 <sup>(1)</sup>	Wheel-Guard	24	1	29914	20 x 10.0-5°	-	-
27403	22.5 x 7.50	15	4	31450	24 x 8.5-5°	-	-
27404	22.5 x 8.25	15	5	40008 <sup>(2)</sup>	22.5 x 8.25	9	9
27406	24.5 x 8.25	15	7	40014 <sup>(2)</sup>	22.5 x 8.25	13	2
27599 <sup>(2)</sup>	24.5 x 8.25	15	3	40018 <sup>(2)</sup>	19.5 x 6.00RW	21	4
27833C	22.5 x 8.25	15	6	40160 <sup>(2)</sup>	19.5 x 7.50RW	11	3
27834C	22.5 x 8.25	12	3	40162 <sup>(2)</sup>	19.5 x 7.50RW	11	4
28112	17.5 x 6.75HC	16	1	40171 <sup>(2)</sup>	17.5 x 6.75	11	1
28145	17.5 x 6.75HC	16	2	40180 <sup>(2)</sup>	22.5 x 9.00	13	4
28440	22.5 x 8.25	13	5	40550	24.5 x 8.25	9	12
28476C	22.5 x 8.25	15	8	40620 <sup>(2)(3)</sup>	22.5 x 8.25	-	-
28510	22.5 x 9.00	15	9	40639 <sup>(2)(3)</sup>	22.5 x 9.00	-	-
28608 <sup>(2)</sup>	22.5 x 9.00	15	2	40680 <sup>(2)</sup>	22.5 x 8.25	9	3
28615 <sup>(2)</sup>	22.5 x 8.25	15	1	40682 <sup>(2)</sup>	22.5 x 14.00	18	6
28656	17.5 x 6.75HC	12	1	40699 <sup>(2)(3)</sup>	24.5 x 8.25	-	-
28827	24.5 x 8.25	10	13	41012 <sup>(2)</sup>	22.5 x 9.00	9	10
28828	22.5 x 8.25	10	9	41362 <sup>(2)</sup>	24.5 x 8.25	9	8
28844 <sup>(2)</sup>	22.5 x 7.50	9	4	41602 <sup>(2)</sup>	19.5 x 8.25RW	9	2
29001	22.5 x 7.50	10	2	41644 <sup>(2)</sup>	22.5 x 8.25	9	6
29015	19.5 x 6.00	20	3	41685 <sup>(2)</sup>	19.5 x 7.50RW	9	1
29039	22.5 x 9.00	10	11	41730 <sup>(2)</sup>	22.5 x 9.00	9	11
29057	22.5 x 13.00	18	13	42362 <sup>(2)</sup>	24.5 x 8.25	9	7
29058	22.5 x 13.00	18	14	43140 <sup>(2)</sup>	22.5 x 14.00	18	7
29169	22.5 x 8.25	10	10	43142 <sup>(2)</sup>	22.5 x 14.00	18	8
29195	19.5 x 7.50RW	10	1	43644 <sup>(2)</sup>	22.5 x 8.25	9	5
29300	22.5 x 9.00	10	12	50095 <sup>(4)</sup>	17 x 6.5	-	-
29303	22.5 x 13.00	18	12	50172	22.5 x 14.00	18	16
29348 <sup>(2)</sup>	22.5 x 8.25	11	5	50180	19.5 x 6.75RW	12	2
29361 <sup>(4)</sup>	16 x 6.5J	-	-	50198 <sup>(4)</sup>	17 x 6.5J	Use 50642	-
29374 <sup>(2)</sup>	22.5 x 12.25	18	3	50201	20 x 10.00	-	-
29376 <sup>(2)</sup>	22.5 x 13.00	18	5	50240 <sup>(4)</sup>	17 x 7.5J	-	-
29378 <sup>(2)</sup>	22.5 x 12.25	18	1	50271	17 x 6.5J	21	3
29380 <sup>(2)</sup>	22.5 x 13.00	18	4	50291 <sup>(5)</sup>	22.5 x 8.25	-	-
29388	19.5 x 6.00RW	16	3	50344 <sup>(5)</sup>	22.5 x 8.25	-	-
29506	19.5 x 6.00RW	16	4	50409	24.5 x 8.25	10	6
29545	24.5 x 8.25	10	8	50434	22.5 x 7.50	-	-
29560 <sup>(2)</sup>	22.5 x 8.25	13	1	50593	22.5 x 9.00	13	6
29562 <sup>(2)</sup>	22.5 x 9.00	13	3	50641	24.5 x 8.25	10	7
29579	16 x 6K	21	2	50642	17 x 6.5J	21	1
29584	19.5 x 6.00RW	22	3	51408	22.5 x 8.25	10	3
29587	16 x 6K	20	2	51487	22.5 x 8.25	10	4
29588	16 x 6.5J	20	4	51637	22.5 x 8.25	10	5
29627	22.5 x 14.00	18	15	100065	Wheel-Guard	24	2
29667	19.5 x 6.00	20	1	31868175	17.5 x 6.75HC	39	1
29683 <sup>(2)</sup>	22.5 x 12.25	18	2	FTB01	Wheel Hub Cover	24	9
29695 <sup>(2)</sup>	19.5 x 6.75RW	11	2	FTC01	Wheel Hub Cover	24	7
29729 <sup>(1)</sup>	20 x 10.00-5°	-	-	RRB01	Wheel Hub Cover	24	10
29737 <sup>(1)</sup>	20 x 10.00-5°	-	-	RRC01	Wheel Hub Cover	24	8
29741 <sup>(1)</sup>	20 x 10.00-5°	-	-				
29805	22.5 x 12.25	18	9				
29806	22.5 x 12.25	18	10				
29807	22.5 x 12.25	18	11				

<sup>(1)</sup> Call (800) 626-7096 for availability and minimum quantities.

<sup>(2)</sup> Aluminum Wheels.

<sup>(3)</sup> Available only through Freightliner Dealers.

<sup>(4)</sup> Available only through GM Dealers.

<sup>(5)</sup> Available only through PACCAR Dealers.

## ACCURIDE LIMITED WARRANTY TO FILE A WARRANTY CLAIM, CALL (800) 869-2275 ext 1

Accuride warrants to the original purchaser or the original end user that its products are free from defects in material and workmanship. The limited warranty time-frame (reference table below) is based on the date of product manufacture and shall be void if the product is altered, modified, misapplied, misused, neglected, repaired or not maintained in accordance with the instructions printed in the product-specific Accuride Safety & Service Manuals<sup>(2)</sup>.

### GENERAL PRODUCT OVERVIEW

Product Type	8 years/ 96 months	5 years/ 60 months	2 years/ 200,000 miles <sup>(1)</sup>	1 year/ 12 months
Accuride Aluminum Wheels <sup>(2)</sup>		Industry Standard Aluminum Wheels Duplex® Aluminum Wheels ACCU-SHIELD® Wheels ACCU-ARMOR™ Wheels ProShield Black Wheels		
Accuride Steel Wheels <sup>(2)</sup>		Extra Service Wheels™ (ESW) Styled Steel Wheels Tubeless Wheels and Demountable Rims Steel Armor™ <sup>(6)</sup>		ProFinish™ Corrosion Only <sup>(6)</sup> Duplex® Steel Disc Wheels Duplex® Demountable Rims Tube-Type Wheels & Demountable Rims Light Truck Wheels Steel Bolt-Together Specialty Wheel

Product Type	6 years/ 1,000,000 miles <sup>(1)</sup>	5 years/ 500,000 miles <sup>(1)</sup>	4 years/ 400,000 miles <sup>(1)</sup>	3 years/ 350,000 miles <sup>(1)</sup>	3 years/ 300,000 miles <sup>(1)</sup>	2 years/ 200,000 miles <sup>(1)</sup>	Limited Warranty <sup>(2)</sup>
Gunite Slack Adjusters <sup>(2)</sup>	Over-The-Road/Line Operated Trucks and Trailers <sup>(4)</sup>	Over-The Road/Line Operated Trucks and Trailers <sup>(3)</sup>	School Bus/City Delivery Vehicles <sup>(4)</sup>		School Bus/City Delivery Vehicles <sup>(3)</sup>  Severe Service: Garbage/Refuse Trucks, Fire Trucks, Logging, etc. <sup>(4)</sup>	Severe Service: Garbage/Refuse Trucks, Fire Trucks, Logging, etc. <sup>(3)</sup>	
Gunite Hubs <sup>(2)</sup>		TRU-SET® Trailer		TRU-SET® Front/Steer TRU-SET® Rear/Drive			Industry Standard Hubs
Gunite Brake Drums <sup>(2)</sup>							Industry Standard Brake Drums
Gunite Disc Brake Rotors <sup>(2)(5)</sup>							Industry Standard Disc Brake Rotors
Gunite Spoke Wheels <sup>(2)</sup>							Industry Standard Spoke Wheels

(1) Time or miles, whichever occurs first. Time is measured from date of manufacture.

(2) See Remedies and Limitations of Remedies and refer to appropriate Accuride guide for additional limited warranty condition details: Accuride Rim/Wheel Safety & Service Manual, Gunite Heavy-Duty Brake Drums, Gunite Automatic Slack Adjuster Service Manual, Gunite Disc Brake Rotors Maintenance Manual, and Gunite Disc Wheel Hubs, High-Performance Hubs, Spoke Wheels Maintenance & Installation Manual, and Steel Wheel Refinishing Criteria.

(3) Manufactured prior to April 6, 2015.

(4) Manufactured on or after April 6, 2015.

(5) Limited warranty for life of product.\*

\* "Life of product" means such period until the product has reached its maximum/minimum brake surface limitation. Product remains subject to the terms and conditions in this limited warranty, including the provisions on additional product warranty criteria and remedies and limitation of remedies.

(6) Designated steel wheels are covered by a limited warranty to be free of "rust damage" from the date of manufacture indicated on the wheel: ProFinish™ for twelve (12) months, Steel Armor™ for sixty (60) months. Rust damage is defined as rust sufficient to require refinishing as determined by Accuride in accordance with the most current version of Accuride's technical bulletin W2.043 Steel Wheel Refinishing Criteria. The Steel Armor™ warranties do not cover, and expressly exclude, rust in the crevice between the disc and the rim. The Steel Armor™ coating limited warranties herein apply to wheels manufactured by Accuride on or after January 1, 2017.

## **ACCURIDE LIMITED WARRANTY**

### **TO FILE A WARRANTY CLAIM, CALL (800) 869-2275 ext 1**

### **ADDITIONAL PRODUCT SPECIFIC LIMITED WARRANTY CRITERIA**

Wheels and Rims: The warranty shall be void if the product is used with improper tire sizes, inflation pressures, or exceeded load ratings. The warranty shall be void if the product is not properly maintained in accordance with the Accuride Rim/Wheel Safety & Service Manual. The warranty does not cover defects resulting from corrosion except as stated elsewhere in this document, other non-Accuride components, accident, excessive speed or other abnormal or severe operating conditions.

ACCU-ARMOR™, ACCU-SHIELD®, ACCU-FLANGE™, STEEL ARMOR™, PROFINISH™, PROSHIELD BLACK: Accuride does not cover the following conditions: (i) Any damage in the areas of the mounting surfaces, such as the area under the mounting nuts, the area in contact with hubs or drums and the area in contact with other wheels in dual position, (ii) Any damage due to cleaning, including damage from the use of abrasives, abrasive brushes, steel wool, scouring pads, strong chemicals or corrosion except as stated elsewhere in this document, and/or (iii) Any damage to the wheel finish due to wheel/tire assembly, removal, balancing weight, misuse, or chipping, whether by contact with road obstacles such as stones, gravel, curbs, barriers, signs, tire changing equipment or otherwise. ACCU-SHIELD®, PROSHIELD BLACK products are not covered for corrosion. ACCU-FLANGE® products, after washing, can have wheel polish or carnauba wax applied with a 100% cotton cloth. The STEEL ARMOR™ warranties are void with respect to, and expressly exclude, all wheels that have been refinished or refurbished and, for wheels used without an Accuride Wheel-Guard®, the disc face and any other areas impacted by this failure. The STEEL ARMOR™ and PROFINISH™ warranties expressly exclude and do not cover (a) paint appearance, paint integrity, or paint adhesion to the wheels due to chipping effect and (b) corrosion in the crevice between the wheel disc and rim. Accuride recommends cleaning wheels with mild soap and water.

Standard Brake Drums, Spoke Wheels, Disc Wheel Hubs, Automatic Slack Adjusters, and Hardware: The above warranty shall be void if (i) any goods have exceeded Accuride's acceptable wear limits or have been subjected to accidents or abnormal conditions of use, temperature, moisture, dirt or corrosive matter, or (ii) the product fails as the result of another manufacturer's product. The TRU-SET® disc wheel hub requires the use of a seller-approved hubcap and lubricant.

#### **REMEDIES AND LIMITATIONS OF REMEDIES**

In the event of any material breach of the above limited warranties, Accuride agrees to repair or replace,\* at its sole option, without charge any and all of its warrantable product that fail during normal use and service due to defects in material and/or workmanship, all subject to the original purchaser providing written notice of the alleged breach within 30 days of failure. Time is of the essence herein, and original purchaser's failure to provide written notice to Accuride within the required time of any alleged breach of the foregoing warranty will release and discharge Accuride from any obligation or liability for that breach of warranty. In no event will Accuride be liable for any other costs associated with the replacement or repair of product covered under this warranty, including labor, installation or other costs incurred by customer.

\* - NOTWITHSTANDING THE ABOVE, THE SOLE REMEDY UNDER THE STEEL ARMOR™ WARRANTIES SHALL BE THE PAYMENT OF US \$35 FOR STEEL ARMOR™ OR THE REPAIR OR REPLACEMENT OF THE WHEEL (AT ACCURIDE'S SOLE OPTION) IF A WARRANTABLE PRODUCT FAILS DURING NORMAL USE AND SERVICE DUE TO DEFECTS IN MATERIAL AND/OR WORKMANSHIP. Only one claim per wheel may be paid under the Steel Armor™ warranties. The remedy described in this paragraph is Accuride's sole and exclusive obligation under these warranties and in no event will Accuride be liable for special, incidental or consequential damages.

Customer must timely report the breach of warranty and demonstrate warrantability under the then applicable procedures during the warranty period. The remedies set forth herein shall be the sole and exclusive remedies available to the original purchaser so that Accuride repair, replacement, or payment as described above is a fulfillment of all Accuride obligations. Accuride SHALL NOT BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES OF ANY KIND. FURTHER, UNDER NO CIRCUMSTANCE SHALL ACCURIDE BE LIABLE FOR DAMAGES BEYOND THE PRICE OF THE GOODS PURCHASED BY THE ORIGINAL PURCHASER, WHETHER IN CONTRACT, IN TORT OR UNDER ANY WARRANTY OR OTHER USE.

Accuride reserves the right to require product return and/or washing (as previously noted) prior to warranty assessment as a condition of eligibility for warranty remedies. Product return expense must be paid by the product owner and if the product is found warrantable, reasonable freight expenses may be reimbursed by Accuride. No goods are to be returned to Accuride without a Returned Goods Authorization (RGA). If Accuride determines that any of the returned goods are non-warrantable, Accuride reserves the right to charge the original purchaser for the recovery of all transportation costs and expenses incurred in examining, processing and handling such goods. Any controversy or claim that customer may wish to bring that is arising out of or related to this limited warranty or breach hereof must be commenced in writing within 30 days of notification of warrantable status or shall be deemed to be waived.

Any product deemed non-warrantable is the property of the original purchaser and can be returned to the original purchaser upon its request and at its sole cost and expense. Should the non-warrantable item(s) not be reclaimed, Accuride will disposition the product no sooner than 30 days after original purchaser notification has been made.

For all warranty related questions, please contact your Accuride warranty administrator at (800) 869-2275 Option 1 or submit questions or claims to [warrantyadmin@accuridecorp.com](mailto:warrantyadmin@accuridecorp.com).

THE ABOVE WARRANTY IS THE SOLE AND EXCLUSIVE WARRANTY GIVEN BY ACCURIDE AND IS IN LIEU OF ALL OTHER WARRANTIES EXPRESSED, STATUTORY OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE EXPRESSLY DISCLAIMED BY ACCURIDE. IN NO EVENT SHALL THIS WARRANTY BE DEEMED TO COVER INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OF ANY KIND.

# HUB-PILOTED TUBELESS WHEELS

Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels

General Information






# ACCURIDE 15° TUBELESS ALUMINUM WHEELS



**Hub-Piloted Dual-Mounting  
Two-Piece Flange Nut**

**10-Hole, 285.75mm Bolt Circle, 220mm Bore**



Item	Wheel Size	Part Number	Wheel Offset	Disc	Installed Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
1	19.5 x 7.50RW <sup>(1)(2)</sup>	41685SP/XP	6.25"	.875"	DV545D	33	6700 - 131
2	19.5 x 8.25RW <sup>(1)(2)</sup>	41602SP/XP	6.63"	.875"	DV545D	35	7250 - 131
3	22 x 8.25 <sup>(4)</sup>	40680SP/XP	6.59"	.875"	DV545D	50	7400 - 131
4	22.5 x 7.50	28844SP/XP	6.45"	.935"	DV545D	55	7300 - 120
5	22.5 x 8.25	43644SP/XP	6.59"	.750"	DV545D	38	7400 - 131
6	22.5 x 8.25	41644XP	6.61"	.866"	TR554D	46	7400 - 131
7	24.5 x 8.25	42362SP/XP	6.59"	.800"	DV545D	50	7400 - 131
8	24.5 x 8.25	41362XP	6.61"	.866"	TR555D	56	7400 - 131
<b>Heavy Load Applications</b>							
9	22.5 x 8.25	40008SP/XP	6.59"	.935"	DV545D	54	8100 - 131
10	22.5 x 9.00	41012SP/XP	3.12" <sup>(3)</sup>	.980"	DV545E	51	10200 - 131
11	22.5 x 9.00	41730SP/XP	7.00"	.980"	DV545D	58	10000 - 130
12	24.5 x 8.25	40550SP/XP	6.59"	.950"	DV545D	60	8300 - 131

<sup>(1)</sup> "RW" denotes revised well for increased brake clearance.

<sup>(2)</sup> Requires special 15 x 8<sup>5</sup>/<sub>8</sub>" brake package.

<sup>(3)</sup> Not approved for dual application. (inset listed)

<sup>(4)</sup> Wheel has no handholes.

Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels


General Information

# ACCURIDE 15° TUBELESS STEEL WHEELS



**Hub-Piloted Dual-Mounting  
Two-Piece Flange Nut**

**10-Hole, 285.75mm Bolt Circle, 220mm Bore  
ACCUMOUNT EXTRA SERVICE WHEELS**



Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels

General Information

Item	Wheel Size	Part Number	Hand Holes	Wheel Offset	Disc	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
1	19.5 x 7.50RW <sup>(1)(2)</sup>	29195	5	6.40"	.437"	TR546-36	65	6700 - 120
2	22.5 x 7.50	29001	5	6.44"	.437"	TR572-19	72	6610 - 120
3	22.5 x 8.25	51408 <sup>(5)</sup>	2	6.60"	.437"	TR572-F19 <sup>(4)</sup>	67	7400 - 125
4	22.5 x 8.25	51487 <sup>(5)</sup>	5	6.60"	.437"	TR572-F19 <sup>(4)</sup>	65	7400 - 125
5	22.5 x 8.25	51637 <sup>(5)</sup>	10	6.60"	.437"	TR572-F19 <sup>(4)</sup>	65	7400 - 125
6	24.5 x 8.25	50409	2	6.60"	.437"	TR572-D19	78	7400 - 120
7	24.5 x 8.25	50641	5	6.60"	.437"	TR572-D19	76	7400 - 120
8	24.5 x 8.25	29545	10	6.62"	.437"	TR573	85	7400 - 120
<b>Heavy Load Applications</b>								
9	22.5 x 8.25	28828	2	6.62"	.472"	TR573	79	8000 - 130
10	22.5 x 8.25	29169	5	6.62"	.472"	TR573	78	8000 - 130
11	22.5 x 9.00	29039	5	5.25" <sup>(3)</sup>	.500"	TR573	103	10000 - 130
12	22.5 x 9.00	29300	5	7.00"	.625"	TR573	108	10000 - 130
13	24.5 x 8.25	28827	2	6.62"	.472"	TR573	86	8000 - 120


<sup>(1)</sup> "RW" denotes revised well for increased brake clearance.  
<sup>(2)</sup> Requires special 15 x 8<sup>5</sup>/<sub>16</sub>" brake package.  
<sup>(3)</sup> Not approved for dual application. (inset listed)  
<sup>(4)</sup> Valve TR572-E22 may provide improved valve access to inner dual.  
<sup>(5)</sup> Refer to bulletins W2.020, W2.021 and W2.022 for heavy duty application.

## ACCURIDE 15° TUBELESS ALUMINUM WHEELS



### Hub-Piloted Dual-Mounting Two-Piece Flange Nut

8-Hole, 275mm Bolt Circle, 221mm Bore



Item	Wheel Size	Part Number	Wheel Offset	Disc	Installed Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
1	17.5 x 6.75	40171SP/XP	5.55"	.827"	TR544C	30	5515 - 142
2	19.5 x 6.75RW <sup>(1)(2)</sup>	29695SP/XP	5.60"	.830"	DV545D	36	5000 - 125
3	19.5 x 7.50RW <sup>(1)(2)</sup>	40160SP/XP	6.25"	.875"	DV545D	39	6700 - 131
4	19.5 x 7.50RW <sup>(1)(2)(3)</sup>	40162SP/XP	6.25"	.875"	DV545D	39	6700 - 131
5	22.5 x 8.25	29348SP/XP	6.59"	.935"	DV545D	55	7300 - 120

<sup>(1)</sup>"RW" denotes revised well for increased brake clearance.

<sup>(2)</sup> Fits only ISO Hub back-up for 8-holes, 275mm system.


<sup>(3)</sup> Bolt holes are 32.87mm. ISO Standards are 26mm.

## ACCURIDE 15° TUBELESS STEEL WHEELS



### Hub-Piloted Dual-Mounting Two-Piece Flange Nut

**8-Hole, 275mm Bolt Circle, 221mm Bore**



Item	Wheel Size	Part Number	Hand Holes	Wheel Offset	Disc	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
1	17.5 x 6.75HC <sup>(1)</sup>	28656 <sup>(2)(5)</sup>	4	5.60"	.437"	TR500 <sup>(4)</sup>	54	5355 - 125
2	19.5 x 6.75RW <sup>(3)(7)</sup>	50180 <sup>(2)(6)</sup>	4	5.50"	.375"	TR575	59	5500 - 120

<sup>(1)</sup> "HC" denotes heavy construction to differentiate from light truck rims.

<sup>(2)</sup> Fits only ISO hub back-up diameter for 8-hole, 275mm system.

<sup>(3)</sup> "RW" denotes revised well for increased brake clearance.

<sup>(4)</sup> For inner duals use TR574 with F29 bend and a 2" extension.

<sup>(5)</sup> Bolt holes are 26mm. ISO Standards are 24mm.


<sup>(6)</sup> Bolt holes are 25mm. ISO Standards are 24mm.

<sup>(7)</sup> Requires special 15 x 8<sup>3</sup>/<sub>8</sub>" brake package.



### Hub-Piloted Dual-Mounting Two-Piece Flange Nut

**10-Hole, 11¼" Bolt Circle, 8.67" Bore  
Special Bus Application with 1.22" Bolt Holes  
EXTRA SERVICE WHEELS**



Item	Wheel Size	Part Number	Hand Holes	Wheel Offset	Disc	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
3	22.5 x 8.25	27834C <sup>(8)(9)</sup>	5	6.62"	.437"	TR572	76	7400 - 120

<sup>(8)</sup> Check clearance. May not fit some older bus applications.


<sup>(9)</sup> "C" suffix denotes balanced wheel.

## ACCURIDE 15° TUBELESS ALUMINUM WHEELS



**Hub-Piloted Dual-Mounting  
Two-Piece Flange Nut**

**10-Hole, 335mm Bolt Circle, 281mm Bore  
ULTRAMOUNT 335**



Item	Wheel Size	Part Number	Wheel Offset	Disc	Installed Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
1	22.5 x 8.25	29560SP/XP	6.69"	.866"	DV3.20.2	53	8046 - 138
2	22.5 x 8.25 <sup>(1)</sup>	40014SP/XP	6.69"	.866"	DV3.20.2	53	8046 - 138
3	22.5 x 9.00	29562SP/XP	6.89"	.866"	DV3.20.2	55	9094 - 141
4	22.5 x 9.00 <sup>(1)</sup>	40180SP/XP	6.89"	.866"	DV3.20.2	55	9094 - 141


<sup>(1)</sup> Bolt holes are 32mm. ISO standards are 26mm.

## ACCURIDE 15° TUBELESS STEEL WHEELS



**Hub-Piloted Dual-Mounting  
Two-Piece Flange Nut**

**10-Hole, 335mm Bolt Circle, 281mm Bore  
ULTRAMOUNT 335**



Item	Wheel Size	Part Number	Hand Holes	Wheel Offset	Disc	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
5	22.5 x 8.25	28440	10	6.62"	.433"	TR570-E14	87	7500 - 130
6	22.5 x 9.00	50593	10	7.00"	.625"	TR573-D23	111	10500 - 130

# STUD-PILOTED TUBELESS WHEELS


Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels

General Information

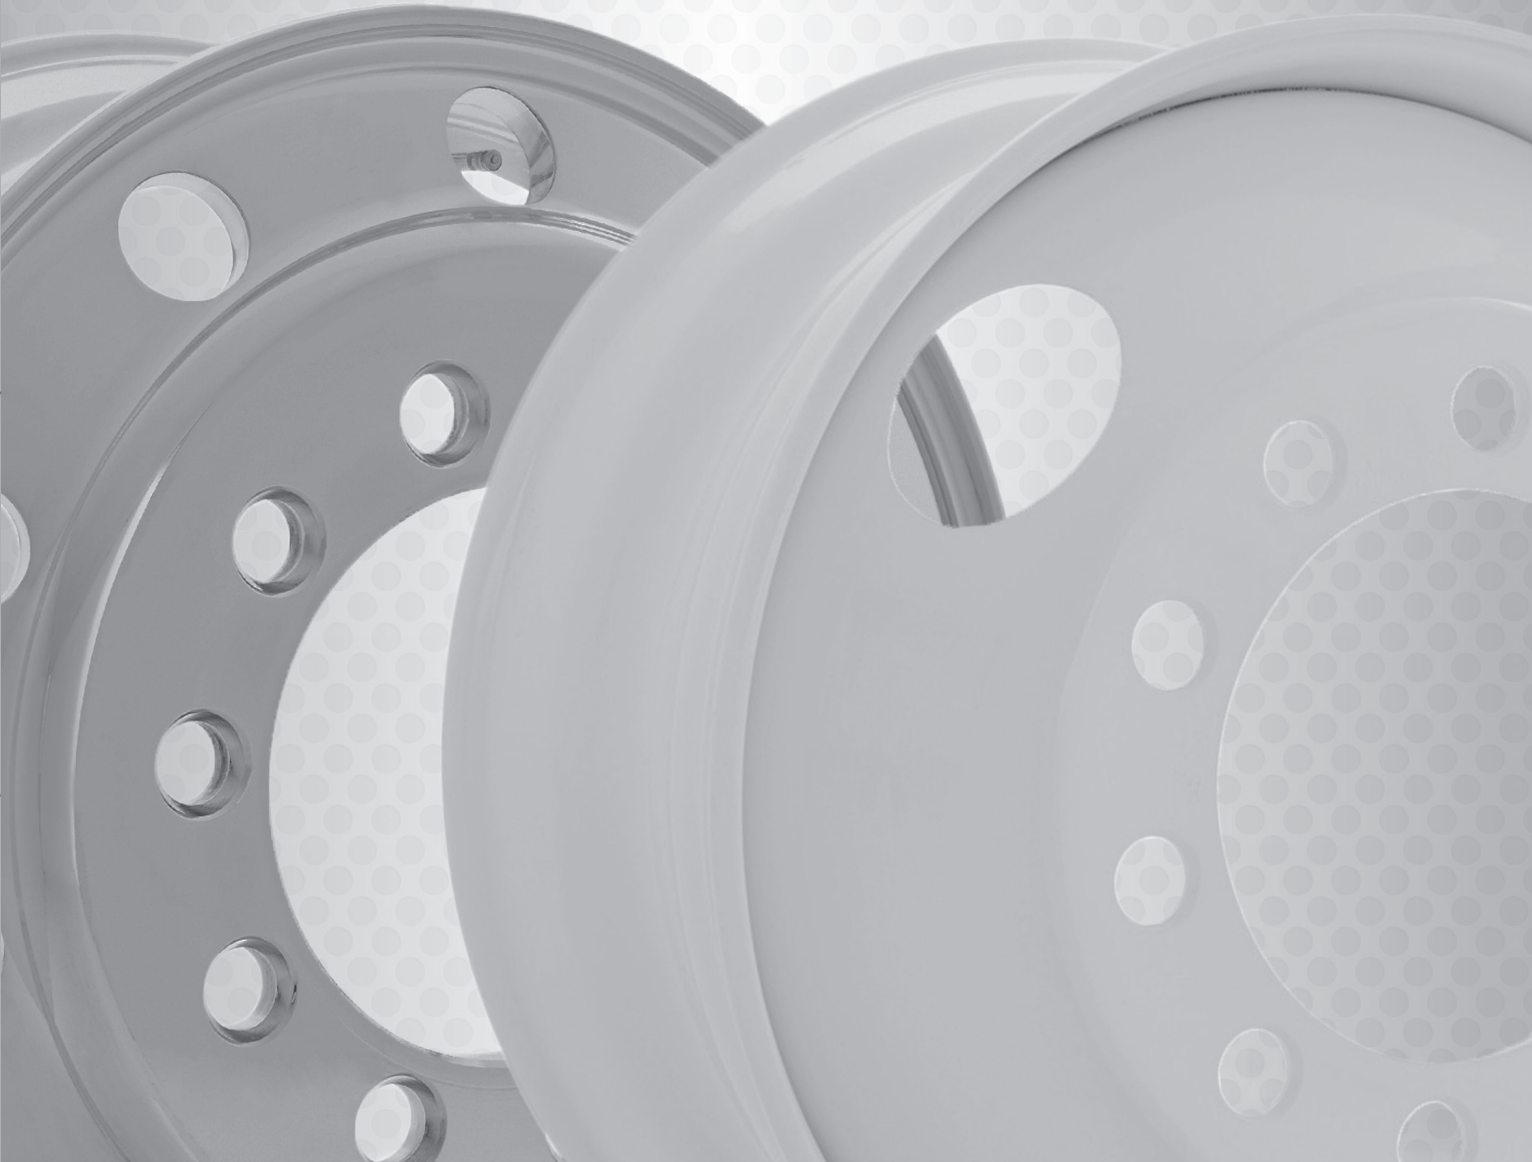


## ACCURIDE 15° TUBELESS ALUMINUM WHEELS




**Stud-Piloted Dual-Mounting  
Double Cap Nut**

**10-Hole, 11¼" Bolt Circle, 8.72" Bore**




Item	Wheel Size	Part Number	Wheel Offset	Disc	Installed Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
1	22.5 x 8.25	28615SP/XP	6.59"	.935"	DV545D	54	7250 - 120
2	22.5 x 9.00	28608SP/XP	7.00"	.980"	DV545D	60	9000 - 130
3	24.5 x 8.25	27599SP/XP	6.59"	.935"	DV545D	62	7200 - 120

## ACCURIDE 15° TUBELESS STEEL WHEELS



**Stud-Piloted Dual-Mounting  
Double Cap Nut**

**10-Hole, 11¼" Bolt Circle, 8.72" Bore  
EXTRA SERVICE WHEELS**



Item	Wheel Size	Part Number	Hand Holes	Wheel Offset	Disc	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
4	22.5 x 7.50	27403	2	6.44"	.437"	TR500	73	6610 - 120
5	22.5 x 8.25	27404	2	6.62"	.437"	TR572	78	7400 - 120
6	22.5 x 8.25	27833C <sup>(1)(2)</sup>	5	6.62"	.437"	TR572	75	7400 - 120
7	24.5 x 8.25	27406	2	6.62"	.437"	TR573	86	7400 - 120

### Heavy Load Applications


8	22.5 x 8.25	28476C <sup>(1)(2)</sup>	5	6.62"	.472"	TR573	77	8000 - 130
9	22.5 x 9.00	28510 <sup>(3)</sup>	2	7.00"	.625"	TR573	110	9000 - 130

<sup>(1)</sup> Check clearance. May not fit some older bus applications.

<sup>(2)</sup> "C" suffix denotes balanced wheel.


<sup>(3)</sup> Because of the thicker disc, longer studs must be used. When longer studs are used, wheels with thinner discs cannot be used in a dual assembly because the inner cap nut can bottom out before the wheel is securely clamped.

## ACCURIDE 15° TUBELESS STEEL WHEELS




### Stud-Piloted Dual-Mounting Double Cap Nut

10-Hole, 8 $\frac{3}{4}$ " Bolt Circle, 6.50" Bore




Item	Wheel Size	Part Number	Hand Holes	Wheel Offset	Disc	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
1	17.5 x 6.75HC <sup>(1)</sup>	28112	2	6.19"	.420"	TR570-14C	58	5070 - 125



### Stud-Piloted Dual-Mounting Double Cap Nut

6-Hole, 8 $\frac{3}{4}$ " Bolt Circle, 6.50" Bore



Item	Wheel Size	Part Number	Hand Holes	Wheel Offset	Disc	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
2	17.5 x 6.75HC <sup>(1)</sup>	28145	2	6.07"	.420"	TR500	58	5070 - 125
3	19.5 x 6.00RW <sup>(2)</sup>	29388	2	5.00"	.375"	TR435	52	3640 - 110

### Steel Stud-Piloted Mounting Double Cap Nut

6-Hole, 222.25 mm, Japanese

Item	Wheel Size	Part Number	Hand Holes	Wheel Offset	Disc	Recommended Valve <sup>(2)</sup>	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
4	19.5 x 6.00RW <sup>(2)</sup>	29506	6	127mm	9.53mm	V3-20-1	50.5	3640 - 110

<sup>(1)</sup> "HC" denotes heavy construction to differentiate from light truck rims.

<sup>(2)</sup> "RW" denotes revised well for increased brake clearance.



# DUPLEX<sup>®</sup> DISC WHEELS


Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex<sup>®</sup> Disc Wheels

Light Truck Wheels

General Information

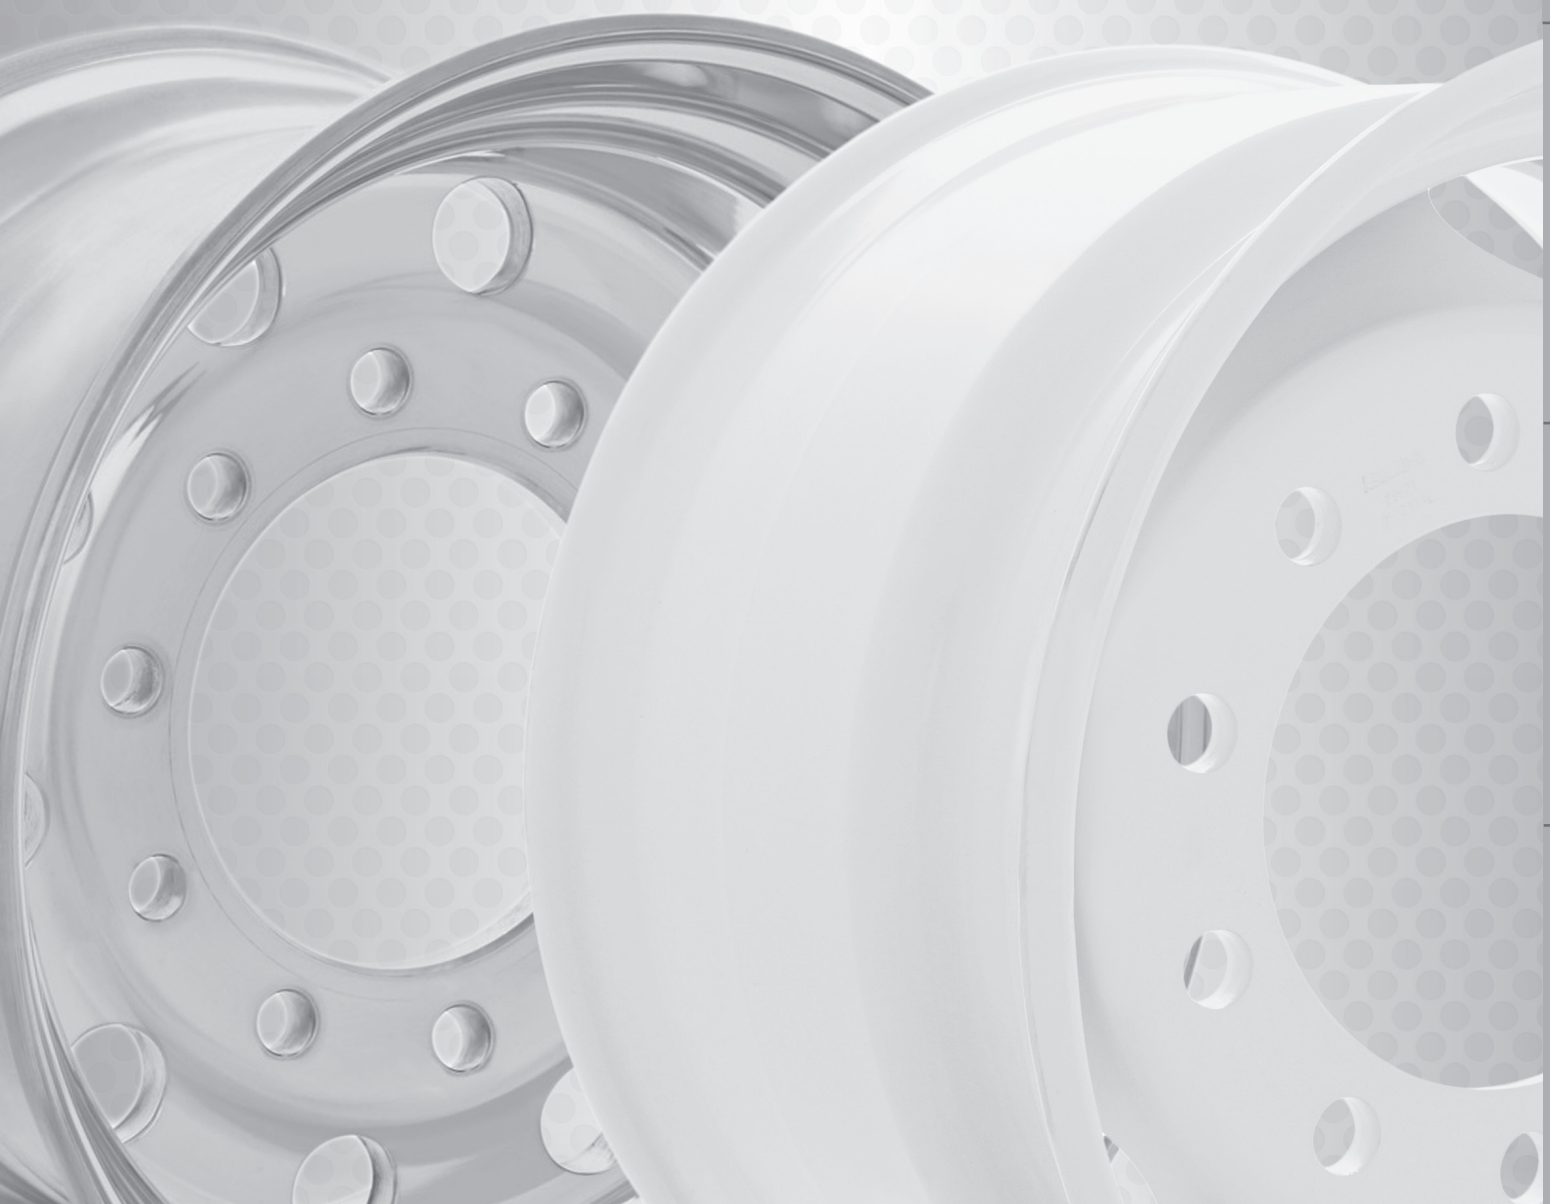


# ACCURIDE 15° TUBELESS DUPLEX® DISC WHEELS




## Aluminum Hub-Piloted Mounting<sup>(1)</sup> Two-Piece Flange Nut

10-Hole, 285.75mm Bolt Circle, 220mm Bore




Item	Wheel Size	Part Number	Inset <sup>(2)</sup>	Outset <sup>(2)</sup>	Disc Thickness	Installed Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
1	22.5 x 12.25	29378SP/XP	---	0.56"	1.120"	DV543E	62	11400 - 120
2	22.5 x 12.25	29683SP/XP	2.88"	4.00"	1.125"	DV545E	62	12300 - 125
3	22.5 x 12.25	29374SP/XP	4.75"	---	1.125"	DV545E	66	12300 - 131
4	22.5 x 13.00	29380SP/XP	---	0.56"	1.120"	DV543E	64	12300 - 120
5	22.5 x 13.00	29376SP/XP	5.25"	---	1.125"	DV545E	68	12800 - 120
6	22.5 x 14.00 <sup>(6)</sup>	40682SP/XP	0.50"	0.48"	0.98"	DV543E	56	12800 - 131
7	22.5 x 14.00	43140SP/XP	---	0.50"	0.98"	DV543E	51	12800 - 131
8	22.5 x 14.00	43142SP/XP	---	2.00" <sup>(4)</sup>	0.98"	DV543E	51	12800 - 131



## Steel Hub-Piloted Mounting<sup>(1)</sup> Two-Piece Flange Nut

10-Hole, 285.75mm Bolt Circle,  
220mm Bore, .625" Disc



Item	Wheel Size	Part Number	Inset <sup>(2)</sup>	Outset <sup>(2)</sup>	Hand Holes	Disc Position	Recommended Valve <sup>(5)</sup>	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
9	22.5 x 12.25	29805	---	0.63"	5	2	TR574-E24	119	11500 - 125
10	22.5 x 12.25	29806	4.00"	---	5	1	TR500	119	11500 - 125
11	22.5 x 12.25	29807	4.75"	---	5	1	TR574-E24	119	11500 - 125
12	22.5 x 13.00	29303	4.32"	---	5	1	TR574-26E	132	11000 - 110
13	22.5 x 13.00	29057	5.25"	---	5	1	TR574-E26	127	11000 - 110
14	22.5 x 13.00	29058 <sup>(6)</sup>	5.25"	---	0 <sup>(7)</sup>	1	TR574-E26	153	13000 - 130
15	22.5 x 14.00	29627	1.38"	2.00" <sup>(3)</sup>	5	2	TR573	127	12800 - 125
16	22.5 x 14.00	50172	---	0.00"	5	2	DV543E	127	12800 - 131

<sup>(1)</sup> These wheels require two-piece metric flange nuts and grade 8 or higher 22mm wheel studs and 450-500 ft. - lbs. nut torque are recommended.

<sup>(2)</sup> Inset is the lateral distance from the rim centerline to the mounting surface of the disc. Inset places the rim centerline inboard of the mounting surface; outset places the rim centerline outboard of the hub surface.

<sup>(3)</sup> The outset of Duplex® wheels can affect the loading on the axle end. When retrofitting trailers with wheels having an outset greater than 0.63 inches, consult the axle manufacturer.

<sup>(4)</sup> CAUTION: 2.00" outset wheels are not recommended for use with N-spindle applications.

<sup>(5)</sup> The valve shown is for the inset position.

<sup>(6)</sup> Rim flanges are reinforced.

<sup>(7)</sup> Wheel disc has small valve access hole.

<sup>(8)</sup> Wheel has no handholes.

# LIGHT TRUCK WHEELS


Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels

General Information

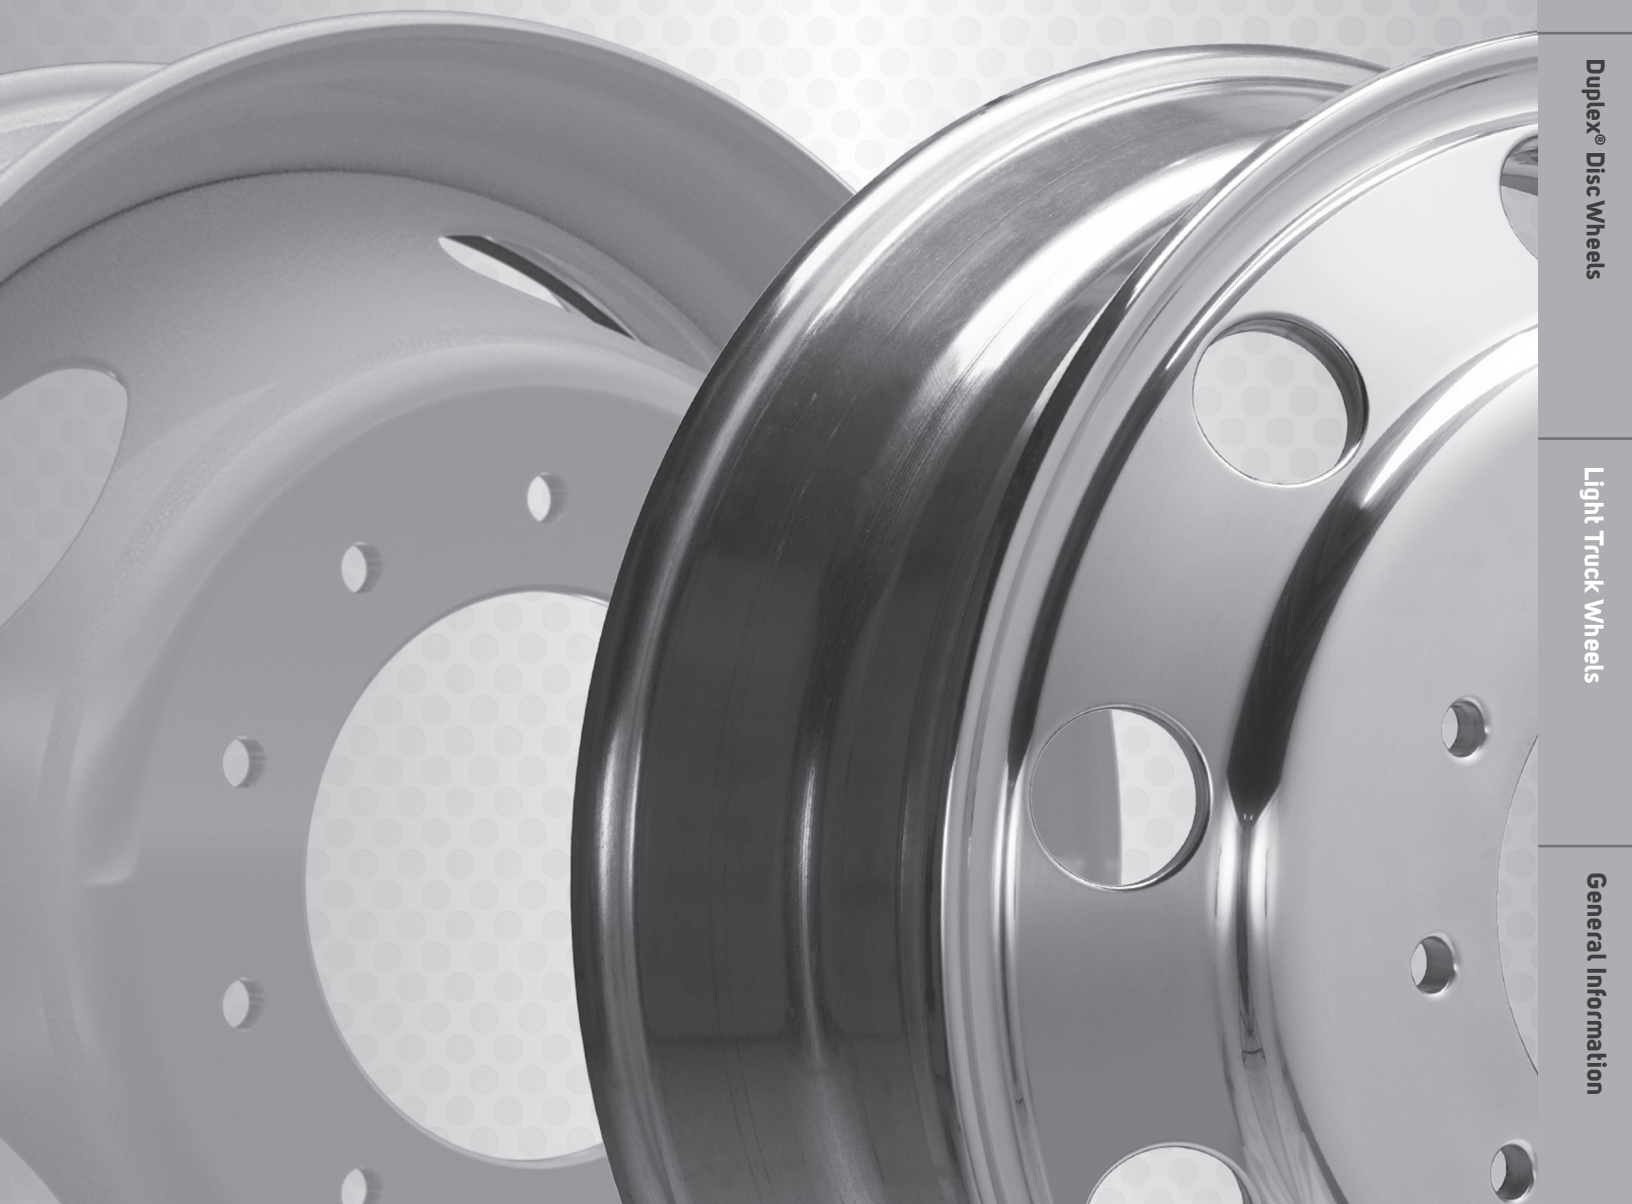


## LIGHT TRUCK WHEELS



### Hub-Piloted Dual-Mounting Use Clamping Plate w/90° Cone Nuts

10-Hole, 7¼" Bolt Circle, 5.25" Bore  
(P-300 Chevrolet or GMC Typical)




Item	Wheel Size	Rim Type	Part Number	Hand Holes	Wheel Offset	Disc	Valve Hole Dia.	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
1	19.5 x 6.00	15° Tbls	29667	5	5.08"	.375"	.625"	TR500	48	3000 - 95



### Hub-Piloted Dual-Mounting Use Clamping Plate w/90° Cone Nuts

8-Hole, 6½" Bolt Circle, 4.56" Bore  
(¾, 1 Ton, Chevrolet or GMC Typical)




Item	Wheel Size	Rim Type	Part Number	Hand Holes	Wheel Offset	Disc	Valve Hole Dia.	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
2	16 x 6K	5° DC	29587	4	5.00"	.308"	.453"	TR600HP	35	2440 - 80
3	19.5 x 6.00	15° Tbls	29015	4	5.00"	.296"	.625"	TR573	46	2540 - 80



### Hub-Piloted Dual-Mounting Use Only GM Swiveling Lug Nut<sup>(1)</sup>

8-Hole, 6½" Bolt Circle, 4.60" Bore  
(¾, 1 Ton, Chevrolet or GMC Typical)



Item	Wheel Size	Rim Type	Part Number	Hand Holes	Wheel Offset	Disc	Valve Hole Dia.	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
4	16 x 6.5J	5° DC	29588	4	5.04"	.308"	.453"	TR600HP	34	2440 - 80

#### CLAMPING PLATE TABLE

Wheel Size	Wheel P/N	Replaces P/N	Clamping Plate General Motors P/N
19.5 x 6.00	29015	27774	472536
19.5 x 6.00	29667	29207	349071


<sup>(1)</sup> The GM P/N for the M14-1.5 swiveling lug nut is 9591924. This type of nut is also called a two-piece flange nut or cone locking nut.

## LIGHT TRUCK WHEELS



### Hub-Piloted Dual-Mounting Use Only GM Swiveling Lug Nut<sup>(1)</sup>

8-Hole, 210mm Bolt Circle, 154.3mm Bore  
(3/4, 1 Ton, Chevrolet or GMC Typical)




Item	Wheel Size	Rim Type	Part Number	Hand Holes	Wheel Offset	Disc	Valve Hole Dia.	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
1	17 x 6.5J	5° DC	50642	5	5.39"	.330"	.453"	TR600	41	3000 - 80



### Hub-Piloted Dual-Mounting Use Only Ford Swiveling Lug Nut<sup>(2)</sup>

8-Hole, 6½" Bolt Circle, 4.88" Bore  
(Ford 3/4 and 1 Ton Typical)




Item	Wheel Size	Rim Type	Part Number	Hand Holes	Wheel Offset	Disc	Valve Hole Dia.	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
2	16 x 6K	5° DC	29579	8	5.15"	.308"	.453"	TR600HP	35	2500 - 80



### Hub-Piloted Dual-Mounting Use Only Ford Swiveling Lug Nut<sup>(2)</sup>

8-Hole, 165.10mm bolt circle, 120.0mm bore  
(Ford 3/4 and 1 Ton Typical)




Item	Wheel Size	Rim Type	Part Number	Hand Holes	Wheel Offset	Disc	Valve Hole Dia.	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
3	17 x 6.5J	5° DC	50271	8	5.20"	.300"	.453"	TR600HP	37	2500 - 80



### Aluminum Light Truck Wheel Hub-Piloted Dual Mounting Two-Piece Flange Nut

10-Hole, 225mm Bolt Circle, 170.10mm Bore



Item	Wheel Size	Part Number	Wheel Offset	Disc	Installed Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
4	19.5 x 6.00RW	40018SP/XP	5.35"	.598"	DV545D	32	4000 - 115

<sup>(1)</sup> The GM P/N for the M14-1.5 swiveling lug nut is 9591924. This type of nut is also called a two-piece flange nut or cone locking nut.


<sup>(2)</sup> The Ford P/N for the 9/16-18 swiveling lug nut is 391223. This type of nut is also called a two-piece flange nut or a cone locking nut.



## LIGHT TRUCK WHEELS

**Hub-Piloted Dual-Mounting  
Use Only Ford Swiveling Lug Nut<sup>(1)</sup>**

**10-Hole, 225mm Bolt Circle, 170.10mm Bore**




Item	Wheel Size	Rim Type	Part Number	Hand Holes	Wheel Offset	Disc	Valve Hole Dia.	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
1	19.5 x 6.75RW	15° Tbls	29879	5	5.50"	.368"	.625"	TR500	59	4000 - 115
2	19.5 x 6.00RW <sup>(2)</sup>	15° Tbls	29884	5	5.35"	.375"	.453"	TR416S	52	4000 - 115



**Hub-Piloted Dual-Mounting  
Use Only Ford Swiveling Lug Nut<sup>(1)</sup>**

**8-Hole, 225mm Bolt Circle, 170.10mm Bore  
(Ford F-Super Duty Typical)**



Item	Wheel Size	Rim Type	Part Number	Hand Holes	Wheel Offset	Disc	Valve Hole Dia.	Recommended Valve	Approx. Wt. (lbs)	Maximum Load & Infl. (lbs) - (psi)
3	19.5 x 6.00RW <sup>(2)</sup>	15° Tbls	29584	5	5.35"	.375"	.453"	VS 902 K	51	3750 - 115

<sup>(1)</sup> The Ford P/N for the M14 x 2.0 swiveling lug nut is N811599. This type of nut is also called a two-piece flange nut or a cone locking nut.

<sup>(2)</sup> "RW" denotes revised well for increased brake clearance.

# GENERAL INFORMATION

Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels

General Information



## WHEEL-GUARD® SEPARATOR PLATE



**590-1**



**590-3**

The Wheel-Guard® Separator Plate is approximately .035" thick. It is placed between the hub or drum and the wheel, and/or between two wheels in dual applications. Not to be installed between hub and brake drum. The Wheel-Guard® is recommended in severe applications where corrosion and/or wear have been identified. Both aluminum and steel wheels can benefit from use of the Wheel-Guard®. Care must be exercised in centering the separator plate prior to torquing, and stud length must be checked as each plate is approximately .035" thick.

Item	Part Number	Bolt Circle	Application
1	790-2	8 hole - 275mm	hub-piloted; 22mm diameter studs
2	100065	10 hole - 225mm	hub-piloted; 14mm diameter studs
3	590-3	10 hole - 285.75mm	hub-piloted; 22mm diameter studs
4	738-1	10 hole - 335mm	hub-piloted; ISO European Mount, 22mm diameter studs
5	590-2	10 hole - 11¼"	stud-piloted; ¾" diameter studs
6	590-1	10 hole - 11¼"	stud-piloted; 7/8" and 1½" diameter studs

## WHEEL HUB COVERS



Accuride's wheel covers are heat-resistant, durable and complement both steel and aluminum wheels. Available in a chrome or black finish, the thread-on application makes for easy installation on most 22.5" and 24.5" class 7 and 8 truck and trailer wheels.

Item	Part Number	Position	Finish
7	FTC01	Front	Chrome
8	RRC01	Rear	Chrome
9	FTB01	Front	Black
10	RRB01	Rear	Black




## RECOMMENDED NUT TORQUE

Mounting	Thread Size	Torque ft-lbs	Nut Type
<b>LIGHT TRUCK</b>			
10-Hole, 7.25" Hub-Piloted (Ford) (5.47" Bore)	9/16 - 18	125 - 165	Two piece flange
10-Hole, 7.25" Hub-Piloted (GM) (5.25" Bore) - With Clamping Plate	5/8 - 18	171 - 179	90° cone <sup>(1)</sup> With Clamping Plate
8-Hole, 6.50" I.O.C. (Ford)	9/16 - 18	175 - 200	90° cone
	5/8 - 18	175 - 200	90° cone
8-Hole, 210mm, Hub-Piloted (GM)	M14 x 1.5	136 - 144	Two piece flange
8-Hole, 6.50" Hub-Piloted (Ford) (4.88" Bore)	9/16 - 18	125 - 165	Two piece flange
	5/8 - 18	130 - 170	Two piece flange
8-Hole, 6.50" Stud-Piloted (Ford) (4.88" Bore) - Single Wheel	9/16 - 18	130 - 150	60° cone
8-Hole, 6.50" Hub-Piloted (GM)	M14 x 1.5	110 - 120	Two piece flange
8-Hole, 6.50" Hub-Piloted (GM) (4.56" Bore) - With Clamping Plate	9/16 - 18	136 - 144	90° cone <sup>(1)</sup>
	M14 x 1.5	136 - 144	With Clamping Plate
8-Hole, 6.50" Hub-Piloted (GM) (4.60" Bore)	M14 x 1.5	136 - 144	Two piece flange
8-Hole, 170mm, Hub-Piloted (Ford) (125.10mm Bore)	M14 x 2.0	150 - 160	Two piece flange
8-Hole, 225mm Hub-Piloted (Ford) (170.10mm Bore)	M14 x 2.0	150 - 160	Two piece flange
6-Hole, 8.75" Stud-Piloted	3/4 - 16	450 - 500	.875" spherical radius
	1 - 1/8 - 16	450 - 500	.875" spherical radius
6-Hole, 222.25mm Stud-Piloted Japanese .866" Nut Type	M20 x 1.5	325 - 400	.866" spherical radius
<b>MEDIUM/HEAVY TRUCK, TRAILER AND BUS</b>			
10-Hole, 13 3/16" HD Stud-Piloted	15/16 - 12	750 - 900	1.187" spherical radius
	1 - 5/16 - 12	750 - 900	1.187" spherical radius
10-Hole, 335mm Hub-Piloted	M22 x 1.5	450 - 500	Two piece flange
10-Hole, 11 1/4" Stud-Piloted	3/4 - 16	450 - 500	.875" spherical radius
	1 - 1/8 - 16	450 - 500	.875" spherical radius
10-Hole, 11 1/4" Hub-Piloted (Bus Mount)	3/4 - 16	300 - 350	Two piece flange
	7/8 - 14	350 - 400	Two piece flange
10-Hole, 285.75mm Hub-Piloted	M22 x 1.5	450 - 500	Two piece flange
10-Hole, 8.75" Hub-Piloted	11/16 - 16	300 - 400	One piece flange
10-Hole, 8.75" Stud-Piloted	3/4 - 16	450 - 500	.875" spherical radius
	1 - 1/8 - 16	450 - 500	.875" spherical radius
10-Hole, 200mm Hub-Piloted (Ford)	M14 x 2.0	150 - 160	Two piece flange
10-Hole, 225mm Hub-Piloted (Ford)	M14 x 2.0	150 - 160	Two piece flange
8-Hole, 285mm Stud-Piloted Japanese	Check truck manufacturer for torque details		
8-Hole, 275mm Hub-Piloted	M20 x 1.5	280 - 330	Two piece flange
	M22 x 1.5	450 - 500	Two piece flange
Demountable Rims	3/4 - 10	200 - 260	Flat nut

<sup>(1)</sup> These nuts can only be used with a clamping plate. Do not use 90° cone nuts against the disc face.


**Note:** Hub, stud and spoke wheel manufacturers may have different torque requirements. Consult Accuride Field Engineering at (800) 869-2275 if torque recommendations conflict. Refer to Accuride's Rim/Wheel Safety and Service Manual for information on torque and nut tightening sequence.

## ALUMINUM WHEEL HAND HOLE SIZE BY PART NUMBER




**1.5"**

29374 29376 29378  
 29378 29380 29683  
 40164 40171 40176  
 40386 40394 41012



**1.75"**

40166 40178

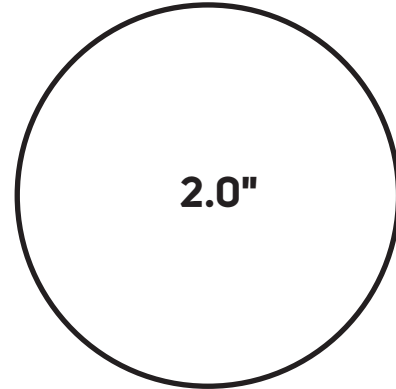


**2.0"**

27599 28608 28615 28844  
 29348 29695 40008 40018  
 42140 40160 40162 42142


Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

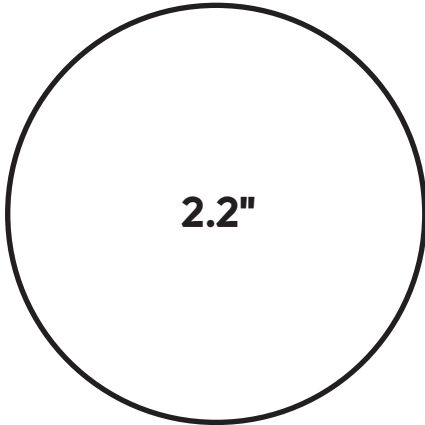


**2.2"**

29560 29562  
 40014 40180

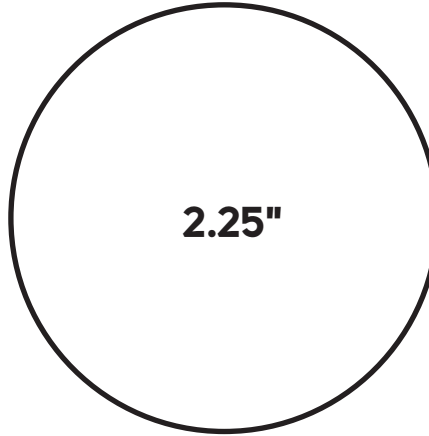

**2.25"**

41730 41602  
 42644 41685  
 43140 43142

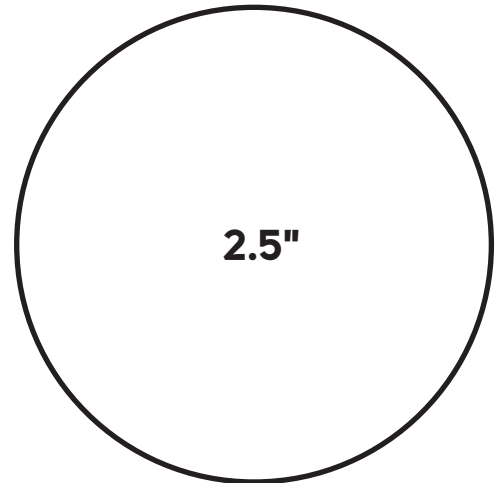


**2.5"**

43644


Duplex® Disc Wheels

Light Truck Wheels

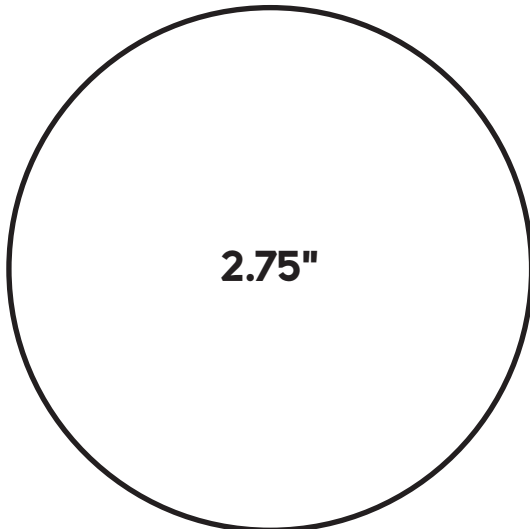

**2.75"**

41644 40550

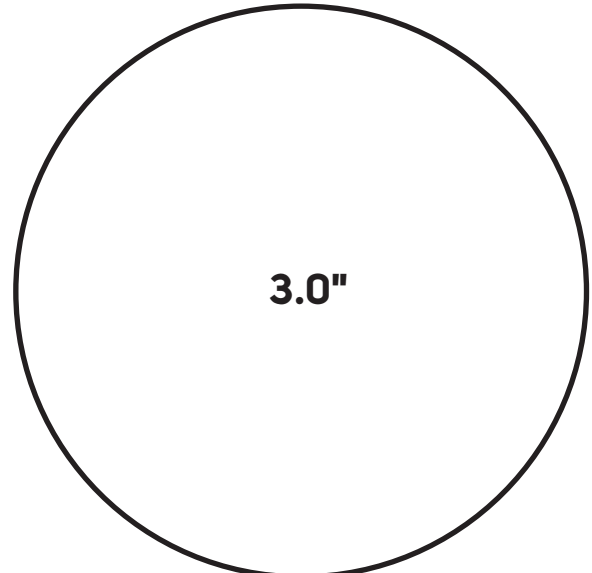

**3.0"**

42362

General Information

# ACCURIDE VS ALCOA/ARCONIC/HOWMET CROSS REFERENCE

**CROSS REFERENCE**

Alcoa P/N	Accuride P/N	Size	Mount	Bolt Hole	Bolt Circle	Bore
66348x	40171	17.5 x 6.75	Hub-Piloted; Dual Mounting	8	275mm	221mm
76329x	40018	19.5 x 6.00	Hub-Piloted; Dual Mounting	10	225mm	170mm
76542x	29695	19.5 x 6.75	Hub-Piloted; Dual Mounting	8	275mm	221mm
77362x	41685	19.5 x 7.50	Hub-Piloted; Dual Mounting	10	285.75mm	220mm
87360x	28844	22.5 x 7.50	Hub-Piloted; Dual Mounting	10	285.75mm	220mm
ULA18x / ULV39x	43644 <sup>(5)</sup>	22.5 x 8.25	Hub-Piloted; Dual Mounting	10	285.75mm	220mm
88565x	40008 <sup>(1)</sup>	22.5 x 8.25	Hub-Piloted; Dual Mounting	10	285.75mm	220mm
88651x	40014	22.5 x 8.25	Hub-Piloted; Dual Mounting	10	335mm	281mm
88652x	29560	22.5 x 8.25	Hub-Piloted; Dual Mounting	10	335mm	281mm
89U63x	41012 <sup>(1)(3)</sup>	22.5 x 9.00	Hub-Piloted; Dual Mounting	10	285.75mm	220mm
89U64x	41730 <sup>(1)</sup>	22.5 x 9.00	Hub-Piloted; Dual Mounting	10	285.75mm	220mm
89652x	29562 <sup>(1)</sup>	22.5 x 9.00	Hub-Piloted; Dual Mounting	10	335mm	281mm
89651x	40180	22.5 x 9.00	Hub-Piloted; Dual Mounting	10	335mm	281mm
82262x	29378	22.5 x 12.25	Hub-Piloted; Single Mounting	10	285.75mm	220mm
82362x	29683	22.5 x 12.25	Hub-Piloted; Single Mounting	10	285.75mm	220mm
82462x	29374	22.5 x 12.25	Hub-Piloted; Single Mounting	10	285.75mm	220mm
83462x	29376	22.5 x 13.00	Hub-Piloted; Single Mounting	10	285.75mm	220mm
84U64x	43142	22.5 x 14.00	Hub Piloted; Single Mounting	10	285.75mm	220mm
84U61x	43140 <sup>(2)</sup>	22.5 x 14.00	Hub-Piloted; Single Mounting	10	285.75mm	220mm
98U63x	42362	24.5 x 8.25	Hub-Piloted; Dual Mounting	10	285.75mm	220mm
98565x	40550	24.5 x 8.25	Hub-Piloted; Dual Mounting	10	285.75mm	220mm

The last number of the Alcoa part number represents the Alcoa finish.  
 0-SP; 1-XP; 2-XP; 3-XP; 7-SP; 8-SP Duplex inset position; 9-SP Duplex inset position; DB-C

- (1) Must confirm ADB clearance
- (2) 0.50" difference in outset
- (3) Not approved for dual applications – inset is 3.12"
- (4) Only available in limited sizes
- (5) Single valve hole design.

## Available Accuride Finishes

- SP Standard Polish
- XP Extra Polish
- XPC Extra Polish with Accu-Shield®
- XB ProShield Black<sup>(4)</sup>
- R Accu-Armor™ Finish

 Hub-Piloted  
Tubeless Wheels

 Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels

General Information

## ACCURIDE VS MAXION CROSS REFERENCE

CROSS REFERENCE						
Maxion P/N	Accuride P/N	Size		Mount	Offset	Hand Holes
10013	28656	17.5 x 6.75	Hub-Piloted	8 - 275mm BC - 221mm Bore	5.60"	4
10033	29816	22.5 x 12.25	Stud-Piloted	10 - 11¼" BC - 8.72" Bore	4.75" Inset	2
10034	29806	22.5 x 12.25	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	4.00" Inset	5
10035	29807	22.5 x 12.25	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	4.75" Inset	5
10038	29001	22.5 x 7.50	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	6.44"	5
10039	29146	22.5 x 13.00	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	0.63"	5
10041	29039	22.5 x 9.00	Hub-Piloted	10 - 285.75mm BC - 220mm Bore HD	5.25"	5
10042	29818	22.5 x 13.00	Stud-Piloted	10 - 11¼" BC - 8.72" Bore	0.63"	2
10043	29174	22.5 x 13.00	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	2.62" Inset	5
10044	28465	22.5 x 13.00	Stud-Piloted	10 - 13 3/16" BC - 10.69" Bore	6.12" Inset	0
10047	29300	22.5 x 9.00	Hub-Piloted	10 - 285.75mm BC - 220mm Bore HD	7.00"	5
10048	28510	22.5 x 9.00	Stud-Piloted	10 - 11¼" BC - 8.72" Bore HD	7.00"	2
10049	29169	22.5 x 8.25	Hub-Piloted	10 - 285.75mm BC - 220mm Bore HD	6.62"	5
10056	29057	22.5 x 13.00	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	5.25" Inset	5
10059	29303	22.5 x 13.00	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	4.32" Inset	5
10060	28684	22.5 x 13.00	Stud-Piloted	10 - 11¼" BC - 8.72" Bore	5.25" Inset	0
10073	51637	22.5 x 8.25	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	6.60"	10
10076	29545	24.5 x 8.25	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	6.62"	10
10086	50172	22.5 x 14.00	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	0.00"	5
10097	29627	22.5 x 14.00	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	2.00"	5
87893	27403	22.5 x 7.50	Stud-Piloted	10 - 11¼" BC - 8.72" Bore	6.44"	2
87897	27406	24.5 x 8.25	Stud-Piloted	10 - 11¼" BC - 8.72" Bore	6.62"	2
87904	27833C	22.5 x 8.25	Stud-Piloted	10 - 11¼" BC - 8.72" Bore	6.62"	5
87905	27404	22.5 x 8.25	Stud-Piloted	10 - 11¼" BC - 8.72" Bore	6.62"	2
87934	27834C	22.5 x 8.25	Hub-Piloted	Special Bus 10 - 11¼" BC - 8.66" Bore	6.62"	5
89921	28549	22.5 x 8.25	Stud-Piloted	10 - 11¼" BC - 8.72" Bore HD	6.62"	2
89922	28410	24.5 x 8.25	Stud-Piloted	10 - 11¼" BC - 8.72" Bore HD	6.62"	2
90260	28828	22.5 x 8.25	Hub-Piloted	10 - 285.75mm BC - 220mm Bore HD	6.62"	2
90261	28827	24.5 x 8.25	Hub-Piloted	10 - 285.75mm BC - 220mm Bore HD	6.62"	2
90262	51487	22.5 x 8.25	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	6.60"	5
90263	50641	24.5 x 8.25	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	6.62"	5
90541	51408	22.5 x 8.25	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	6.60"	2
90542	50409	24.5 x 8.25	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	6.62"	2
91831	50180	19.5 x 6.75	Hub-Piloted	8 - 275mm BC - 221mm Bore	5.60"	4
91834	28112	17.5 x 6.75	Stud-Piloted	10 - 8¾" BC - 6.50" Bore	6.19"	2
91840	29195	19.5 x 7.50	Hub-Piloted	10 - 285.75mm BC - 220mm Bore	6.40"	5
2920072	28440	22.5 x 8.25	Hub-Piloted	10 - 335mm BC - 281mm Bore	6.62"	10

Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels


Duplex® Disc Wheels

Light Truck Wheels

General Information


# TYPES OF ACCURIDE RIMS AND TYPICAL DISC-TO-RIM ATTACHMENT LOCATIONS

**15° TUBELESS ALUMINUM WHEELS**

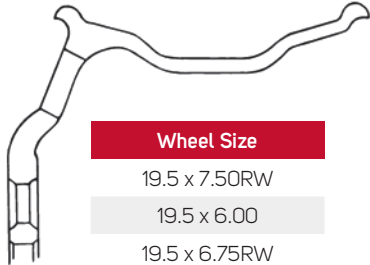


Wheel Size	
19.5 x 7.50RW	
19.5 x 6.00	
19.5 x 6.75RW	
19.5 x 8.25RW	
22.5 x 7.50	
22.5 x 8.25	
22.5 x 9.00	
24.5 x 8.25	

**15° TUBELESS STEEL WHEELS (Welded on Well)**

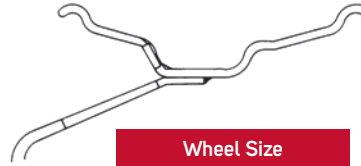


Wheel Size	
19.5 x 6.00	
19.5 x 6.00RW	
19.5 x 6.75RW	

**15° TUBELESS STEEL WHEELS (Welded on Ledge)**

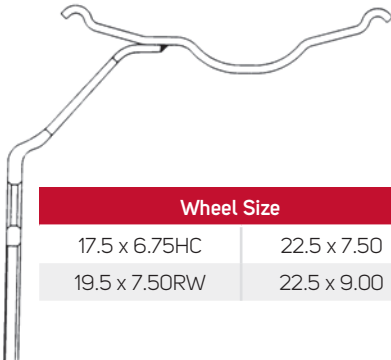


Wheel Size	
17.5 x 6.75HC	22.5 x 7.50
19.5 x 7.50RW	22.5 x 9.00

**5° DROP CENTER DUAL STEEL WHEEL**



Wheel Size	
16 x 6K	
16 x 6.5J	
16 x 7K	
17 x 6K	
17 x 7.5J	

**5° DROP CENTER SINGLE STEEL WHEEL**



Wheel Size	
16 x 6K	
16 x 7K	

Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels


Duplex® Disc Wheels

Light Truck Wheels

General Information

# ACCURIDE TYPICAL PRODUCT STAMPING

## STEEL WHEEL

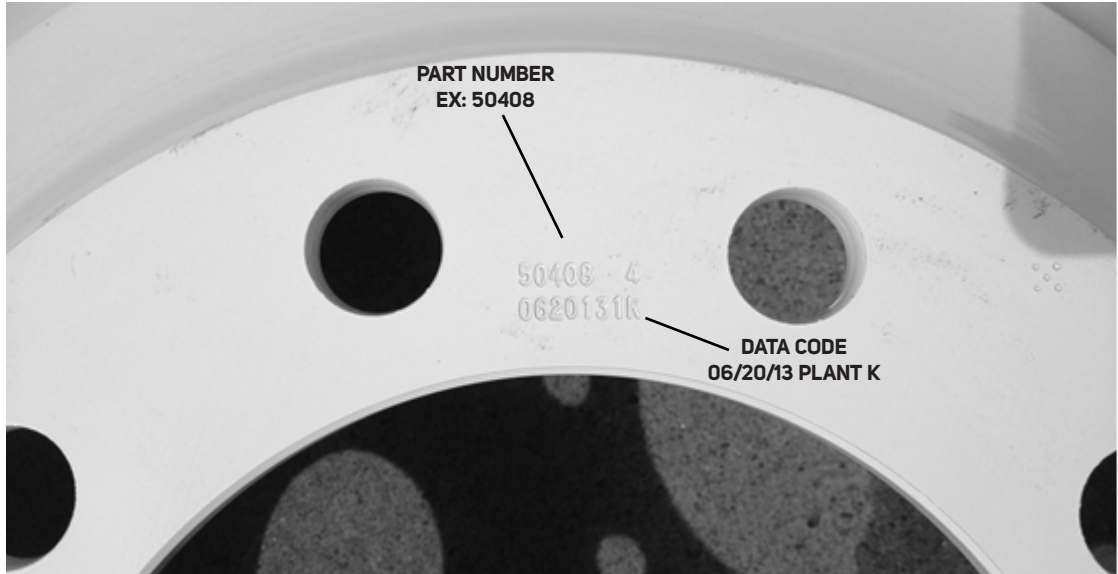

## ALUMINUM WHEEL



Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels


Light Truck Wheels

General Information


## HOW TO IDENTIFY DAMAGED RIMS/WHEELS

Rim/wheel components can become damaged. Check all metal surfaces for rust or corrosion buildup, cracks in metal, bent flanges and side rings, deep rim tool marks on rings or in gutter areas. Watch for the problems illustrated in the following two pages and take the corrective actions to prevent further problems. Remember, it is dangerous to assemble cracked, bent, severely corroded, or sprung rim/wheel components. Such items should be destroyed and discarded.


### RIM BASE CRACKS

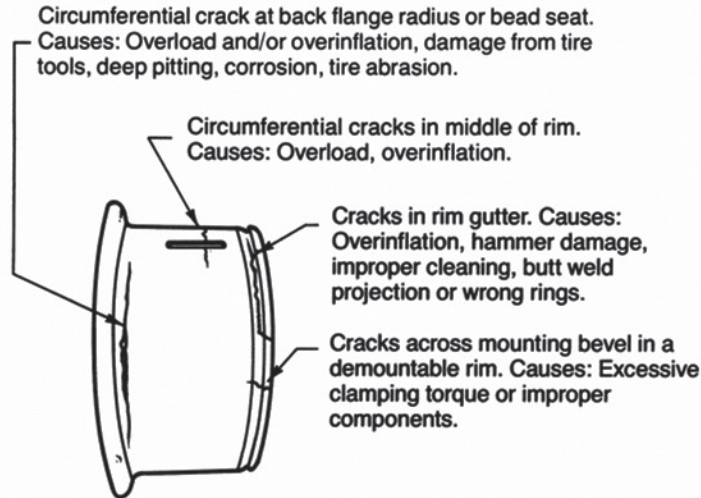

Flange or rim gutter chorded or bent. Causes: Excessive or improper torque, wrong hub or clamp, severe impact, run flat or hammering on rim gutter.



Mounting ring chorded or bent. Causes: Excessive or improper torque, wrong hub or clamp, severe impact.



Crack at valve locator. Cause: Overload.

Crack between valve locators. Cause: Overload.

Sheared or distorted valve locator. Causes: Insufficient torque, damaged stud thread, improper clamp wedge length or improper components.

Lateral crack at spoke or clamp fit. Causes: Excessive or improper torque, wrong hub or clamp.

# HOW TO IDENTIFY DAMAGED RIMS/WHEELS

Hub-Piloted  
Tubeless Wheels


## DISC WHEEL CRACKS/BOLT HOLE DISTORTION



Handhole to handhole.  
Handhole to bolt hole.  
Handhole to rim.  
Cause: Overloading.




Bolt hole to bolt hole.  
Causes: Loose cap nuts,  
small hub backup (also  
see bolt hole cracks/distortions).




Cracks at disc navel  
and/or handhole.  
Causes: Bad fit-up,  
damaged hub,  
overload or sharp  
edge at handhole.

Stud-Piloted  
Tubeless Wheels



Crack originating from thin  
edge of stud hole. Cause:  
Damaged or worn-out at  
chamfers.

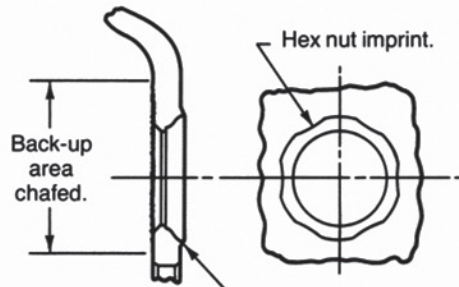


Chamfer enlarged or worn out  
by nut. Causes: Loose cap nuts or  
insufficient nut torque due to damaged  
threads, improper torquing or by worn-  
out nut.



Chamfer extruded on  
side opposite nut.  
Causes: Too much  
torque or improper nut.

Duplex® Disc Wheels


## TUBELESS RIM LEAKS



Circumferential cracks at bead seat. Causes:  
Moisture, pitting and erosion by the tire bead.

Circumferential cracks in well radius.  
Causes: Overload or overinflation.  
Corrosion due to water from the air  
lines, improper mounting lubricant,  
balance or sealer.

Circumferential cracks at attachment  
weld. Causes: Overload, overinflation  
or loose mounting on vehicle.  
**Note:** Wheel with well welded discs  
may not be approved for use with  
radial tires.



Leak at butt weld. Cause: Overload.

Leak at valve hole. Causes:  
Damage or severe  
corrosion.

Leak under tire bead, groove  
or ridge across bead seat.  
Causes: Corrosion, tire tool  
marks, bent flange or other  
damage.

Light Truck Wheels

General Information



# CHANGEOVER FROM CONVENTIONAL TO WIDE BASE TUBELESS TIRES

## FRONT APPLICATIONS

Required Information for Duplex® Changeover Calculations			
Determine the following information and insert into the calculation below			
<i>OBTAIN THIS INFORMATION FROM THE TRUCK and THE CHOICE FOR THE NEW WIDE BASE TIRE</i>		<i>OBTAIN THIS INFORMATION FROM THE ACCURIDE CATALOG AND/OR TIRE DATA BOOK</i>	
Existing Wheel/Rim Part Number	<input type="text"/>	Existing Wheel Inset or Rim Offset <sup>(1)</sup>	<input type="text"/>
Existing Tire Size	<input type="text"/>	Existing Tire Section Width <sup>(2)</sup>	<input type="text"/>
Proposed Wide Base Tire Size	<input type="text"/>	Proposed Wide Base Tire Section Width <sup>(3)</sup>	<input type="text"/>
Existing Overall Width (See Figure 1 - page 35)	<input type="text"/>		

<sup>(1)</sup> Determine the existing wheel inset or rim offset from the part number and the catalog information. Inset is offset minus disc thickness

<sup>(2)</sup> Determine the existing tire section width from the chart on page 39.

<sup>(3)</sup> Determine the proposed wheel/rim width and wide base tire section width from the chart on page 34.

The new Duplex® wheel inset or rim offset is determined by inserting the above information into the following calculation.

### Wide Base Changeover Calculation

$$\begin{array}{ccccccc}
 \text{Existing} & & \text{Existing} & & & & \text{NEW DUPLEX} \\
 \text{Wheel Inset} & + & \text{Tire Section} & = & \text{Proposed} & - & \text{WHEEL INSET OR} \\
 \text{or Rim Offset} & & \div 2 & & \text{Wide Base Tire} & \div 2 & \text{RIM OFFSET} \\
 & & \text{Width} & & \text{Section Width} & & \\
 \hline
 \boxed{\phantom{000}} & + & \boxed{\phantom{000}} & = & \boxed{\phantom{000}} & - & \boxed{\phantom{000}} = \boxed{\phantom{000}}
 \end{array}$$

Refer to the Duplex® part number listings on page 18 and choose the next smaller available wheel inset or rim offset for this application. This choice will maintain the existing inside clearance between the tire or wheel/rim and the frame/suspension. If adequate inside clearance exists, the next larger wheel inset or rim offset may be chosen.

The change in the overall width of the vehicle should be determined to verify that the new width is not over the maximum allowed by law. Use the following calculation to determine the new overall width. This new width should be checked against federal, state, and local regulations to assure compliance with maximum width restrictions.

$$\begin{array}{ccccccc}
 \text{Existing} & & \text{Existing} & & \text{Existing} & & \text{New Duplex} \\
 \text{Overall Width} & +2x & \text{Wheel Inset} & - & \text{Tire Section} & -2x & \text{Wheel Inset} \\
 & & \text{or Rim Offset} & & \text{Width} & & \text{or Rim Offset} \\
 & & & & & & + \\
 & & & & & & \text{Wide Base} \\
 & & & & & & \text{Tire Section} \\
 & & & & & & \text{Width} \\
 & & & & & & = \\
 & & & & & & \text{NEW} \\
 & & & & & & \text{OVERALL} \\
 & & & & & & \text{WIDTH} \\
 \hline
 \boxed{\phantom{000}} & +2x & \boxed{\phantom{000}} & - & \boxed{\phantom{000}} & -2x & \boxed{\phantom{000}} + \boxed{\phantom{000}} = \boxed{\phantom{000}}
 \end{array}$$

It is recommended that the wheel/rim be mounted on the truck without the tire to verify clearances prior to tire mounting. Products which have had a tire mounted may not be returned.

Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels

General Information

# CHANGEOVER FROM CONVENTIONAL TO WIDE BASE TUBELESS TIRES

## FRONT APPLICATIONS CONTINUED

### Wide Base Tire Section Width and Dimension Chart

Information from The 2022 Tire & Rim Association Yearbook

Tire Size	Rim Width	Tire Section Width
15R22.5	11.75	15.30
	12.25	15.50 <sup>(1)</sup>
445/50R22.5	14.00	17.52
445/55R 22.5	14.00	17.80
385/65R22.5	11.75	15.31
	12.25	15.51 <sup>(1)</sup>
16.5R22.5	13.00	16.75
	12.25	16.45 <sup>(1)</sup>
425/65R22.5	12.25	16.61
	13.00	16.91 <sup>(1)</sup>
	14.00	17.31 <sup>(1)</sup>
445/65R22.5	13.00	17.48
	14.00	17.88 <sup>(1)</sup>
18R22.5	13.00	17.60 <sup>(1)</sup>
	14.00	18.00

<sup>(1)</sup> This value was calculated by the following formula: Tire section width will change 0.1" each 1/4" change in rim width from the design rim width.

## SELECTED DUPLEX® CHANGEOVER APPLICATIONS 385/65R22.5 TIRE SIZE

### Factors which may effect fitment:


- Drum clearance on older applications
- Inside clearance
- Maximum outside track (overall width) (max is usually 102")

### Use the following recommendations:

- Inside clearance will be preserved and the outside track will increase by 9"
- **For Hub-Piloted steel wheel applications:**
  - 12.25 width - 29806

### Alternative Recommendation

- The new overall width will be increased 7½" and the inside clearance will be reduced by ¾"
- **For Hub-Piloted steel wheel applications:**
  - 12.25 width - 29807

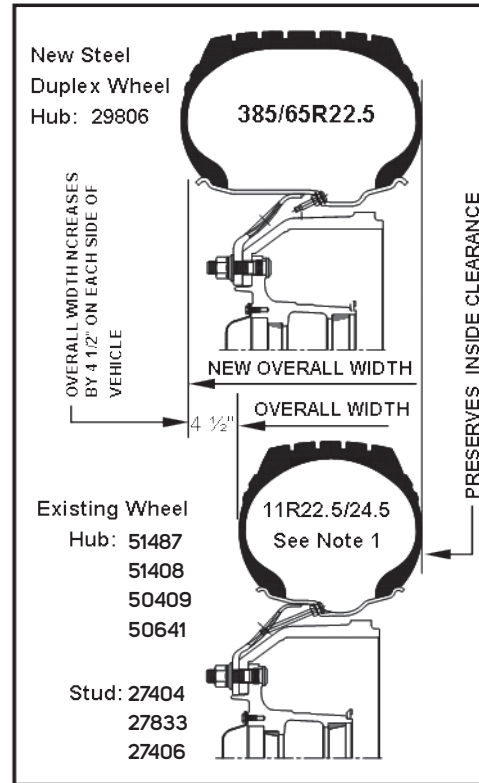

## SELECTED DUPLEX® CHANGEOVER APPLICATIONS 425/65R22.5 TIRE SIZE

### Factors which may effect fitment:


- Drum clearance on older applications
- Inside clearance
- Maximum outside track (overall width) (max is usually 102")

### Use the following recommendations:

- Note that the inside clearance will be reduced by ¾" and the outside track will increase by 10"
- **For Hub-Piloted steel wheel applications:**
  - 12.25 width - 29806

### Alternative Recommendation

- The new overall width will be increased 8½" and the inside clearance will now be reduced by 1½".
- **For Hub-Piloted steel wheel applications:**
  - 12.25 width - 29807

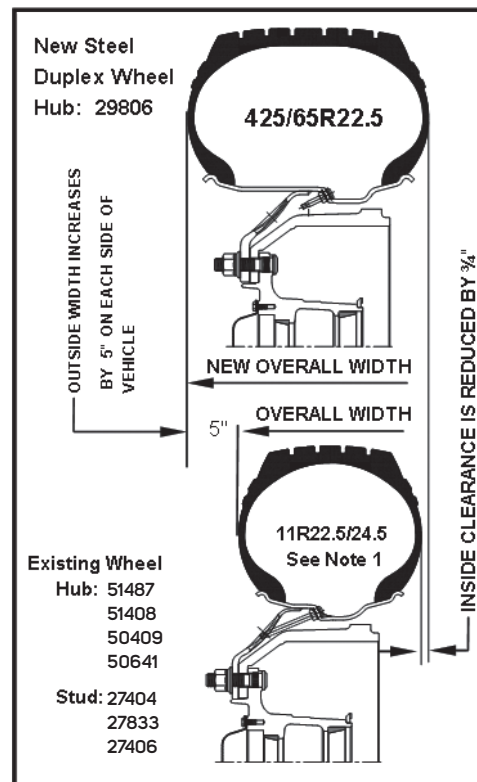

Note 1: Changeover also applies to 275/80 and 295/75 low profile tires.

## SELECTED DUPLEX® CHANGEOVER APPLICATIONS TO ALUMINUM

### Factors which may effect fitment:


- Drum clearance
- Inside clearance
- Maximum outside track (width) (max is usually 102")

### Use the following recommendations:

- Hub-Piloted applications only
  - 29374
- New overall width is increased as follows:
  - 385/65R22.5 tire - 3¾" each side of the vehicle
  - 425/65R22.5 tire - 4¼" each side of the vehicle
- Reduces the inside clearance as follows:
  - 385/65R22.5 tire - approx 1"
  - 425/65R22.5 tire - approx 1½"

### Alternative recommendation:

- Hub-Piloted applications only
  - 29683
- Overall width increases an additional 2" each side from the dimensions shown above and in the sketch.
- Inside clearance is not changed from original.

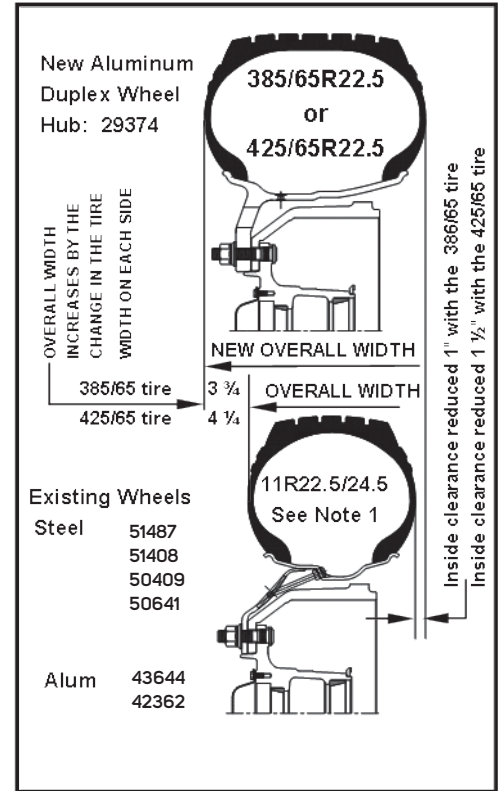

## SELECTED DUPLEX® CHANGEOVER APPLICATIONS – DRIVE/TRAILER

### Factors which may effect fitment:


- Drum clearance on older applications
- Centerline alignment is recommended for best distribution of bearing loads. If outside alignment changeovers are preferred, bearing loads should be verified with axle manufacturer.

### 385/65R22.5 and 425/65R22.5 Recommendations:

- **Hub-Piloted applications:**
  - 12.25 width - Steel 29805; Aluminum 29378 (385 and 425 Tires)
  - 13.00 width - Aluminum 29380 (425 Tire Only)

### 445/50R22.5

- **Tractor Applications**
  - Hub-Piloted applications:
    - 14.00 width - Steel 29627; Aluminum 43142
- **Trailer Applications**
  - Hub-Piloted applications:
    - 14.00 width - Steel 50172; Aluminum 43140

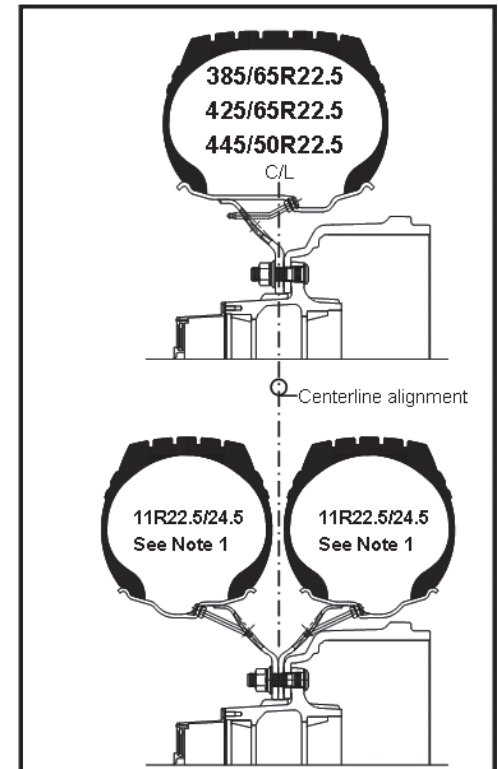

Note 1: Changeover also applies to 275/80 and 295/75 low profile tires.

## DUAL SPACING OF WHEELS


As shown in the diagram below, the sum of the wheel offsets of the two wheels used equals the dual spacing. The recommended minimum dual spacing for tire clearance is shown in the chart to the right.

Tire clearance can be calculated by subtracting one tire section width from the sum of the two wheel offsets. This information is found in tire data books (also see chart). For more accuracy, the grown tire width at the rated load can be used instead of the new tire section width. This dimension can be obtained either by actual measurement of the tire width (including protective side ribs) or by referring to the tire manufacturer's data book.

In addition to determining tire clearance, the wheel offset directly affects two other important dimensions: (1) the vehicle clearance and (2) the overall vehicle width of tires (see diagram below).

Vehicle body clearance, which is the distance from the inside tire to the spring or other body structures, will change proportionally to any change in offset of the inside wheel.

The overall vehicle width of tires is the distance from the outside tire wall of one tire to the outside tire wall of the tire on the opposite end of the axle. This dimension will be altered correspondingly by an increase or decrease in wheel offset. Overall vehicle width will change proportionally to any offset changes of the wheel, if the tire projects beyond the body structure. The maximum vehicle width is regulated by law.

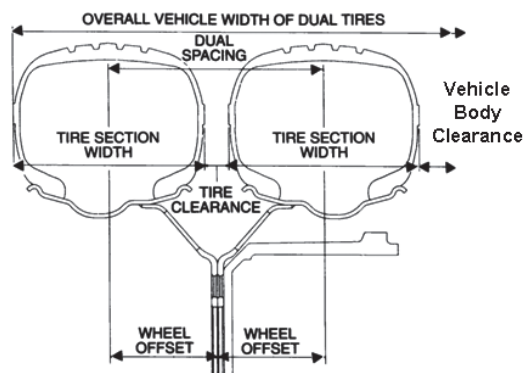

### 2022 Wheel Selection And Tire Spacing

Information from The Tire & Rim Association Yearbook

Tire Sizes	Design Rim Width <sup>(2)</sup>	Tire Section Width <sup>(3)</sup>	Minimum Dual Spacing <sup>(3)</sup>
<b>Light Truck</b>			
6.50 ★ 16LT <sup>(1)</sup>	4.50	7.15	8.30
7.50 ★ 16LT <sup>(1)</sup>	6.00	8.65	10.00
LT215/85R16	6.00	8.50	9.88
LT225/75R16	6.00	8.78	10.20
LT245/75R16	7.00	9.76	11.34
LT265/75R16	7.50	10.51	12.20
LT285/75R16	8.00	11.26	13.07
LT235/70R16	7.00	9.45	10.94
LT235/85R16	6.50	9.25	10.75
LT255/70R16	7.50	10.24	11.89
LT255/85R16	7.00	10.04	11.65
LT275/70R16	8.00	10.98	12.76
LT235/80R17	6.50	9.25	10.75
LT265/70R17	8.00	10.71	12.44
<b>Medium And Heavy Truck</b>			
9R17.5HC	6.75	9.00	10.30
10R17.5HC	7.50	10.00	11.40
8R19.5	6.00	8.00	9.10
225/70R19.5	6.75	8.90	10.00
245/70R19.5	7.50	9.76	10.98
265/70R19.5	7.50	10.31	11.61
305/70R19.5	9.00	12.01	13.50
9R22.5	6.75	9.00	10.30
10R22.5	7.50	10.00	11.40
11R22.5	8.25	11.00	12.50
12R22.5	9.00	11.80	13.50
235/80R22.5	6.75	9.17	10.31
245/75R22.5	7.50	9.76	10.98
255/70R22.5	7.50	10.04	11.30
265/75R22.5	7.50	10.31	11.61
275/80R22.5	8.25	10.87	12.24
295/75R22.5	9.00	11.73	13.19
305/75R22.5	9.00	12.01	13.50
315/80R22.5	9.00	12.28	13.82
11R24.5	8.25	11.00	12.50
12R24.5	9.00	11.80	13.50
275/80R24.5	8.25	10.87	12.24
285/75R24.5	8.25	11.14	12.52

<sup>(1)</sup> A ★ denotes both radial and bias tires.

<sup>(2)</sup> For additional approved rim contours and widths see page 39.

<sup>(3)</sup> Tire section width and minimum dual spacings will change 0.1" for each 1/4" change in rim width from the design rim width.

## CHANGEOVER FROM TUBE-TYPE TO TUBELESS TIRES

Tubeless tires mounted on one-piece 15° drop center rims are completely interchangeable with tube-type tires and rims on the same cast spoke wheels except for cast spoke wheels designed to carry 8.5 and wider tube-type rims. When making a tubeless conversion, the first step is to select the proper replacement tubeless tire and drop-center rim.


The next step is to determine the dual spacing of the original rim and spacer band combination for 5° and FL rims. Find the dual spacing for the new tubeless assembly using the original size spacer band. If this spacing varies considerably from that of the original

tube-type assembly, the clearance between tires, vehicle body clearance, and/or overall width of dual tires may be incorrect. These conditions will require a change in width of the spacer bands and possibly the clamps.

### 2022 Tubeless Tire and Rim Changeover Table

Information from The Tire & Rim Association Yearbook

Tube-Type Tire (Width x Dia.)	Replaced by Tubeless (Width x Dia.)	Preferred Tire Rim (Dia. x Width)	Alternate Tubeless Rim (Dia. x Width)
8.25R15TR	9R17.5HC	17.5 x 6.75HC	---
9.00R15TR	10R17.5HC	17.5 x 7.50HC	17.5 x 6.75HC
8.25R20	9R22.5	22.5 x 6.75	22.5 x 7.50/6.00
9.00R20	10R22.5	22.5 x 7.50	22.5 x 6.75
10.00R20	11R22.5	22.5 x 8.25	22.5 x 7.50
10.00R22	11R24.5	24.5 x 8.25	24.5 x 7.50
11.00R20	12R22.5	22.5 x 9.00	22.5 x 8.25
11.00R22	12R24.5	24.5 x 9.00	24.5 x 8.25

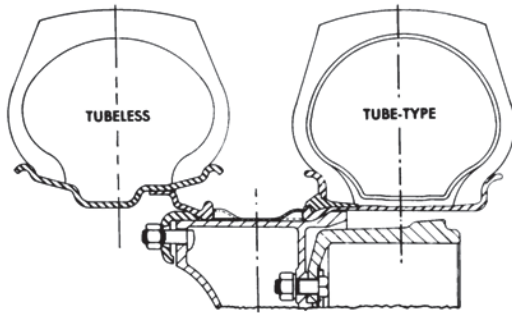

### Available Accuride Educational, Informational, and Training Items

ITEM DESCRIPTION	ITEM DESCRIPTION
<b>CATALOGS</b> Wheel and Rim Catalog - English <b>SAFETY AND SERVICE MANUALS</b> Safety/Service Manuals - English Safety/Service Manuals - Spanish	<b>VIDEO</b> Accuride Wheels Service Video
<b>CHARTS</b> Accuride Rim & Ring Matching Wall Chart System Identification Chart Wheel Out of Service Wall Chart WRIS Nut Torque Chart	<b>OTHER</b> Hub-Piloted, 8-Hole, 275mm Bolt Circle chassis label Hub-Piloted, 10-Hole, 285.75mm Bolt Circle chassis label Nut and Chamfer Gage Kit (P/N 5400) Aluminum Wheel Flange Wear Gage #5401K *Accuride Touch Up Pens (Gray 5416, White 5417, Black 5415) *Accuride Touch Up Spray Paint Can (Gray #5411, White #5412, Black #5413)

**⚠️ \*WARNING:** This product can expose you to chemicals including ethyl alcohol, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

The Accuride Rim/Wheel Safety & Service Manual and other educational, informational, and training items are available free of charge at [www.AccurideCorp.com](http://www.AccurideCorp.com). You may also write to Literature Distribution, Accuride, 38777 Six Mile Road, Suite 410, Livonia, MI or call (800) 626-7096 to receive free copies. Outside the US call (812) 962-5000. You should not, nor should you let your employees, service rims/wheels unless they are thoroughly trained and completely understand this safety information.

# CHART FOR PROPERLY MATCHING TRUCK TIRES TO WHEELS

Information obtained from the 2022 Tire & Rim Association Yearbook

Tire Size <sup>(1)</sup>	Approved Rim Contours <sup>(2)</sup>	Tire Size <sup>(1)</sup>	Approved Rim Contours <sup>(2)</sup>
<b>LIGHT TRUCKS</b>		<b>MEDIUM AND HEAVY DUTY TRUCKS</b>	
6.50 ★ 16LT	4½K, 4.50E, 5K, 6K, 6L	11.00R24	7.5, 8.0, 8.5, 8.50VM
7.50 ★ 16LT	5.50F (SDC), 6K, 6L, 6½L, 7L	12.00R24	8.0, 8.5, 8.50VM, 9.0
LT225/75R16	6J, 6½J, 7K	8R19.5	5.25, 6.00, 6.00RW, 6.75, 6.75RW
LT245/75R16	6½J, 7J, 7½J, 8J	225/70R19.5	6.00, 6.00RW, 6.75, 6.75RW
LT265/75R16	7J, 7½J, 8J	245/70R19.5	6.75, 6.75RW, 7.50, 7.50RW
LT285/75R16	7½J, 8J, 8½J, 9J	265/70R19.5	7.50, 7.50RW, 8.25, 8.25RW
LT215/85R16	5½J, 6J, 6½J, 7J	305/70R19.5	8.25, 8.25RW, 9.00
LT235/80R17	6J, 6½J, 7J, 7½J	9R22.5	6.00, 6.75, 7.50
LT235/85R16	6J, 6½J, 7J, 7½J	10R22.5	6.75, 7.50, 8.25
LT255/85R16	6½J, 7J, 7½J, 8J	235/80R22.5	6.75, 7.50
LT235/70R16	6J, 6½J, 7J, 7½J	245/75R22.5	6.75, 7.50
LT255/70R16	6½J, 7J, 7½J, 8J	255/70R22.5	6.75, 7.50, 8.25
LT265/70R17	7J, 7½J, 8J, 8½J	265/75R22.5	7.50, 8.25
LT275/70R16	7J, 7½J, 8J, 8½J	11R22.5	7.50, 8.25
8.75R16.5	6.00, 6.75	275/80R22.5	7.50, 8.25, 9.00
9.50R16.5	6.75, 8.25	295/75R22.5	8.25, 9.00
<b>LOW PLATFORM TRAILERS</b>		305/75R22.5	8.25, 9.00
9R17.5HC	6.75HC, 6.75	12R22.5	8.25, 9.00
215/75R17.5HC	6.00HC, 6.75HC	315/80R22.5	8.25, 9.00, 9.75
10R17.5HC	6.75HC, 7.50HC, 6.75, 7.50	11R24.5	7.50, 8.25
		275/80R24.5	7.50, 8.25, 9.00
		12R24.5	8.25, 9.00
		285/75R24.5	7.50, 8.25, 9.00
		<b>WIDE BASE (DUPLEX®)</b>	
		15R22.5	11.75, 12.25
		385/65R22.5	11.75, 12.25
		16.5R22.5	12.25, 13.00
		425/65R22.5	12.25, 13.00, 14.00
		445/50R22.5	14.00, 15.00
		445/65R22.5	13.00, 14.00
		455/55R22.5	14.00, 15.00
		18R22.5	13.00, 14.00

<sup>(1)</sup> A ★ denotes both radial and bias tires. An R indicates radial tires only.  
<sup>(2)</sup> SDC denotes semi-drop center rims.  
 Note: For tire sizes not shown, consult the Tire Manufacturer for approved rim contours.

Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels

General Information

## OFFSET VS. INSET/OUTSET


Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels


Duplex® Disc Wheels

Light Truck Wheels

General Information

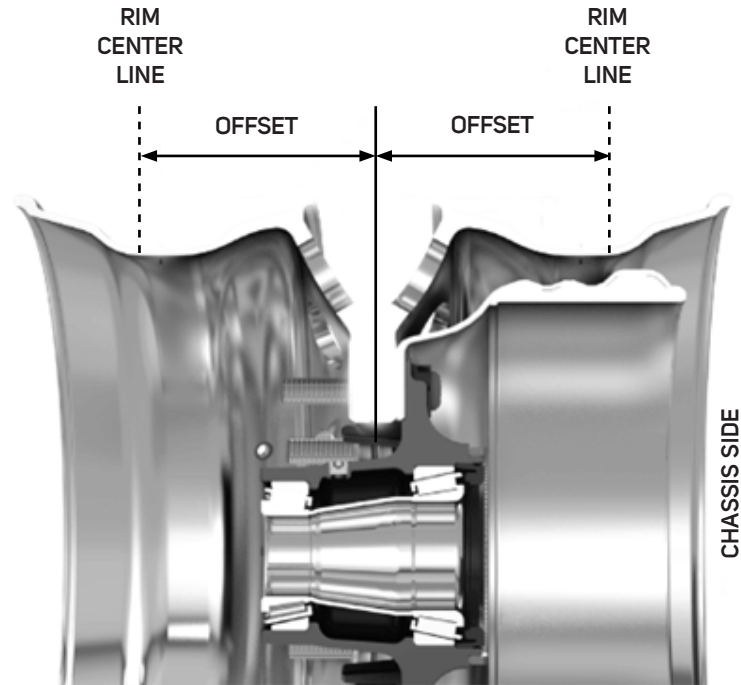

Any wheel that is capable of being assembled in a dual wheel application utilizes the **OFFSET** measurement.

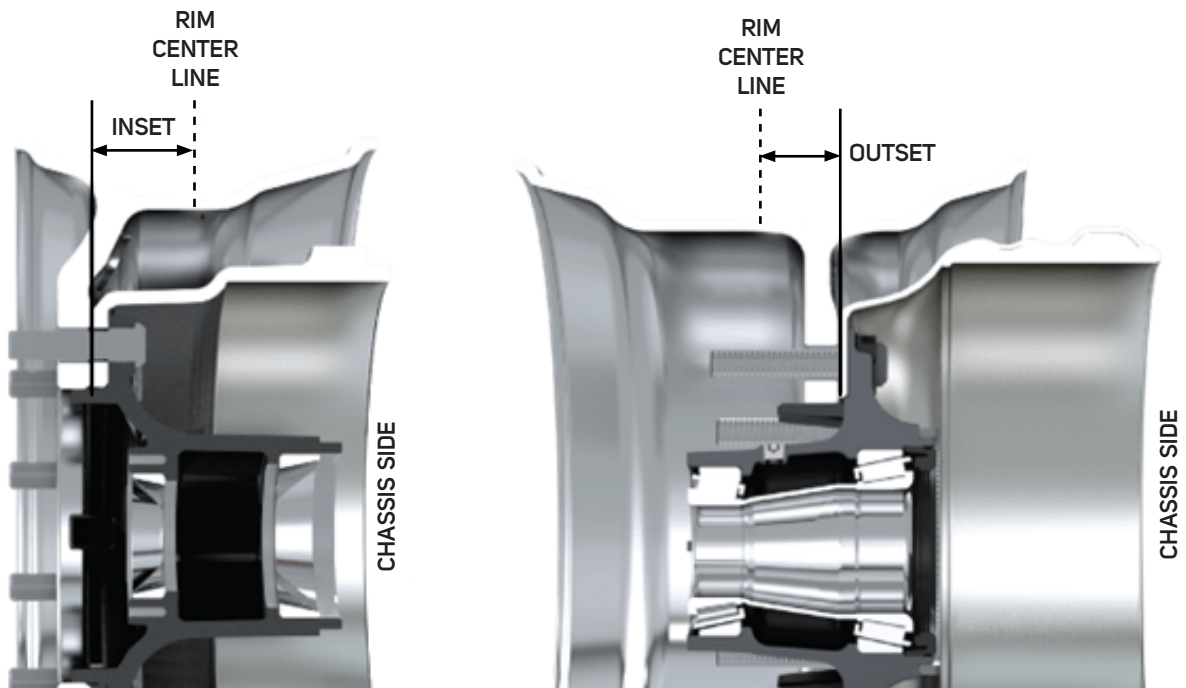

An inset or outset is utilized when a wheel cannot be used in a dual application.

**INSET** – The wheel centerline is inboard of the hub/drum mounting surface.

**OUTSET** – The wheel centerline is outboard of the hub/drum mounting surface.



## OBSOLETE PART NUMBER INDEX

Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>	Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>
240 - 5° - 1	20 x 7.0 - 5° <sup>(3)</sup>	Dem				25622	22 x 8.0 - 5° <sup>(3)</sup>	10H - 11.25"	6.88		
262FL2 - 1	20 x 7.5 FL <sup>(3)</sup>	Dem				25662	20 x 7.5 - 5° <sup>(3)</sup>	10H - 11.25"	6.38		
276-5-1	22 x 8.0 - 5° <sup>(3)</sup>	Dem	5.00			25666	20 x 8.0 - 5° <sup>(3)</sup>	10H - 11.25"	6.38		
277-5-1	24 x 8.0 - 5° <sup>(3)</sup>	Dem	5.00			25668	20 x 8.0 - 5° <sup>(3)</sup>	10H - 11.25"	6.88		
241D5LR	22 x 7.0 - 7.5 - 8.0 - 5°	Lock Ring				25672	22.5 x 8.25	10H - 11.25"	6.38		27833C
242D5LR	24 x 7.0 - 7.5 - 8.0 - 5°	Lock Ring				26039	20 x 7.5 - MS	10H - 11.25"	6.75		
263D5SR	22 x 8.0 - 5°	Side Ring				26205	19.5 x 14.00 WHL	10H - 11.25"	3.06		
264D5SR	24 x 8.0 - 5°	Side Ring				26357	20 x 7.5 - MS	6H - 8.75"	6.25		
276D51X	22 x 8.0 - 5° <sup>(3)</sup>	Rim Only				26385	22.5 x 14.00 WHL	10H - 11.25"	3.06		
277D51X	24 x 8.0 - 5° <sup>(3)</sup>	Rim Only				26386	22.5 x 14.00 WHL	10H - 11.25"	0.44		
312 - 5 - 1	20 x 8.5 - 5° <sup>(3)</sup>	Dem				26414	22.5 x 14.00	Rear Dem		2.75	
313 - 5 - 1	24 x 8.5 - 5° <sup>(3)</sup>	Dem	5.30			26415	22.5 x 14.00	Rear Dem		0.56	
313D51X	24 x 8.5 - 5° <sup>(3)</sup>	Rim Only				26464	20 x 8.0 - 5° <sup>(3)</sup>	10H - 11.25"	6.62		
313D5LR	24 x 8.5 - 5° <sup>(3)</sup>	Lock Ring				26538	20 x 6.5 FL <sup>(3)</sup>	6H - 8.75"	6.50		
313D5SR	24 x 8.5 - 5° <sup>(3)</sup>	Side Ring				26580	22.5 x 14.00	Front Dem <sup>(4)</sup>		5.82	
13180	22.5 x 14.00 WHL	10H - 11.25"	4.75	4.12		26642	22.5 x 14.00 WHL	10H - 11.25"	4.25	3.62	
13189	22.5 x 14.00	Front Dem <sup>(4)</sup>				26654	22.5 x 14.00 WHL	10H - 11.25"	3.69	3.06	
13224	22.5 x 13.00	Front Dem		5.00		26660	22.5 x 14.00 WHL	10H - 11.25"		1.63	
13228	22.5 x 13.00	Front Dem	3.94			26738	19.5 x 13.00	Front Dem		2.44	
13229	22.5 x 12.25	Front Dem	5.44			26785	22.5 x 13.00 WHL	10H - 11.25"	3.06		
13244	22.5 x 13.00	Front Dem	5.62			26786	22.5 x 13.00 WHL	10H - 11.25"	0.41		
13257	19.5 x 12.25 WHL	10H - 11.25"	1.70			26787	22.5 x 13.00	Rear Dem			
13279	22.5 x 12.25	Front Dem		4.44		26788	22.5 x 13.00	Rear Dem			
13290	22.5 x 12.25	Front Dem				26793	19.5 x 13.00 WHL	10H - 11.25"	3.06		
13293	22.5 x 14.00 WHL	10H - 11.25"	3.69	3.06		26794	19.5 x 13.00 WHL	10H - 11.25"	0.44	0.19	
13298	22.5 x 13.00	Front Dem		1.20		26811	22 x 8.0 - 5° <sup>(3)</sup>	10H - 11.25"	6.65		
13308	22.5 x 13.00	Front Dem		2.50		26831	22.5 x 14.00 WHL	10H - 13.188"		7.12	
13333	22.5 x 14.00 WHL	10H - 11.25"	5.75	5.25		26870	19.5 x 14.00 WHL	10H - 11.25" <sup>(4)</sup>	4.88	4.25	
13348	19.5 x 12.25 WHL	10H - 11.25" <sup>(5)</sup>	3.12	2.50		26874	22.5 x 14.00 WHL	10H - 11.25"	5.25	4.62	
13349	22.5 x 13.00	Front Dem <sup>(5)</sup>		5.62		26875	19.5 x 14.00 WHL	10H - 11.25" <sup>(4)</sup>	5.25	4.62	
13350	22.5 x 12.25	Front Dem		4.75		26886	22.5 x 14.00	Rear Dem		2.93	
13351	22.5 x 12.25	Front Dem		3.63		26887	22.5 x 14.00 WHL	10H - 11.25"	5.75	5.25	
13354	22.5 x 13.00	Rear Dem				26891	19.5 x 14.00 WHL	10H - 11.25"	3.69	3.06	
13491	22.5 x 12.25	Front Dem		6.44		26894	19.5 x 14.00 WHL	10H - 11.25" <sup>(4)</sup>	4.72	4.09	
13580	22.5 x 14.00	Front Dem		4.17		26915	22.5 x 14.00 WHL	10H - 13.188"	6.25	5.75	
25415	22.5 x 8.25	10H - 11.25"	6.62		27834C	26917	20 x 7.5 - FL <sup>(3)</sup>	10H - 11.25"	6.38		
25430	22.5 x 8.25	10H - 11.25"	6.62		27833C	26919	22.5 x 13.00	Front Dem		3.25	
25438	20 x 7.0 - 5° <sup>(3)</sup>	10H - 11.25"	6.50			26920	19.5 x 13.00 WHL	10H - 11.25"		2.75	
25441	20 x 7.5 - FL <sup>(3)</sup>	10H - 11.25"	6.50			26934	22.5 x 14.00 WHL	10H - 11.25"	6.25	5.75	
25451	22.5 x 7.50	10H - 11.25"	6.12		27403	26935	22.5 x 14.00 WHL	10H - 11.25" <sup>(4)</sup>	4.38	3.75	
25495	22.5 x 8.25	10H - 11.25"	6.62		27833C	26940	22.5 x 14.00	Rear Dem			
25524	20 x 8.0 - 5° <sup>(3)</sup>	10H - 11.25"	6.62			26942	22.5 x 13.00	Front Dem		5.83	
25617	22 x 7.5 - 5° <sup>(3)</sup>	10H - 11.25"	6.56			26965	22.5 x 14.00	Rear Dem			

<sup>(1)</sup> Outset/Inset—(Inches) See Pg. 40 or Pg. 48 for definition

<sup>(2)</sup> Check vehicle clearances prior to mounting tire.

<sup>(3)</sup> Tubeless wheel/rim available. See catalog.

<sup>(4)</sup> Well Welded—check clearance I.D. upon replacement.

<sup>(5)</sup> Reinforced Flanges.

<sup>(6)</sup> Replacement wheel has a different disc contour which allows less clearance for brakes. Check clearance before ordering.

<sup>(7)</sup> Check clearance.

<sup>(8)</sup> This wheel has a .453" valve hole. Wheels supplied on original vehicle have a .625" valve hole.

## OBSOLETE PART NUMBER INDEX

Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>	Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>
27048	22.5 x 14.00 WHL	10H - 11.25"	3.06			27760	22.5 x 14.00 WHL	10H - 13.188"HD		7.12	
27079	20 x 7.5 - FL <sup>(3)</sup>	10H - 11.25"	6.12			27765	22.5 x 8.25	10H - 11.25"B	6.62		27834C <sup>(7)</sup>
27089	22.5 x 13.00 WHL	10H - 11.25"		5.81		27766	22.5 x 8.25	10H - 11.25"B	6.62		27834C <sup>(7)</sup>
27093	22.5 x 13.00	Front Dem		4.50		27772	16 x 5.50 - F	8H - 6.50"	5.00		29587
27121	20 x 6.5 - CR <sup>(3)</sup>	6H - 8.75"	5.62			27773	22.5 x 12.25 WHL	10H - 13.188"HD		6.25	
27122	20 x 6.5 - CR <sup>(3)</sup>	6H - 8.75"	6.00			27774	19.5 x 6.00	8H - 6.50"	5.00		29015
27123	20 x 6.5 - CR <sup>(3)</sup>	10H - 11.25"	6.00			27775	19.5 x 6.00	10H - 7.25"	5.00		
27124	20 x 7.0 - CR <sup>(3)</sup>	6H - 8.75"	6.12			27784	22.5 x 6.75	6H - 8.75"	5.93		
27126	20 x 7.0 - CR <sup>(3)</sup>	10H - 11.25"	6.44			27785	22.5 x 6.75	10H - 8.75"	6.00		
27211	19.5 x 12.25 WHL	10H - 8.75" <sup>(4)</sup>	3.12	2.50		27791	22.5 x 14.00 WHL	10H - 13.188"HD		7.12	
27212	19.5 x 12.25 WHL	10H - 8.75"	0.44			27796	16 x 6K	8H - 6.50" I °C	5.00		
27215	19.5 x 12.25 WHL	10H - 11.25" <sup>(4)</sup>	3.12	2.50		27833	22.5 x 8.25	10H - 11.25"	6.62		27833C
27216	19.5 x 12.25 WHL	10H - 11.25"	0.44			27834	22.5 x 8.25	10H - 11.25"B	6.62		27834C
27221	22.5 x 12.25 WHL	10H - 11.25"	3.12	2.50		27836	22.5 x 8.25	10H - 11.25"	6.62		27404 <sup>(7)</sup>
27222	22.5 x 12.25 WHL	10H - 11.25"	0.44			27910	17.5 x 6.75	6H - 8.75"	5.62		28145
27225	22.5 x 12.25	Rear Dem	0.38	0.38		27913	22.5 x 13.00 WHL	10H - 11.25"	0.44		
27226	22.5 x 12.25	Rear Dem	1.87	1.87		27917	22.5 x 13.00 WHL	10H - 11.25"	3.06		
27233	22.5 x 12.25 WHL	10H - 11.25"		4.88		27922	16 x 5.5-F	8H - 6.50"	5.00		29587
27234	22.5 x 12.25 WHL	10H - 11.25"	5.06	4.56		27924	22.5 x 12.25 WHL	10H - 11.25"	0.44		
27235	22.5 x 12.25 WHL	10H - 11.25"	5.62	5.12		27944	22.5 x 6.75	10H - 11.25"	5.91		
27236	22.5 x 12.25 WHL	10H - 11.25"	6.80	6.30		27945	20 x 7.5 - 5" <sup>(3)</sup>	10H - 11.25"	6.50		
27238	19.5 x 12.25	Front Dem		2.44		27952	22.5 x 12.25 WHL	10H - 11.25"	5.18	4.56	
27239	22.5 x 12.25 WHL	10H - 13.188"		5.87		27953	22.5 x 12.25 WHL	10H - 11.25"	2.25	1.62	
27256	22.5 x 12.25 WHL	10H - 11.25"	6.25	5.75		27954	22.5 x 12.25 WHL	10H - 11.25"	3.12	2.50	
27257	22.5 x 12.25 WHL	10H - 11.25"	2.25	1.62		27955	22.5 x 12.25 WHL	10H - 11.25"	4.25	3.62	
27258	22.5 x 12.25 WHL	10H - 11.25"	6.39	5.89		27956	22.5 x 12.25 WHL	10H - 11.25"	4.75	4.12	
27271	22.5 x 12.25 WHL	10H - 11.25"	4.62	4.12		27957	22.5 x 12.25 WHL	10H - 11.25"	5.75	5.12	
27292	22.5 x 12.25 WHL	10H - 11.25"	7.06	6.56		27958	22.5 x 13.00 WHL	10H - 11.25"	5.88	5.25	
27344	20 x 7.0 - LB <sup>(3)</sup>	10H - 11.25"	6.12			27959	22.5 x 13.00 WHL	10H - 11.25"	3.69	3.06	
27355	22.5 x 14.00 WHL	10H - 13.188"HD		6.62		27960	22.5 x 13.00 WHL	10H - 11.25"	5.25	4.62	
27461	22.5 x 8.25	10H - 11.25"	6.62		27833C <sup>(7)</sup>	27964	22.5 x 13.00 WHL	10H - 11.25"	4.25	3.62	
27471	22.5 x 8.25 AL	10H - 11.25"	6.59		28615	27967	19.5 x 12.25 WHL	10H - 8.75"	3.12	2.50	
27503	22.5 x 8.25	10H - 11.25"	6.62		27404 <sup>(7)</sup>	27968	19.5 x 12.25 WHL	10H - 8.75"	0.44		
27611	22.5 x 8.25	10H - 11.25"	6.62		27834C <sup>(7)</sup>	27969	19.5 x 12.25 WHL	10H - 11.25"	3.12	2.50	
27685	22.5 x 7.50	10H - 11.25"	6.44		27403	27970	19.5 x 12.25 WHL	10H - 11.25"	0.44		
27686	22.5 x 8.25	10H - 11.25"	6.62		27833C <sup>(7)</sup>	27980	19.5 x 13.00 WHL	10H - 11.25"	4.88	4.25	
27688	24.5 x 8.25	10H - 11.25"	6.62		27406	27981	19.5 x 13.00 WHL	10H - 11.25"	5.25	4.62	
27709	22.5 x 8.25	10H - 11.25"	6.62		27834C <sup>(7)</sup>	27982	19.5 x 13.00 WHL	10H - 11.25"	4.72	4.09	
27721	22.5 x 14.00	Front Dem		4.75		27983	19.5 x 13.00 WHL	10H - 11.25"	4.38	3.75	
27727	20 x 6.5 - LB <sup>(3)</sup>	10H - 8.75"	5.84			27984	19.5 x 13.00 WHL	10H - 11.25"	0.31		
27728	20 x 7.0 - LB <sup>(3)</sup>	10H - 8.75"	6.02			27985	19.5 x 13.00 WHL	10H - 11.25"	3.06	2.43	
27742	22.5 x 12.25 WHL	10H - 13.188"		6.30		27994	16 x 6KS	8H - 6.50"	5.00		29587 <sup>(8)</sup>
27756	16 x 6KS	8H - 6.50"	5.00		29587 <sup>(8)</sup>	27995	16.5 x 6.00	8H - 6.50"	5.00		

<sup>(1)</sup> Outset/Inset—(Inches) See Pg. 40 or Pg. 48 for definition  
<sup>(2)</sup> Check vehicle clearances prior to mounting tire.  
<sup>(3)</sup> Tubeless wheel/rim available. See catalog.  
<sup>(4)</sup> Well Welded—check clearance I.D. upon replacement.  
<sup>(5)</sup> Reinforced Flanges.

<sup>(6)</sup> Replacement wheel has a different disc contour which allows less clearance for brakes. Check clearance before ordering.  
<sup>(7)</sup> Check clearance.  
<sup>(8)</sup> This wheel has a .453" valve hole. Wheels supplied on original vehicle have a .625" valve hole.

Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels

General Information

## OBSOLETE PART NUMBER INDEX

Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>	Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>
27997	22.5 x 13.00	Rear Dem		2.75		28379	22.5 x 13.00 WHL	10H - 13.188"HD <sup>(5)</sup>		7.12	
27998	22.5 x 13.00	Rear Dem		2.00		28396	22.5 x 13.00 WHL	10H - 13.188"HD <sup>(5)</sup>		6.81	
27999	22.5 x 12.25	Rear Dem		1.88		28408	22.5 x 8.25	10H - 285.75mm	6.62		51408
28000	16.5 x 6.75	8H - 6.50" I °C	5.38			28409	24.5 x 8.25	10H - 285.75mm	6.62		50409
28001	22.5 x 12.25	Rear Dem		1.88		28410	24.5 x 8.25	10H - 11.25"	6.62		27406
28004	19.5 x 6.00	10H - 8.75"	4.75			28414	22.5 x 6.75	8H - 275mm	5.93		
28118	22.5 x 12.25 WHL	10H - 11.25"	0.44			28415	22.5 x 7.50	8H - 275mm	6.44		29028
28119	22.5 x 12.25 WHL	10H - 11.25"	2.25	1.62		28433	19.5 x 14.00 WHL	10H - 11.25"	4.63	4.00	29307
28120	22.5 x 12.25 WHL	10H - 11.25"	3.12	2.50		28445	22.5 x 13.00 WHL	10H - 11.25"	5.88	5.25	
28122	22.5 x 14.00 WHL	10H - 11.25"	4.25	3.62		28452	24.5 x 8.25AL	10H - 285.75mm	6.59		42362
28124	22.5 x 12.25 WHL	10H - 11.25"	4.90	4.28		28460	20 x 6.5 - CR <sup>(3)</sup>	8H - 275mm	6.00		
28125	22.5 x 12.25 WHL	10H - 11.25"	4.25	3.62		28465	22.5 x 13.00	10H - 13.188"HD		6.12	
28126	22.5 x 12.25 WHL	10H - 11.25"	5.75	5.12		28466	19.5 x 6.75	8H - 275mm	5.50		50180
28127	22.5 x 13.00 WHL	10H - 11.25"	3.06			28473	24.5 x 8.25	10H - 11.25"	6.59		27599
28128	22.5 x 13.00 WHL	10H - 11.25"	0.44			28474	22.5 x 8.25	10H - 11.25"	6.59		28615
28132	22.5 x 12.25 WHL	10H - 11.25"	6.38	5.75		28476	22.5 x 8.25	10H - 11.25"	6.62		28476C
28157	22.5 x 6.75	6H - 8.75"	5.94			28484	22.5 x 8.25	8H - 275mm	6.62		
28158	22.5 x 6.75	10H - 11.25"	5.93			28487	22.5 x 8.25	10H - 285.75mm	6.62		51487
28160	22.5 x 6.75	10H - 8.75"	5.93			28492	22.5 x 7.50	10H - 335mm	6.50		
28165	22.5 x 12.25 WHL	10H - 11.25"	5.31	4.68		28511	16 x 6K	8H - 6.50"	5.00		29579
28167	22.5 x 13.00 WHL	10H - 13.188"HD		7.12		28512	16 x 6K	8H - 6.50"	5.35		29579
28169	22.5 x 13.00 WHL	10H - 11.25"	3.44	2.51		28513	16 x 6K	10H - 7.25"	5.35		
28174	22.5 x 13.00 WHL	10H - 13.188"HD	6.12			28520	19.5 x 6.00	6H - 8.75"	2.50		
28175	22.5 x 12.25 WHL	10H - 13.188"HD	6.25			28532	19.5 x 6.75	8H - 275mm	5.66		50180
28177	16 x 6K	8H - 6.50"	5.00		29587 <sup>(6)</sup>	28537	20 x 7.5 LW <sup>(3)</sup>	10H - 11.25"	6.50		
28179	19.5 x 6.00RW	6H - 8.75"	4.75			28538	20 x 8.0 LW <sup>(3)</sup>	10H - 11.25"	6.88		
28184	19.5 x 13.00 WHL	10H - 11.25"	4.72	4.09		28542	22.5 x 9.00	10H - 285.75mm	7.00		29300
28192	22.5 x 9.00	10H - 11.25"	3.12			28546	16 x 7K	8H - 6.50"		0.25	29508
28308	16 x 6K	8H - 6.50"	0.50			28547	24.5 x 8.25	10H - 285.75mm	6.59		29699
28322	16 x 6K	8H - 6.50" I °C	5.00			28548	22.5 x 8.25	10H - 285.75mm	6.59		40620
28324	17.5 x 8.25HC	10H - 8.75"	6.62		28112	28549	22.5 x 8.25	10H - 11.25"	6.62		27404
28326	22.5 x 13.00 WHL	10H - 11.25"	5.38	4.75		28550	22.5 x 12.25	Rear Dem	1.88		
28327	22.5 x 13.00 WHL	10H - 11.25"	4.24	3.62		28551	22.5 x 13.00	Rear Dem	2.75		
28333	16 x 6K	8H - 6.50"	5.00			28560	22.5 x 8.25AL	10H - 11.25"	6.59		28632
28338	22.5 x 13.00 WHL	10H - 13.188"HD		6.12		28572	22.5 x 13.00	10H - 13 3/16"		6.12	
28348	16.5 x 6.00	8H - 6.50"	5.00			28603	16 x 6K	8H - 6.50"	5.00		29587
28353	16 x 6K	8H - 6.50" I °C	5.00			28609	22.5 x 6.75	6H - 8.75"	5.93		
28356	16.5 x 6.00	8H - 6.50" I °C	5.00			28612	19.5 x 6.75RW	8H - 275mm	5.60		50180
28368	22.5 x 7.50	10H - 335mm	6.50			28613	22.5 x 8.25AL	10H - 285.75mm	6.59		40008
28374	16 x 6K	8H - 6.50"	5.00		29587 <sup>(6)</sup>	28618	16 x 6K	8H - 6.50"	5.15		29579
28375	16 x 6K	10H - 7.25	5.35			28623	16 x 6K	8H - 6.50"	5.00		29587
28377	20 x 7.5 - FL <sup>(3)</sup>	10H - 11.25"	6.25			28624	22.5 x 7.50	10H - 285.75mm	2.62		
28378	16 x 6K	8H - 6.50"	0.50			28626	22.5 x 8.25-15°	10H - 11.25"	6.59		28584

<sup>(1)</sup> Outset/Inset—(Inches) See Pg. 40 or Pg. 48 for definition

<sup>(2)</sup> Check vehicle clearances prior to mounting tire.

<sup>(3)</sup> Tubeless wheel/rim available. See catalog.

<sup>(4)</sup> Well Welded—check clearance I.D. upon replacement.

<sup>(5)</sup> Reinforced Flanges.

<sup>(6)</sup> Replacement wheel has a different disc contour which allows less clearance for brakes. Check clearance before ordering.

<sup>(7)</sup> Check clearance.

<sup>(8)</sup> This wheel has a .453" valve hole. Wheels supplied on original vehicle have a .625" valve hole.

## OBSOLETE PART NUMBER INDEX

Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>	Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>
28628	22.5 x 8.25-15°	10H - 11.25"	6.59		28615	29052	22.5 x 7.50-15°	8H - 285mm	162mm		
28630	22.5 x 13.00	Rear Dem	2.75			29054	22.5 x 12.25-15°	10H - 285.75mm	5.38	4.75	29807
28632	22.5 x 8.25	10H - 11.25"	6.59			29056	22.5 x 12.25-15°	10H - 285.75mm	6.38	5.75	29807
28633	19.5 x 14.00 WHL	10H - 11.25"	4.63	4.00		29064	24.5 x 8.25-15°	10H - 11.25"	6.59		
28640	22.5 x 9.00-15°	10H - 285.75mm	7.00		29730	29066	22.5 x 8.25-15°	10H - 11.25"	6.59		
28641	24.5 x 8.25	10H - 285.75mm	6.62		50641	29068	22.5 x 8.25AL-15°	10H - 285.75mm	6.59		42644
28642	22.5 x 7.50	10H - 285.75mm	6.44		29001	29070	24.5 x 8.25-15°	10H - 285.75mm			
28658	19.5 x 8.25RW	10H - 285.75mm	6.62			29094	22.5 x 8.25AL-15°	10H - 285.75mm			42644
28670	22.5 x 6.75	6H - 8.75"	5.93			29105	22.5 x 8.25AL-15°	10H - 285.75mm	6.59		42644
28671	16 x 6.00	10H - 7.25"	5.35			29110	22.5 x 8.25-15°	10H - 11.25"	6.59		28615
28680	19.5 x 6.75RW	8H - 275mm	5.60		50180	29112	22.5 x 8.25-15°	10H - 11.25"	6.59		28615
28682	16 x 6K	8H - 6.50"	5.15			29114	22.5 x 8.25-15°	10H - 285.75mm	6.59		
28684	22.5 x 13.00	10H - 11.25"		5.25		29116	22.5 x 8.25-15°	10H - 285.75mm	6.59		
28687	24.5 x 8.25-15°	10H - 11.25"	6.59			29118	24.5 x 8.25-15°	10H - 11.25"	6.59		27599
28689	24.5 x 8.25-15°	10H - 11.25"	6.59			29120	24.5 x 8.25-15°	10H - 11.25"	6.59		27599
28803	22.5 x 12.25-15°	10H - 285.75mm	4.63	4.00	29806	29122	24.5 x 8.25-15°	10H - 285.75mm	6.59		
28810	22.5 x 7.50	10H - 11.25"	6.45		28841	29124	24.5 x 8.25-15°	10H - 285.75mm	6.59		
28820	24.5 x 8.25-15°	10H - 285.75mm	6.59			29126	22.5 x 8.25AL-15°	10H - 285.75mm	6.59		42644
28824	22.5 x 8.25-15°	10H - 11.25"	6.59			29133	22.5 x 7.50-15°	10H - 11.25"	6.59		
28831	22.5 x 8.25-15°	10H - 285.75mm	6.59			29137	24.5 x 8.25AL-15°	10H - 285.75mm	6.59		42362/10H's
28832	22.5 x 8.25-15°	10H - 285.75mm	6.59			29138	16 x 6K	8H - 6.50"	5.00		29587
28837	24.5 x 8.25-15°	10H - 285.75mm	6.59			29146	22.5 x 13.00	10H - 285.75mm		0.63	
28839	24.5 x 8.25-15°	10H - 285.75mm	6.59			29147	22.5 x 12.25-15°	10H - 285.75mm		0.63	29805
28841	22.5 x 7.50	10H - 11.25"	6.45			29152	22.5 x 13.00-15°	10H-13.188"HD <sup>(5)</sup>		7.12	
28842	22.5 x 9.00	10H - 11.25"	7.00			29153	22.5 x 13.00-15°	10H-13.188"HD <sup>(5)</sup>		6.12	
28849	20 x 8.5 -5°	10H - 285.75mm	7.00			29154	16 x 7K	8H - 6.50"	0.25		
28852	22.5 x 8.25-15°	10H - 11.25"	6.59			29157	22.5 x 12.25-15°	10H-13.188"HD <sup>(5)</sup>		6.00	
28853	19.5 x 6.00	6H - 8.75"	5.00		29388	29161	16 x 6K	8H - 6.50"	0.50		
28855	20 x 8.5 -5°	10H - 11.25"	7.00			29164	22.5 x 7.50-15°	10H - 335mm	6.31		
28860	16 x 6K	6H - 222.25mm	5.00			29165	24.5 x 8.25AL-15°	10H - 285.75mm	6.59		42362
28865	24.5 x 8.25-15°	10H - 11.25"	6.59			29168	24.5 x 8.25-15°	10H - 285.75mm	6.62		28827
28867	24.5 x 8.25AL-15°	10H - 285.75mm	6.59		42644	29170	24.5 x 8.25AL-15°	10H - 285.75mm	6.59		42362
28869	22.5 x 6.75	8H - 275mm	5.70			29171	24.5 x 8.25AL-15°	10H - 285.75mm	6.59		42362
28889	22.5 x 12.25-15°	10H - 11.25"	4.63	4.00		29172	22.5 x 8.25AL-15°	10H - 285.75mm	6.59		42644
28899	20 x 10.0 -VE 5°	10H - 11.25"	6.62	6.00		29173	22.5 x 8.25AL-15°	10H - 285.75mm	6.59		42644
29020	20 x 8.0 -5°	10H - 335mm	6.77			29174	22.5 x 13.00-15°	10H - 285.75mm		2.62	
29021	24 x 8.5 -5°	10H - 335mm	7.62			29175	22.5 x 13.00-15°	10H-13.188"HD <sup>(5)</sup>		7.12	
29025	24 x 8.5 -5°	10H - 285.75mm	6.59			29176	22.5 x 13.00-15°	10H-13.188"HD <sup>(5)</sup>		6.81	
29027	22.5 x 8.25-15°	10H - 285.75mm	6.59			29177	22.5 x 13.00-15°	10H-13.188"HD <sup>(5)</sup>		6.12	
29028	22.5 x 7.50	8H - 275mm	6.20			29178	24.5 x 8.25AL-15°	10H - 285.75mm	6.59		42362
29030	22.5 x 8.25-15°	10H - 11.25"	6.59			29179	24.5 x 8.25AL-15°	10H - 285.75mm	6.59		42362
29035	22.5 x 8.25-15°	10H - 285.75mm	6.59			29181	20 x 8.0 -5° <sup>(3)</sup>	10H - 285.75mm	6.88		
29037	24.5 x 8.25-15°	10H - 285.75mm	6.59			29182	22.5 x 13.00-15°	10H - 11.25"	3.43	2.81	

<sup>(1)</sup> Outset/Inset—(Inches) See Pg. 40 or Pg. 48 for definition  
<sup>(2)</sup> Check vehicle clearances prior to mounting tire.  
<sup>(3)</sup> Tubeless wheel/rim available. See catalog.  
<sup>(4)</sup> Well Welded—check clearance I.D. upon replacement.  
<sup>(5)</sup> Reinforced Flanges.

<sup>(6)</sup> Replacement wheel has a different disc contour which allows less clearance for brakes. Check clearance before ordering.  
<sup>(7)</sup> Check clearance.  
<sup>(8)</sup> This wheel has a .453" valve hole. Wheels supplied on original vehicle have a .625" valve hole.

Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels

General Information

## OBSOLETE PART NUMBER INDEX

Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>	Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>
29183	22.5 x 12.25-15°	10H - 11.25"	4.62	4.00		29360	22.5 x 8.25-15°	10H - 285.75mm	6.59		
29184	24.5 x 8.25AL-15°	10H - 285.75mm	6.59		42362	29361	16 x 6.5J	8H - 6.50"	128mm		29588
29185	24.5 x 8.25AL-15°	10H - 285.75mm	6.59		42362	29362	24.5 x 8.25	10H - 285.75mm	6.59		42362
29186	19.5 x 6.00RW	8H - 225mm	5.35		29584	29364	22.5 x 9.00-15°	10H - 335mm	6.93		50593
29189	24.5 x 8.25AL-15°	10H - 285.75mm	6.59		42362	29368	17 x 6K	8H - 6.50"	5.35		
29207 <sup>(6)</sup>	19.5 x 6.00	10H - 7.25"	5.08"			29369	19.5 x 7.50RW-15°	8H - 275mm	6.25		40160
29211	22.5 x 12.25-15°	10H - 11.25"		0.63		29371	19.5 x 6.00-15°	8H - 170mm	136mm		
29215	22.5 x 13.00-15°	10H - 11.25"	3.25	2.62		29372	22.5 x 8.25-15°	10H - 285.75mm	6.59		
29216	22.5 x 13.00-15°	10H - 11.25"		0.63		29390	22.5 x 8.25-15°	10H - 11.25"	6.59		
29218	22.5 x 12.25-15°	10H - 11.25"	5.38	4.75		29393	20 x 10.0-VE 5°	10H - 285.75mm	4.63		
29220	22.5 x 12.25-15°	10H - 11.25"	4.63	4.00		29394	22.5 x 12.25-15°	10H - 11.25"	6.38	5.75	
29221	22.5 x 12.25-15°	10H - 11.25"	2.88	2.25		29395	17 x 7.5J				
29222	22.5 x 6.75-15°	10H - 11.25"	5.93			29396	22.5 x 8.25	10H - 285.75mm			51637
29223	16 x 6K	8H - 170mm	5.35			29398	16 x 6K	8H - 6.50"	0.25		29579
29232	16 x 7K	8H - 170mm	0.25			29399	16 x 6K	8H - 6.50"	5.15		29579
29236	19.5 x 6.75RW	8H - 225mm	5.50		29585	29508	16 x 7K	8H - 6.50"	0.25		
29237	19.5 x 7.50RW CAST	8H - 275mm	6.25		40160	29521	19.5 x 6.00RW	8H - 225mm	135.8 mm		29584
29301	22.5 x 13.00-15°	10H - 11.25"	4.95	4.32		29540	22.5 x 8.25	10H - 285.75mm	6.59		42644
29304	19.5 x 7.50RW CAST	10H - 285.75mm	6.25		41685	29543	22.5 x 8.25	10H - 285.75mm	6.59		
29305	17 x 6K	8H - 6.50"	5.00			29544	24.5 x 8.25	10H - 285.75mm	6.59		
29307	19.5 x 14.00-15°	10H - 11.25"	4.63	4.00		29546	22.5 x 9.00-15°	10H - 285.75mm	3.12		29039 <sup>(4)</sup>
29309	24.5 x 8.25 CAST	10H - 285.75mm	6.59		42362	29549	22.5 x 8.25	10H - 285.75mm	6.59		
29311	20 x 10.0 -VE 5°	10H - 11.25"	1.56			29550	24.5 x 8.25	10H - 285.75mm	6.59		
29314	22.5 x 12.25-15°	10H - 11.25"	5.31	4.68		29551	17 x 7.5J				
29315	16 x 6K	8H - 6.50"			29579	29555	22.5 x 8.25AL-15°	10H - 285.75mm	6.59		42644
29316	16 x 6K	8H - 6.50"	5.35		29579	29571PK	22.5 x 8.25-15°	10H - 11.25"	6.62		27833C/5HH's
29317	16 x 6K	8H - 6.50"			29579	29575	16 x 6K	8H - 6.50"	0.50		
29318	16 x 6K	8H - 6.50"	5.15		29579	29576	16 x 7K	8H - 6.50"	0.25		
29319	16 x 7K	8H - 6.50"	0.25		29508	29577	16 x 6K	8H - 6.50"	5.00		29579
29329	22.5 x 7.50	8H - 275mm	6.45			29578	16 x 6K	8H - 6.50"	5.35		29579
29330	24.5 x 8.25-15°	10H - 11.25"	6.62			29580	16 x 6K	8H - 6.50"	5.15		29579
29330C	24.5 x 8.25-15°	10H - 11.25"	6.62			29581	16 x 6K	10H - 7.25"	5.35		
29331	22.5 x 6.75-15°	8H - 275mm	5.70		28869	29582	16 x 7K	8H - 170mm	6.35mm	0.25	
29333	22.5 x 7.50	10H - 285.75mm	6.45			29583	16 x 6K	8H - 170mm	5.35		
29334	16 x 6K	8H - 6.50"	5.00		29587	29585	19.5 x 6.75RW	8H - 225mm	5.50		
29339	17 x 7.5K	5H - 135mm	0.55			29586	17 x 6K	8H - 170mm	5.00		
29340	17 x 7.5J					29602	19.5 x 8.25RW	10H - 285.75mm	6.63		41602
29342	19.5 x 7.50RW-15°	10H - 285.75mm	6.25		41685	29610	20 x 10.0 -VE 5°	10H - 335mm		6.00	
29344	22.5 x 8.25-15°	8H - 285mm	164mm			29611	20 x 10.0 -VE 5°	10H - 335mm		5.00	29911
29346	24.5 x 8.25-15°	10H - 285.75mm	6.59			29624	17 x 7.5J	5H - 135mm	14.00mm		
29350	16 x 6K	8H - 6.50"	5.00		29587	29625	17 x 7.5J	5H - 135mm	14.00mm		
29352	22.5 x 8.25-15°	10H - 285.75mm	6.59		42644	29626	17 x 7.5J	5H - 135mm	14.00mm		
29356	17 x 6K	8H - 6.50"	5.00			29637	22.5 x 8.25	10H - 285.75mm	6.59		51637

<sup>(1)</sup> Outset/Inset—(Inches) See Pg. 40 or Pg. 48 for definition

<sup>(2)</sup> Check vehicle clearances prior to mounting tire.

<sup>(3)</sup> Tubeless wheel/rim available. See catalog.

<sup>(4)</sup> Well Welded—check clearance I.D. upon replacement.

<sup>(5)</sup> Reinforced Flanges.

<sup>(6)</sup> Replacement wheel has a different disc contour which allows less clearance for brakes. Check clearance before ordering.

<sup>(7)</sup> Check clearance.

<sup>(8)</sup> This wheel has a .453" valve hole. Wheels supplied on original vehicle have a .625" valve hole.

## OBSOLETE PART NUMBER INDEX

Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>	Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>
29644	22.5 x 8.25	10H - 285.75mm			42644	29837	17 x 6.5J	8H - 200mm	5.56		
29646	22.5 x 8.25	10H - 285.75mm	6.59			29839	19.5 x 6.00RW	10H - 225mm	5.35		29884
29648	24.5 x 8.25	10H - 285.75mm	6.59			29841	17 x 7.5J	8H - 170mm	40mm		
29660	22.5 x 14.00	10H - 285.75mm	2.00		43142	29842TK	20 x 8.0 - 5° <sup>(3)</sup>	10H - 285.75mm	6.88		
29685	19.5 x 7.50RW	10H - 285.75mm	6.25		41685	29846TK	22.5 x 9	10H - 335mm	6.93		50593
29668	16 x 4T					29850	20 x 10.0-5°				
29670	22.5 x 8.25	10H - 285.75mm	6.59			29855	18 x 8J	8H - 170mm	40mm		
29677	22.5 x 12.25 - 15	10H - 285.75mm	5.38	4.25		29856	17 x 7.5J	8H - 170mm	40mm		
29679	22.5 x 13.00 - 15	10H - 285.75mm	5.63	4.50		29857	20 x 10.0 - 5°				
29681	22.5 x 9.00	10H - 285.75mm	7.00			29875	19.5 x 6.75RW	10H - 225mm	5.50		
29697	22.5 x 8.25	10H - 285.75mm	6.59			29889	16 x 6K				29583
29699	24.5 x 8.25				40699	29890TK	22.5 x 14.00	10H - 287.75mm	2.00	1.375	29627
29701	22.5 x 8.25	10H - 285.75mm	6.59			29891TK	22.5 x 14.00	10H - 287.75mm	0.00	0.625	50172
29703	22.5 x 8.25	10H - 285.75mm	6.59			29911	20 x 10.0 - 5°				
29705	24.5 x 8.25				40699	29922	20 x 10.0 - 5°				
29707	24.5 x 8.25				40699	29923	21 x 18.0 - 5°				
29717	19.5 x 6.00RW	8H - 275mm	5.00			29943	16 x 6K	8H - 6.5"	5.15		29579
29720	22.5 x 8.25	10H - 285.75mm	6.59			30872	19.5 x 13.00-15°	10H - 11.25"	0.31		
29730	22.5 x 9.00	10H - 285.75mm	7.00		41730	30645225	22.5 x 7.50-15°	Dem	4.50		
29736	19.5 x 6.75RW	8H - 225mm	5.50		29585	30371225	22.5 x 7.50		4.26		
29740	21 x 18	10H - 335mm		2.75		30375225	22.5 x 7.50-15°	Dem	4.40		
29745	19.5 x 6.00RW	8H - 225mm	5.35		29584	30375245	24.5 x 8.25-15°	Dem	4.40		
29746	16 x 6K	8H - 170mm	5.35			30391225	22.5 x 8.25		4.75		
29747	16 x 6.5J					30391245	24.5 x 8.25		4.75		
29748	20 x 10.00-5°					31061	22.5 x 14.00-15°	Rear Dem			
29784	19.6 x 6.00-15°	10H - 7.25"	4.60		27775	31291	22.5 x 12.25-15°	Front Dem		1.11	
29787	16 x 4T	5H - 4.50"	0.94			31292	22.5 x 12.25-15°	Front Dem		2.00	40620
29801	16 x 7J	5H - 5.50"	12mm			31293	22.5 x 12.25-15°	Front Dem		2.62	
29808	22.5 x 12.25	10H - 285.75mm		5.75	29807	31294	22.5 x 12.25-15°	Front Dem		3.00	
29809TK	22.5 x 13.00 - 15°	10H - 285.75mm		0.63		31295	22.5 x 12.25-15°	Front Dem		3.44	
29810TK	22.5 x 13.00 - 15°	10H - 285.75mm		2.62	29174	31296	22.5 x 12.25-15°	Front Dem		3.75	
29811TK	22.5 x 13.00 - 15°	10H - 285.75mm		4.32		31297	22.5 x 12.25-15°	Front Dem		4.00	
29812TK	22.5 x 13.00 - 15°	10H - 285.75mm		5.25	29057	31298	22.5 x 12.25-15°	Front Dem		4.44	
29813	22.5 x 13.00 - 15°	10H - 285.75mm		5.25	29057	31299	22.5 x 12.25-15°	Front Dem		4.75	
29814TK	22.5 x 12.25	10H - 11.25"	0.63			31300	22.5 x 12.25-15°	Front Dem		5.44	
29815TK	22.5 x 12.25	10H - 11.25"		4.00		313-5-1	24x 8.5-5°				
29816	22.5 x 12.25	10H - 11.25"		4.75		31614	22.5 x 12.25-15°	Front Dem		4.75	
29817TK	22.5 x 12.25	10H - 11.25"		5.75		31656	22.5 x 13.00-15°	Front Dem		3.94	
29818	22.5 x 13.00	10H - 11.25"	0.63			31658	22.5 x 12.25	Rear Dem	0.38		
29819TK	22.5 x 13.00	10H - 11.25"		2.62		31659	22.5 x 13.00	Rear Dem	0.00		
29820TK	22.5 x 12.25	10H - 11.25"		4.32		31671	22.5 x 12.25-15°	Front Dem		1.10	
29829TK	20 x 8.0 - 5° <sup>(3)</sup>	10H - 11.25"	6.88			31673	22.5 x 12.25-15°	Front Dem		2.62	
29831TK	20 x 7.5 - 5° <sup>(3)</sup>	10H - 285.75mm	6.65			31674	22.5 x 12.25		3.00		
29832TK	20 x 7.5 - 5° <sup>(3)</sup>	10H - 11.25"	6.50			31675	22.5 x 12.25-15°	Front Dem		3.44	

<sup>(1)</sup> Outset/Inset—(Inches) See Pg. 40 or Pg. 48 for definition  
<sup>(2)</sup> Check vehicle clearances prior to mounting tire.  
<sup>(3)</sup> Tubeless wheel/rim available. See catalog.  
<sup>(4)</sup> Well Welded—check clearance I.D. upon replacement.  
<sup>(5)</sup> Reinforced Flanges.

<sup>(6)</sup> Replacement wheel has a different disc contour which allows less clearance for brakes. Check clearance before ordering.  
<sup>(7)</sup> Check clearance.  
<sup>(8)</sup> This wheel has a .453" valve hole. Wheels supplied on original vehicle have a .625" valve hole.

Hub-Piloted  
Tubeless Wheels

Stud-Piloted  
Tubeless Wheels

Duplex® Disc Wheels

Light Truck Wheels

General Information

## OBSOLETE PART NUMBER INDEX

Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>	Part Number	Size	Mounting Type	Outset <sup>(1)</sup>	Inset <sup>(1)</sup>	Potential Replace <sup>(2)</sup>
31676	22.5 x 12.25-15"	Front Dem		3.75		41140	22.5 x 14.00	10H - 285.75mm	0.50		43140
31677	22.5 x 12.25		4.00			41142	22.5 x 14.00	10H - 285.75mm	2.00		43142
31678	22.5 x 12.25-15"	Front Dem		4.44		41660	22.5 x 14.00	10H - 285.75mm	2.00		43142
31679	22.5 x 12.25		4.75			42140	22.5 x 14.00	10H - 285.75mm	0.50		43140
31680	22.5 x 12.25-15"	Front Dem		5.44		42142	22.5 x 14.00	10H - 285.75mm	2.00		43142
31681	22.5 x 13.00-15"	Front Dem		3.50		42644	22.5 x 8.25	10H - 285.75mm	6.59		43644
31682	22.5 x 13.00-15"	Front Dem		4.75		50052	22.5 x 12.25				
31686225	22.5 x 9.00-15"	Dem	5.00			50082	20 x 10.00				
31689	22.5 x 13.00-15"	Front Dem		4.50		50165	22.5 x 12.25	10H - 285.75mm		5.25	29807
31703	22.5 x 12.25-15"	Front Dem		4.00		50194	20 x 10.00				
31716175	17.5 x 6.75HC	Dem	4.00			50232	19.5 x 6.75RW	8H - 275mm	5.00		
31814175	17.5 x 8.25HC	Dem	4.75			50257	20 x 10.00				
31871225	22.5 x 6.75-15"	Dem	3.90			50264	17. x 7.5				
31986	22.5 x 12.25-15"	Front Dem		4.44		50274	16 x 7J	5H - 5.50"	12mm		
32201TK	22.5 x 13.00-15"	Front Dem	3.94			50275	17 x 6.5J	8H - 200mm	5.56		
32202TK	22.5 x 13.00-15"	Front Dem	5.62			50276	18 x 8J	8H - 170mm		40mm	
32051225	22.5 x 8.25		4.75			50277	17 x 7.5J	8H - 170mm		40mm	
32051245	24.5 x 8.25		4.75			50307	22.5 x 8.25	10H - 285.75mm	6.60		51487
32052225	22.5 x 9.00		5.00			50308	22.5 x 8.25	10H - 285.75mm	6.60		51408
40000	22.5 x 8.25	10H - 285.75mm	6.59			50352	24 x 8.5	10H - 335mm	6.89		
40002	22.5 x 8.25	10H - 285.75mm	6.59			50379	24.5 x 8.25	10H - 285.75mm	6.59		50409
40004	22.5 x 8.25					50381	24.5 x 8.25	10H - 285.75mm	6.59		50641
40006	22.5 x 8.25					50408	22.5 x 8.25	10H - 285.75mm	6.60		51408
40010	24.5 x 8.25	10H - 335mm	6.79			50475	22.5 x 8.25	10H - 285.75mm		2.19	
40012	22.5 x 9.00	10H - 285.75mm	3.12		41012	50487	22.5 x 8.25	10H - 285.75mm	6.60		51487
40016	22.5 x 14.00	10H - 285.75mm	0.5		43140						
40020	22.5 x 8.25	10H - 285.75mm	6.59		42644						
40036	22.5 x 13.00	10H - 285.75mm		2.38							
40048	20 x 10.00	10H - 335mm									
40082	20 x 10.00	10H - 335mm									
40124	22.5 x 8.25	10H - 285.75	6.59		42644						
40164	22.5 x 11.75	10H - 335mm	120mm	148mm							
40166	22.5 x 11.75	10H - 335mm		25mm							
40168	16 x 7.00	8H - 6.50"	0.25								
40169	17.5 x 6.75	8H - 6.50"	0.83								
40170	17.5 x 6.75	10H - 8.75"	5.55								
40176	22.5 x 11.75	10H - 335mm	120mm	148mm							
40178	22.5 x 11.75	10H - 335mm		25mm							
40386	22.5 x 11.75	10H - 335mm	135mm	161mm							
40394	22.5 x 11.75	10H - 335mm	135mm	161mm							
40470	22.5 x 8.25	10H - 225mm		2.40							
41016	22.5 x 14.00	10H - 285.75mm	0.50		43140						

<sup>(1)</sup> Outset/Inset—(Inches) See Pg. 40 or Pg. 48 for definition

<sup>(2)</sup> Check vehicle clearances prior to mounting tire.

<sup>(3)</sup> Tubeless wheel/rim available. See catalog.

<sup>(4)</sup> Well Welded—check clearance I.D. upon replacement.

<sup>(5)</sup> Reinforced Flanges.

<sup>(6)</sup> Replacement wheel has a different disc contour which allows less clearance for brakes. Check clearance before ordering.

<sup>(7)</sup> Check clearance.

<sup>(8)</sup> This wheel has a .453" valve hole. Wheels supplied on original vehicle have a .625" valve hole.

## RIM/WHEEL GLOSSARY

**APPROVED RIM WIDTH** - Rim width sizes approved by The Tire & Rim Association for use with the tire.

**BALANCED WHEEL** - A wheel that is within 30 inch-ounces of balance.

**BEAD SEAT** - Surface of a rim that contacts the tire bead. The bead seat angle is usually 5° for tube-type tires and 15° for tubeless tires.

**BOLT CIRCLE** - The diameter of the circle which traces through the centerline of the bolt holes. It defines the bolt hole spacing around the disc in a wheel.

**BOLT HOLES** - The holes in the disc of a wheel through which the bolts or the studs pass. For stud-piloted wheels, the bolt holes are chamfered and used to center the wheels.

**BORE** - The center hole (pilot) of the wheel. With hub mount wheels, it is used to center the wheel.

**BUTT WELD** - Transverse weld in a rim.

**CAPACITY** - Demountable rim or disc wheel maximum carrying load. Expressed in load (lbs) and inflation pressure (psi) cold.

**DESIGN RIM WIDTH** - Nominal rim width. Rim width on which a tire performs best. Approximately 75 percent as wide as the tire width designation.

**DEMOUNTABLE RIM** - A rim with valve locaters which is used with a cast spoke wheel to provide the method of attaching tires to the vehicle.

**DISC WHEEL** - A permanent assembly of a disc and a rim.

**DOUBLE CAP NUT** - The inner and outer nuts used to secure stud-piloted wheels to a vehicle. The inner dual wheel is attached by an inner cap nut with a spherical radius and the outer dual wheel is attached by an outer cap nut with a spherical radius.

**DUAL SPACING** - Lateral distance from wheel centerline to wheel centerline in a dual wheel arrangement. It is determined by adding two offsets (disc wheels) or two offsets plus one spacer band width (demountable rims).

**HALF DUAL SPACING** - See "Wheel Offset."

**HAND HOLE** - Opening in the disc area of a wheel for the purpose of valve stem access to inside dual tire and chain application.

**HUB-PILOTED WHEEL** - Wheels that are designed to center on the hub at the bore of the wheel. These wheels generally have straight through bolt holes, since the bolt holes only supply clearance for the stud. Hub-piloted wheels are used with two piece flange nuts.

**INSET** - The lateral distance from the rim centerline to the mounting surface of the disc. Inset places the rim center line inboard of the mounting surface.

**LOCK RING** - Third piece of a 3-piece rim assembly which locks the side ring to the rim base.

**LONG SIDE** - The side of the rim which has a ledge.

**MINIMUM DUAL SPACING** - The minimum allowable distance between the wheel centerlines in a dual arrangement.

**MULTI-PIECE RIM** - A rim consisting of more than one part. Usually two pieces (rim base and side ring), or three pieces (rim base, side ring, and lock ring).

**OFFSET** - See "Rim Offset" or "Wheel Offset."

**OUTSET** - The lateral distance from the rim centerline to the mounting surface of the disc. Outset places the rim centerline outboard of the hub surface.

**RIM (also see demountable rim)** - The item that supports the tire. It may consist of one piece (tubeless drop center type) or two or three piece (tube-type).

**RIM BASE** - The major piece of a multi-piece rim assembly. It supports the tire bead on one side, provides a locking mechanism for the side ring or lock ring, and provides a bevel surface for attaching to a spoke wheel.

**RIM OFFSET** - The lateral distance from the rim surface that contacts the spacer band to the rim centerline.

**SHORT SIDE** - The side of the rim which does not have a ledge.

**SIDE RING** - A removable piece of a multi-piece rim assembly which provides lateral support for one tire bead.

**SPACER BAND** - Band of steel which separates two demountable rims on spoke wheels (also called "spacers").

**SPOKE WHEEL** - A casting with 3, 5, or 6 spokes that attaches to the axle and provides a means of attaching a demountable rim to a vehicle. Also called "Cast Spoke Wheel."

**STUD-PILOTED WHEELS** - Wheels that are designed to center on the studs of a hub. These wheels have chamfers at the bolt holes into which a ball seat or conical nut is installed to center the wheel. The center bore of the wheel is only for clearance of the axle end.

**SUPER SINGLE** - Duplex® or wide base.

**TWO-PIECE FLANGE NUT** - A nut attached to a washer that is used to secure hub-piloted wheels to a vehicle.

**VALVE HOLE** - The hole in the rim into which a valve is installed to inflate or deflate the tire/rim assembly.

**VALVE LOCATERS** - The guides located on either side of the demountable rim valve slot or valve hole to properly locate the tire valve between spokes. Sometimes called "drivers," "rim drivers," "locating lugs," etc.; they are either indented or welded on.

**VALVE SLOT** - Opening in a tube-type rim to receive the tire tube valve stem.

**VENT HOLE** - Opening in the disc area of a wheel for the purpose of air ventilation.

**WHEEL** - See "Spoke Wheel" or "Disc Wheel."

**WHEEL OFFSET** - The lateral distance from the disc mating surface (surface between the wheels as a dual assembly) to the rim centerline (disc wheel - see page 37).



**Accuride Corporate Headquarters**

38777 Six Mile Road  
Suite 410  
Livonia, MI 48152  
(812) 962-5000, (800) 626-7096

**Accuride Evansville**

7140 Office Circle  
Suite 200  
Evansville, IN 47715  
(812) 962-5000, (800) 626-7096

**Customer Service Department**

Place an order, check existing orders,  
inquire about price, availability,  
and delivery.  
(800) 626-7096  
customerservice@accuridecorp.com

**Sales**

(800) 626-7096  
sales@accuridecorp.com

**International Sales**

(812) 962-5000  
internationalsales@accuridecorp.com

**Field Engineering**

For technical and warranty information  
(800) 869-2275  
fieldservice@accuridecorp.com

**AOT (Assemblies On Time)**

4800 Gateway Boulevard  
Springfield, OH 45502  
(937) 323-9669

**Accuride Erie**

1015 East 12th Street  
Erie, PA 16503  
(814) 480-6400

**Accuride Henderson**

2315 Adams Lane  
Henderson, KY 42420  
(270) 826-5000, (800) 626-7096

**Accuride de Mexico**

Ave. Norte America No 301  
Parque Industrial Las Americas  
Autopista Monterrey-Laredo Km 31.5  
Cienega de Flores, N.L. 65550  
(011) 5281-8158-8800

**Accuride Assemblies de Mexico**

Avenida Internacional #130  
Parque Industrial Vynmsa Escobedo  
Escobedo, NL 66062  
(52)-(81)-8158-8800 ext 8609

**Accuride Canada Inc. and Distribution Center**

31 Firestone Boulevard  
London, Ontario N5W 6E6 Canada  
(519) 453-0880, (800) 399-0880





**Your single source for industry-leading wheel end solutions.**

STEEL & ALUMINUM WHEELS | DRUMS | HUBS | ROTORS | SLACK ADJUSTERS

For more information or to place an order: **(800) 823-8332 | [accuridecorp.com](https://www.accuridecorp.com)**

Accuride | 38777 Six Mile Road, Suite 410 | Livonia, MI 48152 USA

