

# 2021 Site Environmental Report

VOLUME 1





The cover for this year's 2021 Site Environmental Report recounts the removal of the High Flux Beam Reactor (HFBR) Stack. The Stack served as an exhaust for the Brookhaven Research Reactor (BGRR), from 1950 to 1968 and for the HFBR from 1965 to 1999. Historical operations from both facilities resulted in radiological contamination of the interior of the Stack. Under the direction of the Department of Energy (DOE), the U.S. Army Corps of Engineers oversaw the demolition and decommissioning of the HFBR Stack at BNL. Olgoonik-FPM Joint Venture was contracted to plan the work, safely dismantle the HFBR Stack, and properly dispose of all waste.

The HFBR Stack demolition involved significant challenges such as ensuring careful demolition, transport, and disposal of contaminated materials, as well as creating little to no vibrations that could affect extremely high-value, sensitive research equipment located nearby on the Lab site. Despite these challenges, the demolition was performed safely and was completed in February 2021, followed by soil and below ground structure removal and a final status survey.

The photo story of this complex project begins on the back cover of this year's SER and shows the Stack just before the demolition project started, then wraps around to the front cover showing the green field at the completion of the project. The photos in the honeycomb follow the progression of demolition starting with paint removal which abated lead and asbestos, to placement of

the MANTIS™ system which was used to remove roughly 4'x4' sections of the stack, to the final disposition, represented by the flower, of the green field.

The photo below represents the Stack's use for both the BGRR (tan building to the left of the Stack) and the HFBR (domed structure to the right of the stack). The stack was first used with the BGRR. The BGRR was the first peace-time reactor constructed after World War II specifically for the purpose of peaceful study of nuclear physics. It was modelled after the X-10 Reactor located at Oakridge National Laboratory in Tennessee. Construction started in 1948 with operation commencing in 1950. The BGRR operated until June 10, 1968.

By 1958, scientists realized that the neutrons generated within the nuclear reactions of the BGRR were not readily available for many of the research aspects they were conducting. They therefore began to design a reactor that would produce a neutron flux that would be concentrated and available on the outer fringes of the nuclear reactor. The development was a first of its kind, using a water-moderated and cooled reactor specifically designed for nuclear research. Construction of the HFBR began in 1960 and the reactor came online in 1965. As noted above, the Stack served both reactors, concurrently from 1965 to 1968. The HFBR operated from 1965 to 1997 and was permanently shut down by the DOE in December 1999. The HFBR internals were removed, and the vessel now sits allowing decay of the activated vessel until it can safely be removed sometime in the future.

---

The Brookhaven National Laboratory Site Environmental Report is a public document that is distributed to various U.S. Department of Energy sites, local libraries, and local regulators and stakeholders. The report is available to the general public on the internet at <http://www.bnl.gov/ewms/ser/>. To obtain a copy of the report, please write or call:

Brookhaven National Laboratory  
Environmental Protection Division  
Attention: SER Project Coordinator  
Building 860  
P.O. Box 5000  
Upton, NY 11973-5000  
(631) 344-4056





Environmental Protection Division  
Attention: SER Project Coordinator  
Building 860  
P.O. Box 5000  
Upton, NY 11973-5000

[www.bnl.gov](http://www.bnl.gov)



# 2021

## SITE ENVIRONMENTAL REPORT

BROOKHAVEN NATIONAL LABORATORY

Volume I

**October 2022**

Prepared by  
Brookhaven Science Associates, LLC  
For the U.S. Department of Energy  
Under Contract No. DE-SC0012704

Brookhaven National Laboratory  
Brookhaven Science Associates, LLC  
P.O. Box 5000  
Upton, NY 11973-5000





The text of this book has been copied on 100% post-consumer recycled paper, a move that saves approximately 20 trees compared to using its virgin equivalent.



PRINTED ON RECYCLED PAPER

#### **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe on privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency, contractor, or subcontractor thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency, contractor, or subcontractor thereof.

Printed in the United States of America  
Available from  
National Technical Information Service  
U.S. Department of Commerce  
5285 Port Royal Road  
Springfield, VA 22161

## Executive Summary

Brookhaven National Laboratory (BNL) is managed on behalf of the Department of Energy (DOE) by Brookhaven Science Associates (BSA), a partnership between the Research Foundation for the State University of New York on behalf of Stony Brook University and Battelle. For over 70 years, the Laboratory has played a lead role in the DOE Science and Technology mission and continues to contribute to the DOE's missions in energy resources, environmental quality, and national security. BNL manages its world-class scientific research with particular sensitivity to environmental issues and community concerns. The Laboratory's Environmental, Safety, Security, and Health (ESSH) Policy reflects the commitment of BNL's management to fully integrate environmental stewardship into all facets of its mission and operations.

BNL prepares an annual Site Environmental Report (SER) in accordance with DOE Order 231.1B, Environment, Safety, and Health Reporting. The report is written to inform the public, regulators, employees, and other stakeholders of the Laboratory's environmental performance during the calendar year in review. Volume I of the SER summarizes environmental data; environmental management performance; compliance with applicable DOE, federal, state, and local regulations; and performance in restoration and surveillance monitoring programs. BNL has prepared annual SERs since 1971 and has documented nearly all its environmental history since the Laboratory's inception in 1947.

Volume II of the SER, the Groundwater Status Report, is also prepared annually to report on the status of groundwater protection and restoration efforts. Volume II includes detailed technical summaries of groundwater data and treatment system operations and is intended for regulators and other technically oriented stakeholders. A summary of the information contained in Volume II is included in Chapter 7, Groundwater Protection, of this volume.

Both reports are available in print and as downloadable files on the BNL web page at <https://www.bnl.gov/esh/env/ser/>.

---

### ENVIRONMENTAL MANAGEMENT SYSTEM

The Laboratory's Integrated Safety Management System (ISMS) incorporates management of environment (i.e., environmental protection and pollution prevention), safety, and health (ES&H) issues into all work planning. BNL's ISMS ensures that the Laboratory integrates DOE's five Core Functions and seven Guiding Principles into all work processes. These processes contributed to BNL's achievement of registration under the International Organization for Standardization (ISO) 14001 Standard for Environmental Management Systems (EMS). The standard requires an organization to develop a policy, create plans to implement the policy, implement the plans, check progress and take correction actions, and review the system periodically to ensure its

continuing suitability, adequacy, and effectiveness.

An EMS was fully established at BNL in 2001 to ensure that environmental issues are systematically identified, controlled, and monitored. The EMS also provides mechanisms for responding to changing environmental conditions and requirements, reporting on environmental performance, and reinforcing continual environmental improvement. The cornerstone of the Laboratory's EMS is the ESSH Policy. The policy makes clear the Laboratory's commitment to environmental stewardship, the safety and health of its employees, and the security of the site. Specific environmental commitments in the policy include compliance, pollution prevention, conservation, community outreach, and continual improvement. The policy is posted throughout the Laboratory and on the BNL website. It is also



included in all training programs for new employees, guests, and contractors.

The Laboratory's EMS was designed to meet the rigorous requirements of the globally recognized ISO 14001 Standard for Environmental Management Systems. BNL was the first DOE Office of Science Laboratory to become officially registered to this standard. The Laboratory achieves certification to the standard by undergoing annual audits by an accredited third-party registrar who assures that the Lab's EMS is maintained and continually improved. In 2021, BNL's registrar recertified the Lab to the ISO 14001 Standard.

Executive Order (EO) 13834, Efficient Federal Operations, was partially revoked by EO 13990, Protecting Public Health and the Environment and Restoring Science to Tackle the Climate Crisis, on January 20, 2021, eliminating federal sustainability requirements for Federal agencies. Then, it was fully revoked by EO 14057, Catalyzing Clean Energy Industries and Jobs Through Federal Sustainability, on December 8, 2021. Therefore, BNL follows DOE sustainability goals put forth in the DOE 2020 Sustainability Report and Implementation Plan during this transitional time.

DOE's plan establishes sustainability goals for federal agencies with a focus on sustainability initiatives that save money and increase efficiency across the government with guidance, recommendations, plans, and numerical targets. DOE Order 436.1, Departmental Sustainability, provides requirements and responsibilities for managing sustainability within DOE to ensure facilities are working towards sustainability goals established in its Strategic Sustainability Performance Plan (SSPP). Each DOE facility is required to have a Site Sustainability Plan (SSP) in place detailing the strategy for achieving these long-term goals and due dates and to provide an annual status. The requirements influence the future of the Laboratory's EMS program and have been incorporated into BNL's SSP. For a status summary of BNL's 2021 SSP, see Appendix E.

The Laboratory's Pollution Prevention (P2) Program is an essential element for the successful implementation of BNL's EMS. The P2 Program reflects the national and DOE pollution prevention goals and policies and represents an ongoing effort to make pollution prevention and waste minimization an integral part of the Laboratory's operating

philosophy. Pollution prevention and waste reduction goals have been incorporated as performance measures into the DOE contract with BSA and BNL's ESSH Policy. The overall goal of the P2 Program is to create a systems approach that integrates pollution prevention and waste minimization, resource conservation, recycling, and affirmative procurement into all planning and decision making. The implementation of pollution prevention opportunities, recycling programs, and conservation initiatives continues to reduce both waste volumes and management costs. In 2021, these efforts resulted in nearly \$1.5 million in cost avoidance or savings and approximately 2.8 million pounds of materials being reduced, recycled, or reused annually.

BNL continues to decrease its energy consumption and increase savings. In the past ten years, water consumption total was approximately half the 1999 total—a reduction of nearly a half billion gallons per year. In 2021, natural gas was used to meet over 99 percent of the heating and cooling needs of the Laboratory's major facilities, further reducing greenhouse (GHG) emissions. The Laboratory also scheduled operations at the Relativistic Heavy Ion Collider to avoid peak demand periods. This reduced the electric demand by approximately 25 megawatts (MW), saving approximately \$1.4 million in electric demand costs. BNL also maintains a contract with the New York Power Authority that resulted in an overall cost avoidance of \$26.5 million for 2021. In 2021, BNL's energy supply included 120 million kWh of clean, renewable hydropower energy, 1.0 million kWh of on-site generated solar photovoltaic (PV), and 24 million kWh of purchased renewable energy certificates (REC). In addition, the 2021 output from the Lab's Long Island Solar Farm (LISF) was 48.9 million kWh and resulted in an avoidance of approximately 27,055 tons of carbon. Chapter 2 of this report further describes these and other sustainability efforts, as well as implementation of BNL's EMS and P2 Program, in more detail.

## **BNL'S ENVIRONMENTAL MANAGEMENT PROGRAM**

BNL's Environmental Management Program consists of several Laboratory-wide and facility-specific environmental monitoring and surveillance programs. These programs identify potential pathways of public and environmental exposure and

evaluate the impacts BNL activities may have on the environment. An overview of the Laboratory's environmental programs and a summary of performance for 2021 are provided below.

### **COMPLIANCE MONITORING PROGRAM**

BNL has an extensive program in place to ensure compliance with all applicable regulatory and permit requirements. The Laboratory must comply with more than 100 sets of federal, state, and local environmental regulations; numerous sitespecific permits; nine equivalency permits for the operation of groundwater remediation systems; and several other binding agreements.

In 2021, the Laboratory operated in compliance with most of the requirements, and any instance of noncompliance was reported to regulatory agencies and corrected expeditiously or a plan was put in place to come into compliance. Emissions of nitrogen oxides, carbon monoxide, volatile organic compounds, total suspended particulates, and sulfur dioxide from the Central Steam Facility (CSF) were well within permit limits in 2021. Recorded excess opacity measurements from CSF boilers were investigated and documented in quarterly Site-Wide Air Emissions and Monitoring Systems Performance Reports submitted to the New York State Department of Environmental Conservation (NYSDEC).

There were no discharges of Halon 1211 from portable fire extinguishers or Halon 1301 from accidental or fire-induced activation of fixed fire suppression systems in 2021. Halon-portable fire extinguishers continue to be removed and replaced by dry-chemical or clean agent units as part of an ongoing program to phase out the use of chlorofluorocarbons as extinguishing agents to eliminate possible ozone-depleting substance emissions.

BNL's drinking water and the supply and distribution system were in compliance with all applicable county, state, and federal regulations regarding drinking water quality, monitoring, operations, and reporting in 2021. Most of the liquid effluents discharged to surface water and groundwater also met applicable New York State Pollutant Discharge Elimination System (SPDES) permit requirements.

BNL received a Notice of Violation for continuing violation of the permit limit for Tolytriazole (TTA). A formal noncompliance report which included a corrective action plan was submitted to

NYSDEC in September. This corrective action plan included background information on the issue, a description of all non-compliances, causes of TTA exceedances, immediate and preventative (long-term) corrective actions taken, and any proposed future actions.

Groundwater monitoring at the Laboratory's Major Petroleum Facility continued to demonstrate that current oil storage and transfer operations are not affecting groundwater quality. Efforts to implement release prevention measures and minimize impacts of spills of materials continued in 2021. There were ten spills in 2021 and three of those spills met regulatory agency reporting criteria.

In 2021, due to the pandemic, inspections by federal, state, or local regulators were limited. BNL was inspected on nine occasions. These inspections included Clean Air Act compliance, Sewage Treatment Plant operations, hazardous waste management facilities, underground storage tank management, and the potable water system. Immediate corrective actions were taken to address all compliance issues raised during these inspections.

The DOE Brookhaven Site Office (BHSO) performs routine inspections, assessments, and surveillances of BNL operations to ensure continual improvement and success in meeting the Laboratory's mission. In 2021, BHSO performed an assessment of BNL's Wildland Fire Management Program and a surveillance of a Waste Management procedure titled, WM-SOP-581, Rev. 1 High Dose MIRP Transfer. Identified opportunities for improvement are being reviewed and analyzed and will be addressed, as appropriate, to improve programs.

Chapter 3 of this report describes BNL's Compliance Program and status in further detail.

### **AIR QUALITY PROGRAM**

BNL monitors radioactive emissions at three facilities to ensure compliance with the requirements of the Clean Air Act. Environmental Protection Agency (EPA) regulations require continuous monitoring of all sources that have the potential to deliver an annual radiation dose greater than 0.1 mrem to a member of the public; all other facilities capable of delivering any radiation dose require periodic confirmatory sampling.



During 2021, BNL facilities released a total of 11,054 curies of short-lived radioactive gases. Oxygen-15 and Carbon-11 emitted from the Brookhaven Linac Isotope Producer (BLIP) constituted more than 99.9 percent of the site's radiological air emissions.

Because natural gas prices were comparatively lower than residual fuel oil prices throughout the year, BNL's Central Steam Facility (CSF) used natural gas to meet 98.9 percent of the heating and cooling needs of the Laboratory's major facilities in 2021. As a result, emissions of particulates, oxides of nitrogen, sulfur dioxide, and volatile organic compounds were well below the respective regulatory permit criteria pollutant limits.

In 2021, there were seven recorded excess opacity measurements. Two recorded readings for Boiler 6 on February 17 were due to a load shift and a single Boiler 6 excess opacity reading on March 28 was due to unusually heavy rainfall that obstructed the transmission of light in the Boiler 6 continuous opacity monitor. Two Boiler 7 excess opacity readings on March 15 were due to contractor maintenance of the opacity monitor, while two Boiler 7 excess opacity readings on June 22 occurred during start-up/shutdown of the boiler while firing #6 oil in preparation for National Grid utility maintenance of the natural gas supply system. While there are no regulatory requirements to continuously monitor opacity for Boilers 1A and 5, surveillance monitoring of visible stack emissions is a condition of BNL's Title V operating permit. Daily observations of stack gases recorded by CSF personnel throughout the year showed no visible emissions on days when the boilers were operated.

The Laboratory conducts ambient radiological air monitoring to verify local air quality and to assess possible environmental and health impacts from BNL operations. Samples collected from air monitoring stations around the perimeter of the site were analyzed for gross alpha and beta airborne activity. The annual average gross alpha and beta airborne activity levels for the four monitoring stations were 0.0012 and 0.0126 pCi/m<sup>3</sup>, respectively. The results for these locations are typical for the site and show seasonal variation in activity within a range that is representative of natural background levels.

BNL has two active facilities: the BLIP, whose emissions are continuously monitored with an inline detection system, and the Target Processing Laboratory (TPL), which has a particulate filter sampling system to continuously collect samples for gross alpha and gross beta activity, and one inactive facility, the High Flux Beam Reactor (HFBR), where periodic emissions monitoring is conducted. The average gross alpha and beta airborne activity concentration levels for samples collected from the BLIP exhaust stack were 0.0004 and 0.0067 pCi/m<sup>3</sup>, respectively. Annual average gross alpha and beta airborne activity concentration levels for samples collected from the TPL were 0.0009 and 0.0096 pCi/m<sup>3</sup>, respectively.

Airborne tritium in the form of tritiated water (HTO) is monitored throughout the BNL site. In 2021, samples were collected from Stations P2, P4, P7, and P9 to assess the potential impacts from the Laboratory's two tritium sources. The average tritium concentrations at all the sampling locations were less than the typical minimum detection limits, ranging from 4.4 to 14.5 pCi/m<sup>3</sup>.

BNL has taken several actions to meet DOE GHG reduction goals. In 2021, the LISF provided 48.9 million kilowatt-hours of solar energy to Long Island. This equates to 27,055 metric tons CO<sub>2</sub> equivalents (MT CO<sub>2</sub>e) GHG offset or reduction. In 2021, BNL consumed 120,593 megawatts of hydropower, providing a net combined GHG reduction of 93,728 MT CO<sub>2</sub>e from the LISF and hydropower. Furthermore, in 2016 BNL completed an expansion of the Northeast Solar Energy Research Center (NSERC). The NSERC is a solar photovoltaic facility that now has a total peak capacity of 907 kW. In 2021, it provided 659,336 kWh and offset 365 MT CO<sub>2</sub>e.

Chapter 4 of this report describes BNL's Air Quality Program, monitoring data, and other GHG reduction efforts in further detail.

## **WATER QUALITY SURVEILLANCE PROGRAM**

Wastewater generated from BNL operations is treated at the STP before it is discharged to nearby groundwater recharge basins. Some wastewaters may contain very low levels of radiological, organic, or inorganic contaminants. Monitoring, pollution prevention, and vigilant operation of treatment facilities

ensure that these discharges comply with all applicable regulatory requirements and that the public, employees, and the environment are protected.

Analytical data for 2021 shows that the average gross alpha and beta activity levels in the STP discharge (EA, Outfall 001) were within the typical range of historical levels and were well below New York State Drinking Water Standards (NYS DWS). Tritium was detected just above the method detection limit (MDL) in the STP discharge during December 2021; no cesium-137, strontium-90, or other gamma-emitting nuclides attributable to Laboratory operations were detected. Non-radiological monitoring of the STP effluent showed that all organic and inorganic parameters were within SPDES effluent limits or other applicable standards.

Stormwater and cooling water discharges to recharge basins are sampled throughout the year and analyzed for gross alpha and beta activity, gamma-emitting radionuclides, and tritium. Each recharge basin is a permitted point-source discharge under the Laboratory's SPDES permit. The average concentrations of gross alpha and beta activity in stormwater and cooling water discharged to recharge basins were within typical ranges and no gamma-emitting radionuclides were detected. Disinfection byproducts continue to be detected at low concentrations, above the method detection limit, in discharges to recharge basins due to the use of chlorine and bromine for the control of algae and bacteria in potable and cooling water systems. Inorganics (i.e., metals) were detected; however, their presence is due primarily to sediment runoff in stormwater discharges.

The Peconic River did not flow offsite in 2021. Radiological data from Peconic River surface water sampling show that the average concentrations of gross alpha and gross beta activity from on-site locations were indistinguishable from control locations, and all detected levels were below the applicable NYS DWS. No gamma-emitting radionuclides attributable to Laboratory operations were detected either upstream or downstream of the STP area, and tritium was not detected above method detection limits in any of the surface water samples.

Chapter 5 of this report describes BNL's Water Quality Surveillance Program and monitoring data in further detail.

## NATURAL AND CULTURAL RESOURCE MANAGEMENT PROGRAM

The BNL Natural Resource Management Program was designed to promote stewardship of the natural resources found on site and to integrate natural resource management and protection with the Laboratory's scientific mission. The program includes protecting and monitoring the ecosystem on site, conducting research, and communicating the results with the public, stakeholders, and staff members. BNL conducts routine monitoring of flora and fauna to assess the impact, if any, of past and present activities on the Laboratory's natural resources.

To evaluate Cs-137 in deer, BNL has established a routine on and off-site deer sampling program. In 2021, 19 deer were obtained from both on and off the BNL site. The 2021 average is approximately seven times the 2020 value of 0.06 pCi/g, wet weight, but is lower than the ten-year average. The higher averages shown are reflective of a significant number of samples taken in the fall when Cs-137 levels are typically higher. However, these sample results continue to indicate the effectiveness of cleanup actions across the Laboratory, with levels trending downward from 2012 to 2021 and the ten-year average being 0.49 pCi/g. The New York State Department of Health (NYSDOH) has formally considered the potential public health risks associated with elevated Cs-137 levels in onsite deer and determined that neither hunting restrictions nor formal health advisories are warranted (NYSDOH 1999).

High deer populations are a regional problem, and the Laboratory is just one area on Long Island with such an issue. Normally, a population density of ten to 30 deer per square mile is considered an optimum sustainable level for a given area. This would equate to approximately 80 to 250 deer inhabiting the BNL property under optimal circumstances. At the end of 2020, the herd was estimated at 425 animals; a harvest was planned between February and April 2021 and 81 deer were removed from the population. With a reproduction rate of approximately 60 percent and mortalities from epizootic hemorrhagic disease, the population at the end of 2021 was estimated at 400 deer.

During 2021, grassy vegetation samples were collected from ten locations around the Laboratory



and a control location in Ridge, New York. All samples were analyzed for Cs-137. All vegetation samples were non-detect for Cs-137. Soil samples had Cs-137 levels ranging from nondetect to 0.27 pCi/g, dry weight. All values were consistent with historic monitoring. Monitoring results for grassy vegetation and soils were utilized for the annual dose to biota analysis reported in Chapter 8.

Mercury concentrations in precipitation have been measured at BNL since 2007. Analysis of mercury in precipitation is conducted to document mercury deposition that is attributable to off-site sources. This information is compared to Peconic River monitoring data and aids in understanding the distribution of mercury within the Peconic River watershed. During 2021, precipitation samples were collected quarterly at two air monitoring stations. Mercury was detected in all the precipitation samples collected at both stations. Mercury ranged from 2.52 ng/L at station P4 in January 2021 to 15.3 ng/L at station S5 in July 2021. The 15.3 ng/L concentration is three times lower than the highest value of 45.1 ng/L, recorded in 2017.

The Laboratory sponsors a variety of educational and outreach activities involving natural resources. These programs are designed to help participants understand the ecosystem and to foster interest in science. Wildlife programs are conducted at BNL in collaboration with local agencies, colleges, and high schools. Ecological research is also conducted on site to update the current natural resource inventory, gain a better understanding of the ecosystem, and guide management planning.

In 2021, due to COVID-19 restrictions, BNL internships were required to be conducted virtually. Due to the nature of the natural resources program, the Environmental Protection Division hosted one intern during the summer of 2021 who worked on statistical analysis of data associated with the 4-Poster™ project for tick management.

Also in 2021, BNL continued its active support of ecological education programs by hosting the Day in the Life of a River program which ran from September 24 to November 5, 2021. The Day in the Life of a River Program is a place-based educational experience where students and teachers collaborate with environmental professionals to collect scientific information capturing a snapshot of the health of the Long Island rivers and creeks.

The Day in the Life of a River is a collaboration between the Central Pine Barrens Commission, the NYSDEC, and BNL.

The BNL Cultural Resource Management Program ensures that the Laboratory fully complies with numerous cultural resource regulations. In 2019, the Laboratory contracted with Hartgen Archeological Associates to conduct historical architectural reviews of buildings that had recently reached 50 years of age. The Lab submitted these reports to the New York State Historic Preservation Office in 2021 and received concurrence of its findings.

Also in 2021, the Cultural Resource Management Program worked with the Laboratory Graphic Arts team to establish a project to catalog and evaluate all of the video tapes held by Graphic Arts. The videos were evaluated, prioritized, and contract established with Puddle Drop Media to digitize those videos of highest historic value. The contract resulted in a total of 1,448 videos being digitized. The digitized videos are now more accessible for use in video production and historical study.

Chapter 6 of this report describes BNL's natural and cultural resources in further detail.

## **GROUNDWATER PROTECTION MANAGEMENT PROGRAM**

BNL has made significant investments in environmental protection programs for more than 25 years and continues to make progress in achieving its goal of preventing new groundwater impacts and remediating previously contaminated groundwater. The Laboratory's extensive groundwater monitoring well network is used to evaluate progress in restoring groundwater quality, comply with regulatory permit requirements, and monitor active research and support facilities where there is a potential for environmental impact.

Due to the detection of Per and Polyfluoroalkyl Substances (PFAS) in water samples collected from three BNL water supply wells in 2017, BNL conducted a search of available records to determine a source of PFAS. In 2018, BNL identified eight areas where PFAS-containing firefighting foam had been used for firefighter training or fire suppression system maintenance from 1966 until 2008. During 2021, BNL identified a ninth PFAS source area near dormitory Building 170, which had been used for firefighter training. In all nine

foam release areas, perfluorooctane sulfonate (PFOS) and perfluorooctanoic acid (PFOA) concentrations were found to exceed the 10 ng/L drinking water standards that were adopted for these chemicals by New York State in August 2020. During 2021, BNL began the construction of two groundwater treatment systems that will be used to remediate high concentration PFAS plumes originating from the Laboratory's former firehouse (in operation from 1947-1985) and current firehouse facilities. It is anticipated that construction of the treatment systems will be completed by Fall 2022.

BNL implements aggressive pollution prevention measures to protect groundwater resources and uses an extensive groundwater monitoring well network to verify that prevention and restoration activities are effective. During 2021, BNL collected groundwater samples from 580 permanent monitoring wells and 70 temporary wells. Seven groundwater remediation systems removed 58 pounds of volatile organic compounds (VOCs) and returned approximately one billion gallons of treated water to the Upper Glacial aquifer. Since the beginning of active groundwater remediation in December 1996, the treatment systems have removed 7,758 pounds of VOCs by treating almost 30 billion gallons of groundwater. Also, one groundwater treatment system removed approximately 0.3 millicurie of strontium-90 (Sr-90) while remediating approximately 14 million gallons of groundwater. Since 2003, BNL has removed approximately 34 millicuries of Sr-90 from the groundwater while remediating approximately 274 million gallons of groundwater. As a result of the successful operation of these treatment systems, significant reductions in contaminant concentrations have occurred in on- and off-site areas.

Chapter 7 of this report provides an overview of this program, and the SER Volume II, Groundwater Status Report, provides detailed descriptions, data, and maps relating to all groundwater monitoring and remediation performed in 2021.

## **RADIOLOGICAL DOSE ASSESSMENT PROGRAM**

The Laboratory routinely reviews its operations to ensure that any potential radiological dose to members of the public, workers, and the

environment is "As Low As Reasonably Achievable" (ALARA). The potential radiological dose to members of the public is calculated at an off-site location closest to an emission source as the maximum dose that could be received by an offsite individual, defined as the "maximally exposed off-site individual" (MEOSI). The dose to the MEOSI is the sum total from direct and indirect dose pathways via air immersion, inhalation of particulates and gases, and ingestion of local fish and deer meat.

In 2021, the total effective dose (TED) to the MEOSI of 3.61 mrem (36.1  $\mu$ Sv) from Laboratory operations was well below the dose limit of 100 mrem required by DOE Order 458.1, as well as all other EPA and DOE regulatory dose limits for the public, workers, and the environment.

In general, the radiological footprint at BNL continues to slowly grow, with a recent dose peak in 2018, as testing for Ac-225 production occurred. The ambient dose increased slightly in 2021 as testing for that production process resumed.

Dose to the maximally exposed individual (MEI) on site and outside of controlled areas, calculated from thermo-luminescent dosimeter (TLD) monitoring records, was 7 mrem above natural background radiation levels, also well below the 100-mrem DOE limit on dose. The average annual external dose from ambient sources on site was  $68 \pm 11$  mrem ( $680 \pm 110$   $\mu$ Sv), while the dose from off-site ambient sources was  $68 \pm 11$  mrem ( $680 \pm 110$   $\mu$ Sv). Both on- and off-site external dose measurements include the contribution from natural terrestrial and cosmic background radiation. A statistical comparison of the average doses measured using 50 on-site TLDs and 17 off-site TLDs showed that there was no external dose contribution from BNL operations distinguishable from the natural background radiation level. Additional TLDs were used to measure on-site areas known to receive radiation dose slightly above the natural background radiation.

Dose to aquatic and terrestrial biota were also evaluated and found to be well below DOE regulatory limits. In summary, the overall dose impact from all Laboratory activities in 2021 was comparable to that of natural background radiation levels.

Chapter 8 of this report describes the BNL Radiological Dose Assessment Program and monitoring data in further detail.

## QUALITY ASSURANCE PROGRAM

The multi-layered components of the BNL Quality Assurance (QA) Program ensure that all analytical data reported in this report are reliable and of high quality and meet quality assurance and quality control objectives. Samples are collected and analyzed in accordance with EPA methods and BNL standard operating procedures that are designed to ensure samples are representative and the resulting data are reliable and defensible. Quality control in the analytical laboratories is maintained through daily instrument calibrations, efficiency and background checks, and testing for precision and accuracy. Data are verified and validated as required by project-specific quality objectives before being used to support decision making.

In 2021, environmental samples were analyzed by six contract analytical laboratories. All samples were analyzed according to EPA-approved methods or by standard industry methods where no EPA methods are available (e.g., for tolyltriazole). In addition, field sampling technicians performed field monitoring for parameters such as conductivity, dissolved oxygen, pH, temperature, and turbidity. In 2021, procedures for calibrating instruments, analyzing samples, and assessing QC were consistent with EPA methodology.

The data validations, data verifications, and Data Quality Objectives (DQO) checks conducted on analytical results at BNL are designed to eliminate any data that fails to meet the DQOs of each project. The results of the independent Performance Evaluation assessments and assessments of contractor laboratories summarized in this chapter are also used to assess the quality of the results. Therefore, the data used in this Site Environmental Report are of acceptable quality.

Chapter 9 of this report describes the BNL Quality Assurance/Quality Control Program in further detail.



# 2021 SITE ENVIRONMENTAL REPORT

*The SER Team thanks the many Lab employees who contributed to and assisted with this report.*



## **The 2021 SER Team**

*(Back row, left to right) Jennifer Higbie, Timothy Green, Douglas Paquette, Jason Remien, and William Dorsch.  
(Front row, left to right) Larry Singh, Robert Howe, Jeffrey Williams, Amber Aponte, and Timothy Welty  
(not pictured: Deborah Bauer, Amy Engel, Sarah Mahler, Nicole Puglin).*



## **The Environmental Protection Division Field Sampling Team**

*(From left to right) AJ Scheff, Richard Lagattolla, and James Ferraiuolo (not pictured: Melissa Yost).*

*Intentionally Left Blank*

# Acknowledgments

The production of the BNL 2021 Site Environmental Report (SER), Volume I, required the knowledge, skill, experience, and cooperation of many people and organizations at the Laboratory. The lead authors, co-authors, and other contributing staff involved in producing the report are listed below.

## LEAD CHAPTER AUTHORS

### ENVIRONMENTAL PROTECTION DIVISION

EXECUTIVE SUMMARY	Amber Aponte	CHAPTER 5	Timothy Green
CHAPTER 1	Amy Engel & Amber Aponte	CHAPTER 6	Timothy Green
CHAPTER 2	Deborah Bauer	CHAPTER 7	William Dorsch/Douglas Paquette
CHAPTER 3	Jason Remien	CHAPTER 8	Tim Welty
CHAPTER 4	Jeffrey Williams	CHAPTER 9	Larry Singh

## CO-AUTHORS AND/OR KEY CONTRIBUTORS

### ENVIRONMENTAL PROTECTION DIVISION

James Ferraiuolo  
Jennifer Higbie  
Robert Howe  
Richard Lagattolla  
Robert Metz  
AJ Scheff  
Glen Todzia  
Melissa Yost

### STAKEHOLDER & COMMUNITY RELATIONS

Amy Engel

### FACILITIES AND OPERATIONS

Chris Bruno

### RADIOLOGICAL CONTROL DIVISION

Nate Foster

### SER PROJECT COORDINATOR

Amber Aponte, Environment, Safety & Health Division

### GRAPHIC DESIGNER

Lisa Jansson, Stakeholder & Community Relations

### PHOTOGRAPHER

Roger Stoutenburgh, Stakeholder & Community Relations

“Thank you” to the staff and management of the following organizations who assisted the authors in the preparation of this report by providing technical peer reviews, sample and data collection, maps and diagrams, and other support necessary to make this report possible.

Stakeholder and Community Relations  
Environment, Safety & Health Directorate  
Environmental Protection Division  
Environmental Information Management System Group  
Groundwater Protection Group

Office of Educational Programs  
Information Services Division  
Media & Communications Office and Production Services  
Facilities and Operations Directorate  
Radiological Control Division



### ***A Note from the Editor***

Throughout the Site Environmental Report, there are many references to Brookhaven National Laboratory (BNL), the U.S. Department of Energy (DOE), and the U.S. Environmental Protection Agency (EPA). These acronyms, and others that are explained in each chapter, are used interchangeably with their spelled-out forms as an aid to readers. The most up-to-date, accurate version of this report is online at <https://www.bnl.gov/esh/env/ser/>.

# Contents

Executive Summary .....	iii
Acknowledgments .....	xiii
List of Tables .....	xxi
List of Figures .....	xxii

## CHAPTER 1: INTRODUCTION

1.1 Laboratory Vision and Mission .....	1-1
1.2 Major Initiatives .....	1-2
1.3 History and Overview of Major Scientific Facilities .....	1-3
1.4 Facilities and Operations .....	1-8
1.5 Location, Local Population, and Local Economy .....	1-10
1.6 Geology and Hydrology .....	1-11
1.7 Climate .....	1-12
1.8 Natural Resources .....	1-14
1.9 Cultural Resources .....	1-14
References and Bibliography .....	1-17

## CHAPTER 2: ENVIRONMENTAL MANAGEMENT SYSTEM

2.1 Integrated Safety Management and ISO 14001 .....	2-2
2.2 Environmental, Safety, Security, and Health Policy .....	2-3
2.3 Planning .....	2-3
2.3.1 Environmental Aspects .....	2-3
2.3.2 Compliance Obligations .....	2-4
2.3.3 Objectives and Targets .....	2-4
2.3.4 Environmental Management Programs .....	2-5
2.3.4.1 Compliance .....	2-5
2.3.4.2 Groundwater Protection .....	2-6
2.3.4.3 Waste Management .....	2-7
2.3.4.4 Pollution Prevention and Waste Minimization .....	2-7
2.3.4.5 Water Conservation .....	2-11
2.3.4.6 Energy Management and Conservation .....	2-12
2.3.4.7 Natural and Cultural Resource Management Programs .....	2-15
2.3.4.8 Environmental Restoration .....	2-15
2.4 Implementing the Environmental Management System .....	2-16
2.4.1 Structure and Responsibility .....	2-16
2.4.2 Communication and Community Involvement .....	2-16

2.4.2.1	Communication Forums.....	2-18
2.4.2.2	Community Involvement in Cleanup Projects.....	2-19
2.4.3	Monitoring and Measurement.....	2-20
2.4.3.1	Compliance Monitoring.....	2-22
2.4.3.2	Restoration Monitoring.....	2-22
2.4.3.3	Surveillance Monitoring.....	2-22
2.4.4	EMS Assessments.....	2-22
2.5	Environmental Stewardship at BNL.....	2-23
	References and Bibliography.....	2-24

### CHAPTER 3: COMPLIANCE STATUS

3.1	Compliance with Requirements.....	3-2
3.2	Compliance With Requirements.....	3-2
3.2.1	Existing Permits.....	3-2
3.2.2	New or Modified Permits.....	3-2
3.2.2.1	New York State Wetlands and Wild, Scenic, Recreational Rivers Act....	3-2
3.2.2.2	SPDES Permit Renewal... ..	3-2
3.2.3	EPA's Enforcement & Compliance History Online (ECHO).....	3-2
3.3	NEPA Assessments.....	3-2
3.4	Preservation Legislation.....	3-7
3.5	Clean Air Act (CAA).....	3-7
3.5.1	Conventional Air Pollutants.....	3-7
3.5.1.1	Boiler Emissions.....	3-7
3.5.1.2	Ozone-Depleting Substances.....	3-10
3.5.2	Hazardous Air Pollutants.....	3-10
3.5.2.1	Maximum Available Control Technology.....	3-10
3.5.2.2	Asbestos.....	3-10
3.5.2.3	Radioactive Airborne Emissions.....	3-10
3.6	Clean Water Act.....	3-11
3.6.1	Sewage Treatment Plant.....	3-11
3.6.2	Recharge Basins and Stormwater.....	3-16
3.7	Safe Drinking Water Act.....	3-16
3.7.1	Potable Water.....	3-16
3.7.2	Cross-Connection Control.....	3-18
3.7.3	Underground Injection Control.....	3-18
3.8	Preventing and Reporting Spills.....	3-20
3.8.1	Preventing Oil Pollution and Spills.....	3-20
3.8.2	Emergency Reporting Requirements.....	3-20
3.8.3	Spills and Releases.....	3-24
3.8.4	Major Petroleum Facility License.....	3-24



3.8.5 Chemical Bulk Storage .....	3-25
3.8.6 County Storage Requirements.....	3-26
3.9 RCRA Requirements .....	3-26
3.10 Polychlorinated Biphenyls.....	3-26
3.11 Pesticides .....	3-27
3.12 Wetlands and River Permits .....	3-28
3.13 Protection of Wildlife.....	3-28
3.13.1 Endangered Species Act.....	3-28
3.13.2 Migratory Bird Treaty Act .....	3-29
3.13.3 Bald and Golden Eagle Protection Act.....	3-29
3.14 Public Notification of Clearance of Property .....	3-30
3.15 External Audits and Oversight .....	3-30
3.15.1 Regulatory Agency Oversight .....	3-30
3.15.2 DOE Assessments/Inspections.....	3-31
3.15.3 Environmental Multi-Topic Assessment.....	3-31
3.15.4 Nevada National Security Site.....	3-33
3.16 Agreements, Enforcement Actions, and Other Environmental Reports.....	3-33
References and Bibliography .....	3-33

#### CHAPTER 4: AIR QUALITY

4.1 Radiological Emissions.....	4-1
4.2 Facility Monitoring .....	4-1
4.2.1 High Flux Beam Reactor.....	4-2
4.2.2 Brookhaven Linac Isotope Producer .....	4-3
4.2.3 Target Processing Laboratory .....	4-3
4.2.4 Additional Minor Sources .....	4-3
4.2.5 Nonpoint Radiological Emission Sources.....	4-3
4.3 Ambient Air Monitoring.....	4-4
4.3.1 Gross Alpha and Beta Airborne Activity .....	4-4
4.3.2 Airborne Tritium .....	4-5
4.4 Nonradiological Airborne Emissions.....	4-6
4.5 Greenhouse Gas Emissions .....	4-8
4.5.1 Hydrofluorocarbons.....	4-10
References and Bibliography.....	4-10

#### CHAPTER 5: WATER QUALITY

5.1 Surface Water Monitoring Program.....	5-1
5.2 Sanitary System Effluents .....	5-3
5.2.1 Sanitary System Effluent – Radiological Analyses.....	5-4

5.2.2 Sanitary System Effluent – Nonradiological Analyses .....	5-6
5.3 Process-Specific Wastewater .....	5-6
5.4 Recharge Basins .....	5-7
5.4.1 Recharge Basins – Radiological Analyses .....	5-8
5.4.2 Recharge Basins – Nonradiological Analyses .....	5-8
5.4.3 Stormwater Assessment .....	5-9
5.5 Peconic River Surveillance .....	5-11
5.5.1 Peconic River – Radiological Analyses .....	5-12
5.5.2 Peconic River – Nonradiological Analyses .....	5-13
References and Bibliography .....	5-16

## CHAPTER 6: NATURAL AND CULTURAL RESOURCES

6.1 Natural Resource Management Program .....	6-1
6.1.1 Identification and Mapping .....	6-1
6.1.2 Habitat Protection and Enhancement .....	6-3
6.1.2.1 Salamander Protection Efforts .....	6-3
6.1.2.2 Banded Sunfish .....	6-4
6.1.2.3 Migratory Birds .....	6-4
6.1.2.4 Bald Eagle .....	6-5
6.1.2.5 Northern Long-eared Bat .....	6-5
6.1.3 Population Management .....	6-5
6.1.3.1 Wild Turkey .....	6-5
6.1.3.2 White-Tailed Deer .....	6-6
6.1.4 Compliance Assurance and Potential Impact Assessment .....	6-6
6.2 Upton Ecological and Research Reserve .....	6-7
6.3 Monitoring Flora and Fauna .....	6-7
6.3.1 Deer Sampling .....	6-7
6.3.1.1 Cesium-137 in White-Tailed Deer .....	6-8
6.3.2 Other Animals Sampled .....	6-13
6.3.3 Fish Sampling .....	6-13
6.3.3.1 Fish Population Assessment .....	6-13
6.3.4 Vegetation Sampling .....	6-13
6.3.4.1 Grassy Plants and Soil .....	6-13
6.4 Precipitation Monitoring .....	6-15
6.4.1 Mercury Monitoring of Precipitation .....	6-15
6.5 Educational Programs .....	6-16
6.6 Cultural Resource Activities .....	6-16
References and Bibliography .....	6-17

## CHAPTER 7: GROUNDWATER PROTECTION

7.1 The BNL Groundwater Protection Management Program.....	7-1
7.1.1 Prevention .....	7-1
7.1.2 Monitoring .....	7-2
7.1.3 Remediation.....	7-2
7.1.4 Communication.....	7-2
7.2 Groundwater Protection Performance .....	7-2
7.3 Groundwater Monitoring Programs .....	7-3
7.4 Groundwater Monitoring Results .....	7-7
7.5 Groundwater Treatment Systems .....	7-7
References and Bibliography.....	7-10

## CHAPTER 8: RADIOLOGICAL DOSE ASSESSMENT

8.0 Introduction.....	8-2
8.1 Direct Radiation Monitoring .....	8-2
8.1.1 Ambient Radiation Monitoring.....	8-2
8.1.2 Facility Area Monitoring .....	8-6
8.1.2.1 Neutron Monitoring .....	8-8
8.2 Dose Modeling for Airborne Radionuclides .....	8-9
8.2.1 Dose Modeling Program.....	8-9
8.2.2 Dose Calculation Methods and Pathways.....	8-12
8.2.2.1 Maximally Exposed Off-site and On-site Individual.....	8-12
8.2.2.2 Dose Calculation: Fish Ingestion .....	8-12
8.2.2.3 Dose Calculation: Deer Meat Ingestion .....	8-12
8.3 Sources: Diffuse, Fugitive, “Other” .....	8-13
8.3.1 Remediation Work .....	8-13
8.4 Dose From Point Sources .....	8-13
8.4.1 Brookhaven Linac Isotope Producer.....	8-13
8.4.2 Target Processing Laboratory.....	8-13
8.4.3 High Flux Beam Reactor.....	8-13
8.4.4 Brookhaven Medical Research Reactor .....	8-13
8.4.5 Brookhaven Graphite Research Reactor.....	8-13
8.4.6 Waste Management Facility .....	8-14
8.4.7 Unplanned Releases.....	8-14
8.5 Dose From Ingestion .....	8-14
8.6 Dose to Aquatic and Terrestrial Biota.....	8-15
8.7 Dose From All Pathways .....	8-15
References and Bibliography.....	8-16



## CHAPTER 9: QUALITY ASSURANCE

9.1 Quality Program Elements .....	9-1
9.2 Sample Collection and Handling.....	9-2
9.2.1 Field Sample Handling.....	9-3
9.2.1.1 Custody and Documentation .....	9-3
9.2.1.2 Preservation and Shipment .....	9-3
9.2.2 Field Quality Control Samples.....	9-3
9.2.3 Tracking and Data Management.....	9-4
9.3 Sample Analysis.....	9-5
9.3.1 Qualifications.....	9-5
9.4 Verification and Validation of Analytical Results .....	9-5
9.4.1 Checking Results .....	9-7
9.5 Contract Analytical Laboratory QA/QC .....	9-7
9.6 Performance or Proficiency Evaluations.....	9-7
9.6.1 Summary of Test Results.....	9-7
9.6.1.1 Radiological Assessments .....	9-9
9.6.1.2 Nonradiological Assessments .....	9-9
9.7 Audits .....	9-9
9.8 Conclusion.....	9-10
References and Bibliography .....	9-10
Appendix A: Glossary.....	A-1
Acronyms and Abbreviations.....	A-1
Technical Terms.....	A-5
Appendix B: Understanding Radiation.....	B-1
Appendix C: Units of Measure and Half-Life Periods .....	C-1
Appendix D: Federal, State, and Local Laws and Regulations Pertinent to BNL .....	D-1
Appendix E: BNL Site Sustainability Plan: Status Summary for Fiscal Year 2020 .....	E-1

## *List of Tables*

Table 2-1.	BNL Pollution Prevention, Waste Reduction, and Recycling Programs, 2021 .....	2-8
Table 2-2.	BNL Recycled Program Summary, 2012-2021. ....	2-11
Table 2-3.	Summary of BNL 2021 Environmental Restoration Activities .....	2-17
Table 2-4.	Summary of BNL Sampling Program Sorted by Media, 2021 .....	2-20
Table 3-1.	Federal, State, and Local Environmental Statutes and Regulations Applicable to BNL.....	3-3
Table 3-2.	BNL Environmental Permits. ....	3-8
Table 3-3.	Analytical Results for Wastewater Discharges to Sewage Treatment Plant Outfall 001 .....	3-12
Table 3-4.	Analytical Results for Wastewater Discharges to Outfalls 002, 005 - 008, and 010. ....	3-17
Table 3-5.	Potable Water Wells and Potable Distribution System: Analytical Results (Maximum Concentration, Minimum pH Value).....	3-19
Table 3-6.	Potable Water Wells: Analytical Results for Principal Organic Compounds, Synthetic Organic Chemicals, Pesticides, Micro-Extractables, and Perfluorinated Compounds. ....	3-21
Table 3-7.	Applicability of EPCRA to BNL .....	3-25
Table 3-8.	Summary of Chemical and Oil Spill Reports.....	3-27
Table 3-9.	Existing Agreements and Enforcement Actions Issued to BNL With Status.....	3-32
Table 4-1.	Airborne Radionuclide Releases from Monitored Facilities. ....	4-3
Table 4-2.	Gross Activity in Facility Air Particulate Filters.....	4-4
Table 4-3.	Gross Activity Detected in Ambient Air Monitoring Particulate Filters.....	4-4
Table 4-4.	Ambient Airborne Tritium Measurements in 2021. ....	4-8
Table 4-5.	Central Steam Facility Fuel Use and Emissions (2012–2021). ....	4-8
Table 5-1.	Tritium and Gross Activity in Water at the BNL Sewage Treatment Plant (STP). ....	5-4
Table 5-2.	Radiological Analysis of Samples from BNL On-Site Recharge Basins (2021). ....	5-8
Table 5-3.	Water Quality Data for BNL On-Site Recharge Basin Samples.....	5-9
Table 5-4.	Metals Analysis of Water Samples from BNL On-Site Recharge Basins.....	5-10
Table 5-5.	Radiological Results for Surface Water Samples Collected Along the Peconic and Carmans Rivers. ....	5-12
Table 5-6.	Water Quality Analytical Results for Data for Surface Water Samples Collected Along the Peconic and Carmans Rivers (2021). ....	5-13
Table 5-7.	Metals Analytical Results in Surface Water Samples Collected Along the Peconic and Carmans Rivers. ....	5-14
Table 6-1.	Federal and New York State Threatened & Endangered Species, Species of Special Concern, & Species of Greatest Conservation Need. ....	6-2
Table 6-2.	Radiological Analysis of Deer Tissue (2021).....	6-10
Table 6-3.	Radiological Analysis of Grassy Vegetation and Associated Soils .....	6-15
Table 6-4.	Precipitation Monitoring (Mercury) .....	6-15
Table 7-1.	BNL Groundwater Remediation Systems Treatment Summary for 1997 through 2021.....	7-8
Table 8-1.	Five-Year Annual On-Site Direct Ambient Radiation Measurements (2017-2021).....	8-6
Table 8-2.	Five-Year Annual Off-Site Direct Ambient Radiation Measurements (2017-2021).....	8-7
Table 8-3.	Five-Year Annual Facility Area Monitoring Results (2017-2021).....	8-7
Table 8-4.	Five-Year Annual Neutron Monitoring Results (2017-2021).....	8-10
Table 8-5.	Maximally Exposed Off-site Individual Effective Dose Equivalent From Facilities or Routine Processes, 2021....	8-11
Table 8-6.	Five-Year Site Dose Summary, 2021. ....	8-14
Table 8-7.	Five-Year Annual Maximally Exposed Onsite Individual Dose (2017-2021).....	8-15
Table 9.1.	Summary of Detections in Trip and Field Blank Samples.....	9-6
Table 9.2.	Summary Results of 2021 DOECAP Audits .....	9-9

## *List of Figures*

Figure 1-1.	Major Scientific Facilities at BNL.....	1-9
Figure 1-2.	Major Support and Service Facilities at BNL.....	1-10
Figure 1-3.	BNL Groundwater Flow Map.....	1-12
Figure 1-4.	BNL Wind Rose (2021). .....	1-13
Figure 1-5.	BNL 2021 Monthly Mean Temperature versus 71-Year Monthly Average.....	1-15
Figure 1-6.	BNL 2021 Annual Mean Temperature Trend (71 Years).....	1-15
Figure 1-7.	BNL 2021 Monthly Precipitation versus 71-Year Monthly Average.....	1-16
Figure 1-8.	BNL 2021 Annual Precipitation Trend (71 Years).....	1-16
Figure 2-1a.	Hazardous Waste Generation from Routine Operations, 2011 – 2021.....	2-5
Figure 2-1b.	Mixed Waste Generation from Routine Operations, 2011 – 2021. ....	2-5
Figure 2-1c.	Radioactive Waste Generation from Routine Operations, 2011 – 2021.....	2-5
Figure 2-1d.	Hazardous Waste Generation from ER and Nonroutine Operations, 2011 – 2021.....	2-6
Figure 2-1e.	Mixed Waste Generation from ER and Nonroutine Operations, 2011 – 2021.....	2-6
Figure 2-1f.	Radioactive Waste Generation from ER and Nonroutine Operations, 2011 – 2021. ....	2-6
Figure 2-2.	Annual Potable Water Use, 1999 – 2021.....	2-13
Figure 2-3.	BNL Building Energy Performance for 2021. ....	2-16
Figure 3-1.	Maximum Concentrations of Copper Discharged from the BNL Sewage Treatment Plant, 2016 – 2021. ....	3-13
Figure 3-2.	Maximum Concentrations of Iron Discharged from the BNL Sewage Treatment Plant, 2016 – 2021. ....	3-13
Figure 3-3.	Maximum Concentrations of Lead Discharged from the BNL Sewage Treatment Plant, 2016 – 2021. ....	3-14
Figure 3-4.	Maximum Concentrations of Mercury Discharged from the BNL Sewage Treatment Plant, 2016 – 2021. ....	3-14
Figure 3-5.	Maximum Concentrations of Nickel Discharged from the BNL Sewage Treatment Plant, 2016 – 2021. ....	3-15
Figure 3-6.	Maximum Concentrations of Silver Discharged from the BNL Sewage Treatment Plant, 2016 – 2021. ....	3-15
Figure 3-7.	Maximum Concentrations of Zinc Discharged from the BNL Sewage Treatment Plant, 2016 – 2021. ....	3-15
Figure 3-8.	Spills Trend, 2017-2021. ....	3-24
Figure 4-1.	Air Emission Release Points Subject to Monitoring.....	4-2
Figure 4-2.	BNL On-Site Ambient Air Monitoring Stations.....	4-5
Figure 4-3.	Airborne Gross Beta Concentration Trend Recorded at Station P7.....	4-7
Figure 4-4.	BNL Scope 3 Greenhouse Gases: Impacts of Covid-19.....	4-9
Figure 5-1.	Sampling Stations for Surface Water and Fish.....	5-2
Figure 5-2.	Schematic of BNL's Sewage Treatment Plant (Recharge Basin Discharge).....	5-3
Figure 5-3.	BNL Recharge Basin/Outfall Locations.....	5-5
Figure 5-4.	Schematic of Potable Water Use and Flow at BNL.....	5-6
Figure 6-1.	Deer Sample Locations, 2017 – 2021. ....	6-9
Figure 6-2.	Comparison of Cs-137 Values in Deer Flesh.....	6-12
Figure 6-3.	Ten-Year Trend of Cs-137 Concentrations in Deer Flesh.....	6-12
Figure 6-4.	Vegetation and Soil Sampling Locations.....	6-14

Figure 7-1.	Groundwater Flow and Water Table Elevation (January 2021) With Supply and Remediation Wells Shown. ....	7-4
Figure 7-2.	Extent of VOC Plumes.....	7-5
Figure 7-3.	Extent of Radionuclide Plumes. ....	7-6
Figure 7-4.	Locations of BNL Groundwater Remediation Systems. ....	7-9
Figure 8-1.	On-Site TLD Locations.....	8-3
Figure 8-2.	Off-Site TLD Locations. ....	8-4
Figure 8-3.	On-Site Neutron TLD Locations. ....	8-8
Figure 9-1.	Flow of Environmental Monitoring QA/QC Program Elements. ....	9-2
Figure 9-2.	Summary of Scores in the Radiological Proficiency Evaluation Programs.....	9-8
Figure 9-3.	Summary of Scores in the Nonradiological Proficiency Evaluation Programs. ....	9-8



# Introduction

Established in 1947, Brookhaven National Laboratory (BNL) is one of ten national laboratories overseen and primarily funded by the U.S. Department of Energy's (DOE) Office of Science. The only multi-program national laboratory in the Northeast, the Laboratory is operated and managed by Brookhaven Science Associates (BSA), which was founded by the Research Foundation for the State University of New York on behalf of Stony Brook University, and Battelle, a non-profit applied science and technology organization. BNL is committed to longstanding partnerships with researchers, academic institutions, industry, students, teachers, and the surrounding community.

BSA has been managing and operating the Laboratory under a performance-based contract with DOE since 1998. From 1947 to 1998, BNL was operated by Associated Universities, Incorporated. Prior to 1947, the site operated as Camp Upton, a U.S. Army training camp, which was active from 1917 to 1921 during and after World War I and from 1940 to 1946 during and after World War II.

BNL has a history of outstanding scientific achievements. For nearly 75 years, Laboratory researchers have successfully worked to envision, construct, and operate large and innovative scientific facilities in pursuit of research advances in many fields. Programs in place at BNL emphasize continual improvement in environmental, safety, security, and health performance.

## 1.1 LABORATORY VISION AND MISSION

Brookhaven National Lab's (BNL) vision is to produce discovery science and transformative technology to power and secure the Nation's future. The Lab's mission is to deliver expertise and capabilities that drive scientific breakthroughs and innovation for today and tomorrow. BNL carries out its mission safely, securely, and responsibly, with a commitment to diversity, equity, and inclusion, and with the cooperation and involvement of local, state, national, and international communities.

As a U.S. Department of Energy (DOE) Office of Science laboratory, BNL has a strong focus on fundamental science—particularly in nuclear and high energy physics; clean energy and climate; quantum information science and technology; human-Artificial Intelligence-facility integration; isotope production; and accelerator science and technology—all enabled by its unique suite of powerful facilities and capabilities, led by its remarkable staff. BNL conceptualizes, designs,

builds, and operates major scientific facilities in support of its DOE mission. These facilities serve DOE's basic research needs and reflect BNL/DOE stewardship of national research infrastructure critical for university, industry, and government researchers.

The Laboratory's high-level, enduring science and technology (S&T) priorities define and distinguish BNL. They fall broadly into the following areas:



BNL Main Gate Sign

## CHAPTER 1: INTRODUCTION

- Discovery Science and Technology to address national needs such as:
  - Nuclear and particle physics to gain a deeper understanding of matter, energy, space, and time;
  - Recognized strengths in advanced materials, catalysis, bioenergy, environmental systems, and climate to put the U.S. on a path to a net-zero economy;
  - Advanced computer science, applied math, data science, and computational science to transform scientific discovery at BNL's facilities and enhance its science programs; and
- Advanced and emerging technology with demonstrated strengths in instrumentation, magnet, accelerator, and laser S&T.
- Transformational user facilities that position the Laboratory and the Nation for continued leadership roles in science and technology. These facilities are enabled by advanced accelerator science and technology.
- Application of the results of BNL's discovery science to address emerging opportunities, including clean energy solutions, isotopes, national security solutions, and national emergencies.

To achieve the Laboratory's vision and mission requires simultaneous excellence in all aspects of BNL's work – from science and operations, to external partnerships with the local, state, and national communities, and beyond. This is enabled by safe, efficient, and secure operations; by an unwavering commitment to a diverse, equitable, and inclusive environment, workforce development, and reaching out to the community; and by a strong focus on renewed infrastructure that drives regional outreach and partnerships to address national needs.

BNL is a world leader in scientific research and performs this work in an environmentally responsible and safe manner. Each employee, contractor, and guest is expected to take personal responsibility for adhering to BNL's Environmental, Safety, Security, and Health (ESSH) Policy. This policy states the Laboratory's commitment to environmental stewardship, the safety of the public and BNL employees, the security of the site, and continual improvement. In 2021, the ESSH Policy was updated to reflect a stronger emphasis on sustainability in addition to compliance.

In 2001, BNL was the first DOE Office of Science National Laboratory to achieve full registration under the International Organization for Standardization (ISO) 14001 environmental management standard. This program is discussed in Chapter 2 of this report.

### 1.2 MAJOR INITIATIVES

BNL has identified scientific initiatives, that when achieved, will help realize the larger vision and mission of the Lab. These initiatives align with the DOE Strategic Goals in Science, Energy, and Nuclear Security and build on the Laboratory's core strengths and capabilities. The breadth of BNL's core programs serves as the foundation for the seven initiatives. The initiatives are highly interconnected, utilizing the Lab's user facilities and the S&T capabilities across the BNL complex.

The seven initiatives are:

- *Nuclear Physics*: Uncover the structure of visible matter by constructing and operating the Electron-Ion Collider (EIC) at BNL to maintain international leadership in nuclear physics for decades.
- *Clean Energy and Climate*: Support a net-zero U.S. economy through fundamental research in basic energy and climate sciences to revolutionize grid-scale storage, renewable integration, and the study of atmospheric processes to improve climate predictability.
- *Quantum Information Science and Technology*: Discover new quantum materials to enhance quantum computers and develop an entanglement sharing quantum network as a prototype for the first quantum internet.
- *Artificial Intelligence and Data Science*: Revolutionize the operation of experiments across the sciences at user facilities and in core programs.
- *High Energy Physics*: Understand the origin of space, time, and matter with the ATLAS high luminosity upgrade at CERN and the future Long Baseline Neutrino Facility/Deep Underground Neutrino Experiment.
- *Isotope Production*: Accelerate and expand isotope production to ensure the security of the Nation's supply.
- *Accelerator Science and Technology*: Harness the cross-cutting accelerator science

expertise at BNL to develop new facilities, improve and expand its user facilities, and promote the use of accelerators in industry.

In support of these initiatives, the Laboratory operates cutting-edge large-scale facilities for studies in physics, chemistry, biology, medicine, applied science, and a wide range of advanced technologies. BNL's world-class research facilities are also available to university, industrial, and government personnel from around the world. The Laboratory integrates sustainable operations and environmental stewardship into all facets of its research and operations and is committed to managing its programs in a manner that protects the local ecosystem and public health.


In addition to major research activities, the Laboratory provides expertise and other programs in a range of areas including accelerator science and technology, biological imaging, homeland and national security, and advanced computation.

To date, researchers working at BNL have received seven Nobel Prizes, multiple National Medals of Science, National Medal of Technology and Innovation, National Academy of Sciences, Enrico Fermi Awards, Wolf Foundation Prizes, nearly 40 R&D 100 Awards, as well as other recognitions for discoveries made wholly or partly at BNL. Some significant discoveries and developments made at the Laboratory include new forms of matter, subatomic particles, technologies that fuel leading experimental programs around the world, and lifesaving medical imaging techniques for diagnosis and treatment of disease.

### 1.3 HISTORY AND OVERVIEW OF MAJOR SCIENTIFIC FACILITIES

BNL was founded in 1947 by the Atomic Energy Commission (AEC), a predecessor to the present DOE. The AEC provided the initial funding for BNL's research into peaceful uses of the atom. The objective was to promote basic research in the physical, chemical, biological, and engineering aspects of the atomic sciences. The result was the creation of a regional laboratory to design, construct, and operate large scientific machines that individual institutions could not afford to develop on their own.

Although BNL no longer operates any research reactors, the Laboratory's first major scientific

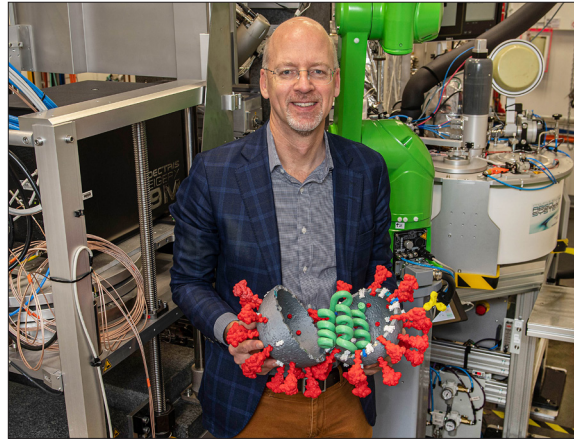

John Hill, Director, National Synchrotron Light Source II (NSLS-II) & Deputy Associate Laboratory Director for Energy & Photon Sciences, NSLS-II. BNL's NSLS-II was instrumental in providing data supporting development of a COVID-19 vaccine.

facility was the Brookhaven Graphite Research Reactor (BGRR), which was the first reactor to be constructed in the United States following World War II. In operation from 1950 to 1968, the reactor's primary mission was to produce neutrons for scientific experimentation and to refine reactor technology. Decommissioning of the BGRR was completed in June 2012, and the remaining structures are currently undergoing long-term routine inspection and surveillance.

The High Flux Beam Reactor (HFBR) was in operation from 1965 through 1996. The facility was used solely for scientific research and provided neutrons for experiments in materials science, chemistry, biology, and physics. The HFBR also allowed researchers to study the basic nature of chemical structures, including the hydrogen bond that holds much of our world together. In late 1996, workers discovered that a leak in the HFBR spent fuel storage pool had been releasing tritium to the groundwater (see SER, Volume II, Groundwater Status Report, for further details). The reactor was shut down for routine maintenance at the time of the discovery and was never restarted. In November 1999, DOE decided that the HFBR would be permanently shut down. With input from the community, a final Record of Decision (ROD) was approved outlining the remedy for the HFBR's permanent decontamination and decommissioning. In February 2021, the adjacent Stack, which served as an exhaust for the HFBR and BGRR,



## CHAPTER 1: INTRODUCTION

was safely demolished (see the cover story).

Medical research at BNL began in 1950 with the opening of one of the first hospitals devoted to nuclear medicine. It was followed by the Medical Research Center in 1958 and the Brookhaven Medical Research Reactor (BMRR) in 1959. The BMRR was the first nuclear reactor in the nation to be constructed specifically for medical research. Due to a reduction of research funding, the BMRR was shut down in December 2000. All spent fuel from the BMRR has been removed and transported off site. The facility is currently in a “cold” shutdown mode as a radiological facility and has entered a period of surveillance and maintenance.


The Brookhaven Linac Isotope Producer (BLIP) has been in operation since 1972. Positioned at the forefront of research into radioisotopes used in cancer treatment and diagnosis, the BLIP produces commercially unavailable radioisotopes for use by the medical community and related industries. BLIP consists of an accelerator beam line and target area for generating radioisotopes already in high demand and for developing those required at the frontiers of nuclear medicine. In conjunction with this mission, scientists also perform irradiations for non-isotope applications and explore opportunities for emerging radioisotope applications.

High-energy particle physics research at BNL began in 1952 with the Cosmotron, the first particle accelerator to achieve billion-electron-volt energies. Work at the Cosmotron resulted in a Nobel Prize in 1957. After 14 years of service, the Cosmotron ceased operation in 1966 and was dismantled in 1969. Knowledge gained from the Cosmotron led to design improvements and paved the way for construction of the Alternating Gradient Synchrotron (AGS). The AGS is a much larger particle accelerator and became operational in 1960.

The AGS has allowed scientists to accelerate protons to energies that have yielded many discoveries of new particles and phenomena, for which BNL researchers were awarded three Nobel Prizes.

The AGS receives protons from BNL’s linear accelerator (LINAC), designed and built in the late 1960s as a major upgrade to the AGS complex. The LINAC’s purpose is to provide accelerated

protons for use at AGS facilities and BLIP. The AGS booster, constructed in 1991, further enhanced the capabilities of the AGS, enabling it to accelerate protons and heavy ions to even higher energies.

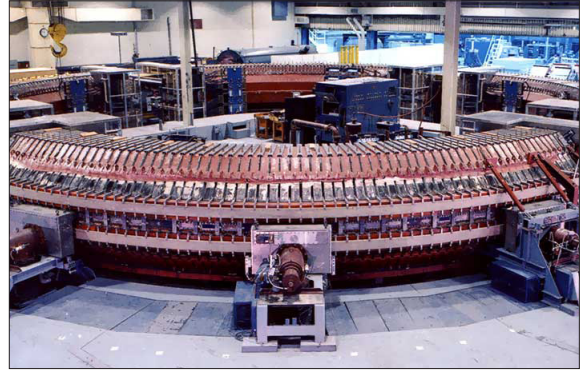


Cosmotron (1952-1966)

The Tandem Van de Graaff accelerator began operating in 1970 and is the starting point of the chain of accelerators that provide ions of gold, other heavy metals, and protons for experiments at the Relativistic Heavy Ion Collider (RHIC). In 2010, BNL began operating a new heavy ion beam source for use by RHIC and the NASA Space Radiation Laboratory, the Electron Beam Ion Source (EBIS). This large electrostatic accelerator can provide researchers with beams of more than 40 different types of ions ranging from hydrogen to uranium. By simulating the effects of radiation both in space and on the ground, scientists and engineers from several other laboratories and companies are improving the reliability of computers.

RHIC began operation in 2000. Inside this two-ringed particle accelerator, two beams of gold ions, heavy metals, or protons circulate at nearly the speed of light and collide, head-on, releasing large amounts of energy. By smashing particles together to recreate the conditions of the early universe, scientists can explore the most fundamental building blocks of matter as they existed just after the Big Bang. This research unlocks secrets of the force that holds together 99 percent of the visible universe—everything from stars to planets and people—and triggers advances in science and technology that have applications in fields from medicine to national security. RHIC has been continuously upgraded and its productivity now exceeds its initial design by 100 times.



The most recent upgrade is the Low-Energy RHIC Electron Cooling project, which supports a new research program.

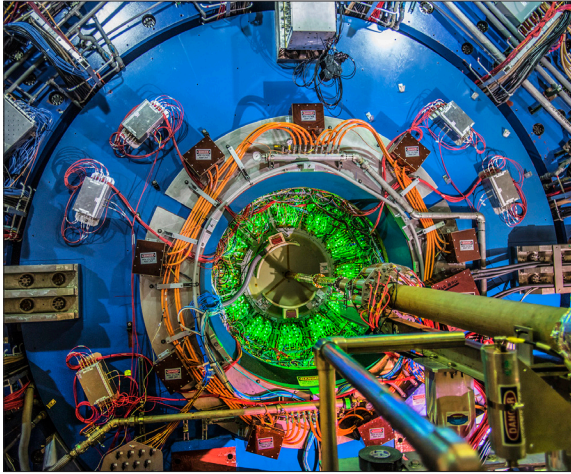

The STAR Detector at RHIC

After completing its 22nd successful physics run, RHIC will be getting a brand-new house-sized particle detector. This new detector, known as sPHENIX – together with RHIC’s newly enhanced STAR detector – will greatly advance physicists’ ability to study subtle details of quark-gluon plasma – a remarkable form of matter that filled the early Universe. RHIC recreates tiny specks of this early-Universe particle soup thousands of times each second by colliding the nuclei of atoms at nearly the speed of light.

In 2020, the DOE awarded the construction of the next generation accelerator, the Electron-Ion Collider (EIC), to BNL. A collaboration between BNL and Thomas Jefferson Accelerator Laboratory, the EIC will be built by reusing one of the RHIC accelerators and the addition of an electron accelerator to allow collisions of electrons and ions, giving scientists a rare and exciting opportunity to explore and study the internal structures of atomic nuclei. What we learn from the EIC could power the technologies of tomorrow.

The NASA Space Radiation Laboratory (NSRL) became operational in 2003. It is jointly managed by DOE’s Office of Science and NASA’s Johnson Space Center. The NSRL uses heavy ions to simulate space radiation and study the effects on biological specimens, such as cells, tissues, and DNA, as well as industrial materials. Studies are

conducted to identify materials and methods that would reduce the risks astronauts will face on future long-term space missions.

The National Synchrotron Light Source (NSLS) used a linear accelerator and booster synchrotron to guide charged particles in orbit inside two electron storage rings for use in a wide range of physical and biological experiments. Using beams of very intense light in the x-ray, ultraviolet, and infrared spectra, the NSLS allowed scientists to study the structure of proteins, investigate the properties of new materials, and understand the fate of chemicals in the environment. Although the NSLS had been continually updated since its commissioning in 1982, the practical limits of its performance had been reached and operations permanently ceased in September 2014.

To continue advances in these fields, the NSLS-II was constructed. The NSLS-II generates intense beams of x-ray, ultraviolet, and infrared light and offers an array of sophisticated imaging techniques to capture atomic-level “pictures” of a wide variety of materials, from biological molecules to semi-conductor devices. NSLS-II has a nanometer-scale resolution—a key resource for researchers at BNL’s Center for Functional Nanomaterials (CFN)—that will enhance the development of next-generation sustainable energy technologies and improve imaging of complex protein structures.



National Synchrotron Light Source II

BNL’s CFN is one of five Nanoscale Science Research Centers funded by DOE’s Office of Science and provides state-of-the-art tools for creating and exploring the properties of materials with dimensions spanning just billionths of a meter.

## CHAPTER 1: INTRODUCTION

CFN scientists are dedicated to atomic-level tailoring that addresses a wide range of energy challenges. CFN focus areas include improving solar cells and other electronic nanomaterials; designing more efficient catalysts; developing new capabilities and uses for electron microscopy; and nanofabrication based on soft and biological nanomaterials—all aided by theory and advanced computation. The CFN building has also been awarded Leadership in Energy and Environmental Design (LEED) Silver certification.



Located within Brookhaven National Laboratory's Center for Functional Nanomaterials, this electron beam lithography writer allows scientists to draw any pattern or design and then transfer that image to silicon, metal or any kind of material. With the "e-beam" tool, scientists can write features down to eight nanometers and over an area as large as several millimeters.

The Laboratory's Research Support Building (RSB) was completed in 2006 and provides administrative and support functions in a single location for employees and visiting scientists. The RSB has been awarded the LEED Silver certification from the U.S. Green Building Council. This award is based on five categories: sustainability, water



BNL's Research Support Building, awarded a LEED silver rating by the U.S. Green Building Council in 2008.

efficiency, energy and atmosphere, materials and resources, and indoor environmental quality.

Construction of a 32-megawatt Long Island Solar Farm (LISF) at BNL was completed in the fall of 2011 in collaboration with BP Solar, Long Island Power Authority, the State of New York, and other organizations. The LISF, when constructed, was the largest solar photo-voltaic (PV) electric generating plant in the eastern United States. Its goal is to help Long Island be less reliant on fossil fuel-driven power generation and to meet peak load demands from summertime air conditioning use. It is generating enough renewable energy to power approximately 4,500 homes and is helping New York State meet its clean energy and carbon reduction goals. The LISF will be one of the most studied solar installations, as it is a focal point of the Northeast Solar Energy Research Center at BNL. Compared to conventional electric-generating facilities on Long Island, the LISF drastically reduces local sources that contribute to climate change, such as reducing the amount of carbon dioxide by 30,950 metric tons per year and methane by 80 metric tons over 40 years.



The LISF, located on the Brookhaven National Laboratory site, began delivering power to the grid in November 2011, and is currently the largest solar photovoltaic power plant in the Eastern United States.

The Interdisciplinary Science Building (ISB), completed in 2013, is an energy-efficient and environmentally sustainable building that provides labs, offices, and support functions to bring together a broad spectrum of researchers, including industry, universities, and other national laboratories. The ISB fosters energy research, focusing on the effective uses of renewable energy through improved conversion, transmission, and storage. The ISB has been awarded LEED Gold certification.





The Interdisciplinary Building (ISB) was awarded a LEED gold rating by the U.S. Green Building Council in 2013


Brookhaven Lab is establishing itself as a global leader in tackling the challenges of Big Data, building on existing expertise, capabilities, and investments in computational science and data management, and enabling scientific discovery in large-scale experimental environments.

Based in the former NSLS-I facility, and established in 2016, the Computational Science Initiative (CSI) oversees the following areas: Computer Science and Applied Mathematics, Computing for National Security, Scientific Data and Computing Center, Computation and Data-Driven Discovery, and the Computational Science Lab. CSI takes a multidisciplinary, collaborative approach to its research, targeting challenges in cooperation with fellow researchers in science, national security, and industry, both at home and abroad.

CSI has long focused on timely analysis and interpretation of high-volume, high-velocity heterogeneous data, providing solutions for the national and international scientific community. These efforts now are being augmented by CSI's growing high-performance computing capabilities.

Today, BNL operates a Blue Gene Q as part of three facilities/collaborations. Researchers in biology, chemistry, physics, and medicine together with applied mathematicians and computer scientists—from Brookhaven, Stony Brook University, Columbia University, and other collaborating institutions—use these and other advanced computing facilities to address questions in computational biology, nanoscience, sustainable energy, environmental science, and homeland security.

While these facilities have set the stage for exciting and world-changing discoveries and innovations

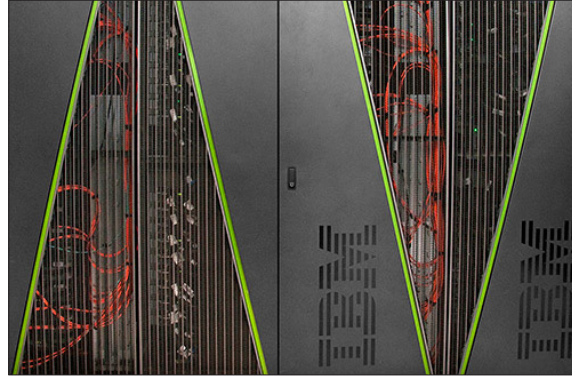

Blue Gene/Q, Computational Science Initiative

over the course of its more than 70-year history, BNL aims to continually improve and innovate its infrastructure. Efforts to improve the face of the Laboratory have been underway for years, by eliminating aging infrastructure and envisioning and constructing sophisticated new facilities.

One such exciting development is Discovery Park, a transformative vision for the Lab's entryway to welcome visitors, provide housing for facility users and guests, and offer new opportunities for private industry to collaborate. It will also provide an opportunity for economic and community development on Long Island, New York State, and beyond. The Discovery Park concept is built upon environmentally responsible development that aligns with the interests of the DOE, Brookhaven Lab, and the regional New York and Long Island economies.

Plans for Discovery Park include Upton Square and a Technology Park, and the Science User Support Center (SUSC), the first building among several planned for Discovery Park. The SUSC



A rendering of the future Science and User Support Center

and Discovery Park, more broadly, will help the Lab reach its mission support goal for a renewed research campus. Additionally, reducing the Lab's building footprint will help minimize costs for overall operations and maintenance. The SUSC will be the only federally funded building in Discovery Park. Other buildings planned for Discovery Park will be funded privately. For more information about Discovery Park, please visit <https://discoverypark.bnl.gov/>.

### 1.4 FACILITIES AND OPERATIONS

Most of the Laboratory's principal facilities are located near the center of the site. The developed area is approximately 1,820 acres consisting of the following:

- 500 acres originally developed by the Army as part of Camp Upton, and still used for offices and other operational buildings
- 200 acres occupied by large, specialized research facilities
- 520 acres used for outlying facilities, such as the STP, ecology field, housing facilities, and fire breaks
- 400 acres of roads, parking lots, and connecting areas
- 200 acres occupied by the LISF

The balance of the site, approximately 3,400 acres, is mostly wooded and represents the native pine barrens ecosystem. The location of the major scientific facilities at BNL are shown on Figure 1-1. Additional facilities, shown on Figure 1-2 and briefly described below, support BNL's science and technology mission by providing basic utility and environmental services.

- *Central Chilled Water Plant*. This plant provides chilled water sitewide for air conditioning and process refrigeration via underground piping. The plant has a large refrigeration capacity and reduces the need for local refrigeration plants and air conditioning.
- *Central Steam Facility (CSF)*. This facility provides high-pressure steam for heating and sitewide processes. Either natural gas or fuel oil can be used to produce the steam, which is conveyed to other facilities through underground piping. Condensate is collected and returned to the CSF for boiler make-up to conserve water and energy.

- *Fire Station*. The Fire Station houses six response vehicles. The BNL Fire Rescue Group provides on-site fire suppression, emergency medical services, hazardous material response, salvage, and property protection.
- *Major Petroleum Facility (MPF)*. This facility provides reserve fuel for the CSF during times of peak operation. With a total capacity of 1.9 million gallons, the MPF primarily stores No. 6 fuel oil and No. 2 oil. The 1997 conversion of CSF boilers to burn natural gas and oil has significantly reduced the Laboratory's reliance on oil as a sole fuel source when other fuels are more economical, and the primary use of natural gas has significantly reduced GHG emissions.
- *Sewage Treatment Plant (STP)*. This plant treats sanitary and certain process wastewater from BNL facilities prior to discharge into groundwater recharge beds, similar to the operations of a municipal sewage treatment plant. The plant has a design capacity of 2.3 million gallons per day. Effluent is monitored and controlled under a permit issued by the New York State Department of Environmental Conservation.
- *Waste Management Facility (WMF)*. This facility is a state-of-the-art complex for managing the wastes generated from BNL's research and operations activities. The facility was built with advanced environmental protection systems and features and began operation in December 1997.
- *Water Treatment Plant (WTP)*. The potable water treatment plant has a capacity of five million gallons per day. Potable water is obtained from four on-site wells. Water pumped from a supply well located in the western section of the site is treated at the WTP to remove naturally occurring iron and then injected with lime to adjust the pH, and with sodium hypochlorite for bacterial control. The plant is also equipped with dual air towers to ensure that volatile organic compounds are at or below New York State drinking water standards. Water from two of the three supply wells located in the eastern section of the developed site is treated by the addition of sodium hydroxide to increase the pH of the water to make it less corrosive and also injected with sodium hypochlorite to control bacteria.





Figure 1-1. Major Scientific Facilities at BNL.

- |   |   |   |
|---|---|---|
| 1. Relativistic Heavy Ion Collider                          | 6. Tandem to Booster                    | 11. Tandem Van de Graaff and Cyclotron    |
| 2. NASA Space Radiation Laboratory                          | 7. Interdisciplinary Science Building   | 12. Accelerator Test Facilities           |
| 3. Alternating Gradient Synchrotron                         | 8. Center for Functional Nanomaterials  | 13. Medical Isotope Research Laboratories |
| 4. Alternating Gradient Synchrotron Booster                 | 9. National Synchrotron Light Source II |   |
| 5. Brookhaven Linac Isotope Producer and Linear Accelerator | 10. Computational Science Initiative    |   |

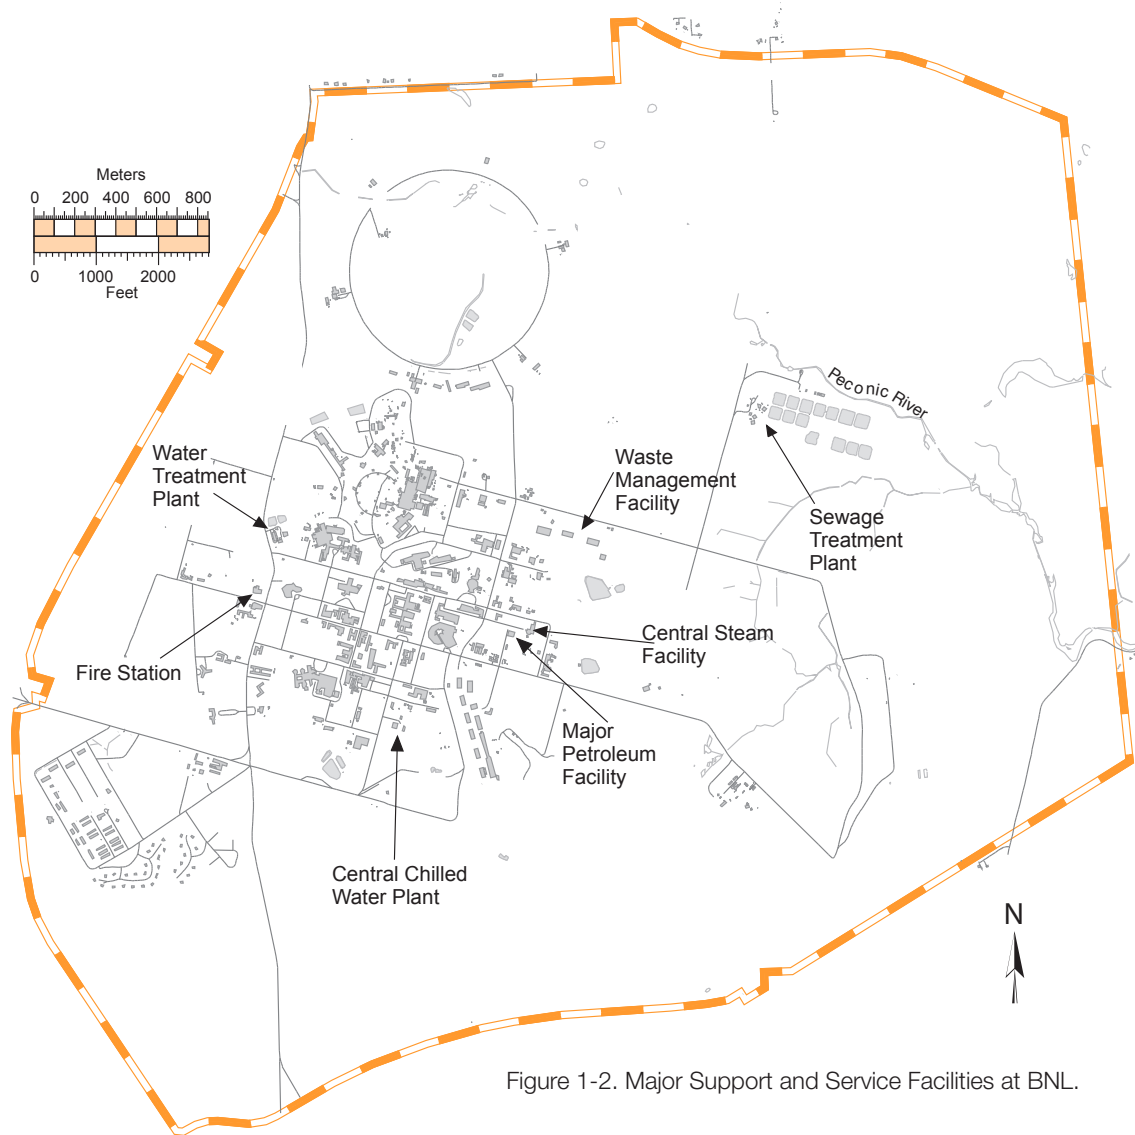


Figure 1-2. Major Support and Service Facilities at BNL.

**1.5 LOCATION, LOCAL POPULATION, AND LOCAL ECONOMY**

Brookhaven Lab is the only national laboratory located in the Northeast and one of New York State’s largest centers of scientific research, and places special emphasis on growing the technology-based elements of the Long Island economy. The future competitiveness of New York’s economy depends on its capacity for innovation, and Brookhaven represents a uniquely valuable resource—both as a major science-based enterprise, and as a source of discoveries that drive entrepreneurs and innovators. BNL is located near the geographical center of Suffolk County, Long Island, New York.

The Laboratory’s 5,265-acre site is located in

Brookhaven Town, approximately 65 miles east of midtown Manhattan. Brookhaven Lab employs 2,609 full-time employees who include scientists, engineers, technicians, and support staff. In addition, the Laboratory annually hosts more than 5,000 visiting scientists, facility users, and students from universities, industries, and government agencies, who often stay in apartments and dormitories onsite or in nearby communities.

BNL strengthens Long Island’s position as a center of innovation in energy, materials sciences, nanotechnology, and other fields crucial to the growth of New York State’s economy. With a fiscal year 2021 budget of \$720 million, the Lab has a significant economic impact on New York State. In 2021,



Lab employee salaries, wages, and fringe benefits accounted for approximately \$426 million, or 59 percent of its total budget. Supporting local and state businesses whenever possible, the Lab spent \$65,376,574 in New York State and \$46,403,866 in Nassau and Suffolk counties, respectively.



Aerial, Brookhaven Lab, 2013

## 1.6 GEOLOGY AND HYDROLOGY

BNL is situated on the western rim of the shallow Peconic River watershed. The marshy areas in the northern and eastern sections of the site are part of the headwaters of the Peconic River. Depending on the height of the water table relative to the base of the riverbed, the Peconic River both recharges to and receives water from the underlying Upper Glacial aquifer. In times of sustained drought, the river water recharges to the groundwater; with normal to above-normal precipitation, the river receives water from the aquifer.

The terrain of the BNL site is gently rolling, with elevations varying between 44 and 120 feet above mean sea level. Depth to groundwater from the land surface ranges from five feet near the Peconic River to approximately 80 feet in the higher elevations of the central and western portions of the site. Studies of Long Island hydrology and geology near the Laboratory indicate that the uppermost Pleistocene deposits, composed of highly permeable glacial sands and gravel, are between 120 and 250 feet thick (Warren et al., 1968; Scorca et al., 1999).

Water penetrates these deposits readily and there is little direct runoff into surface streams unless precipitation is intense. The sandy deposits store large quantities of water in the Upper

Glacial aquifer. On average, approximately half of the annual precipitation is lost to the atmosphere through evapotranspiration, and the other half percolates through the soil to recharge the groundwater (Franke & McClymonds, 1972; Aronson & Seaburn, 1974).

The Long Island Regional Planning Board and Suffolk County have identified the Laboratory site as overlying a deep-flow recharge zone for Long Island groundwater (Koppelman, 1978). Precipitation and surface water that recharge within this zone have the potential to replenish the Magothy and Lloyd aquifer systems lying below the Upper Glacial aquifer. It has been estimated that up to two-fifths of the recharge from rainfall moves into the deeper aquifers. The extent to which groundwater on site contributes to deep-flow recharge has been confirmed using an extensive network of shallow and deep wells installed at BNL and surrounding areas (Geraghty & Miller, 1996). This groundwater system is the primary source of drinking water for both on- and off-site private and public supply wells and has been designated a sole source aquifer system by the U.S. Environmental Protection Agency.

The Laboratory's five in-service drinking water wells draw up to 1,000 gallons per minute, or approximately 1.34 million gallons of water per day, from the aquifer to supply drinking water, process cooling water, or fire protection. This water is treated to remove contaminants and is then returned to the aquifer by way of recharge basins or injection wells. In 2021, BNL pumped approximately 340 million gallons of water.

Groundwater flow directions across the BNL site are influenced by natural drainage systems: eastward along the Peconic River, southeast toward the Forge River, and south toward the Carmans River (Figure 1-3). Pumping from on-site supply wells affects the direction and speed of groundwater flow, especially in the central, developed areas of the site. The main groundwater divide on Long Island is aligned generally east-west and lies approximately one-half mile north of the Laboratory. Groundwater north of the divide flows northward and ultimately discharges to the Long Island Sound. Groundwater south of the divide flows east and south, discharging to the Peconic River, Peconic Bay, south shore streams, Great South Bay, and Atlantic Ocean. The

## CHAPTER 1: INTRODUCTION

regional groundwater flow system is discussed in greater detail in Stratigraphy and Hydrologic Conditions at the Brookhaven National Laboratory and Vicinity, Suffolk County, New York, 1994-97 (Scorca et al., 1999).

In most areas at BNL, the horizontal velocity of groundwater is approximately 0.75 to 1.2 feet per day (Geraghty & Miller, 1996). In general, this means that groundwater travels for approximately 20 to 22 years as it moves from the central, developed area of the site to the Laboratory's southern boundary.

### 1.7 CLIMATE

Meteorological Services (MET Services) at BNL has been recording on-site weather data since August 1948. MET Services is responsible for

the maintenance, calibration, data collection, and data archiving for the weather instrumentation network at BNL. Measurements include wind speed, wind direction, temperature, rain fall, barometric pressure, and relative humidity.

The Laboratory is broadly influenced by continental and maritime weather systems. Locally, the Long Island Sound, Atlantic Ocean, and associated bays influence wind directions and humidity and provide a moderating influence on extreme summer and winter temperatures.

The prevailing ground-level winds at BNL are from the southwest during the summer, from the northwest during the winter, and about equally from those two directions during the spring and fall (Nagle 1975, 1978). Figure 1-4 shows the 2021 annual wind rose for BNL, which depicts



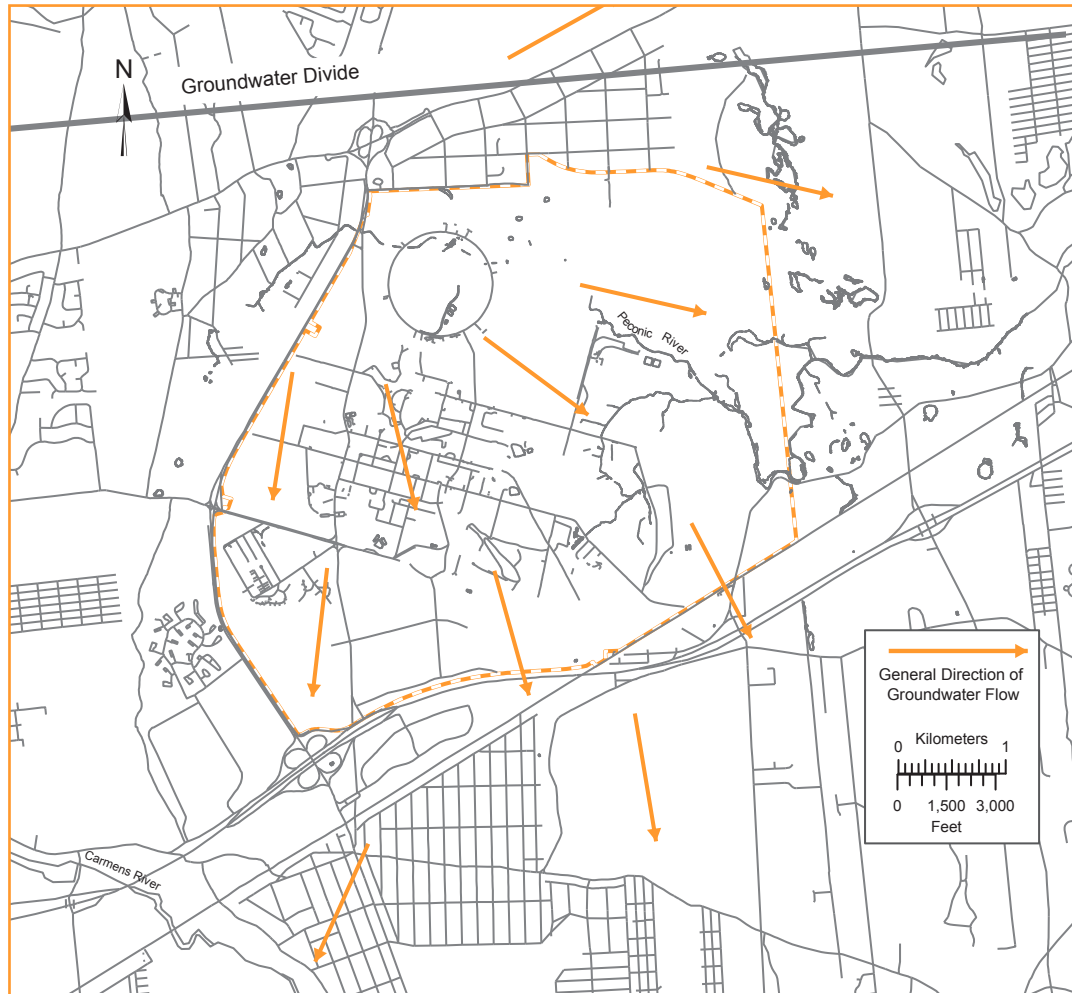


Figure 1-3. BNL Groundwater Flow Map.



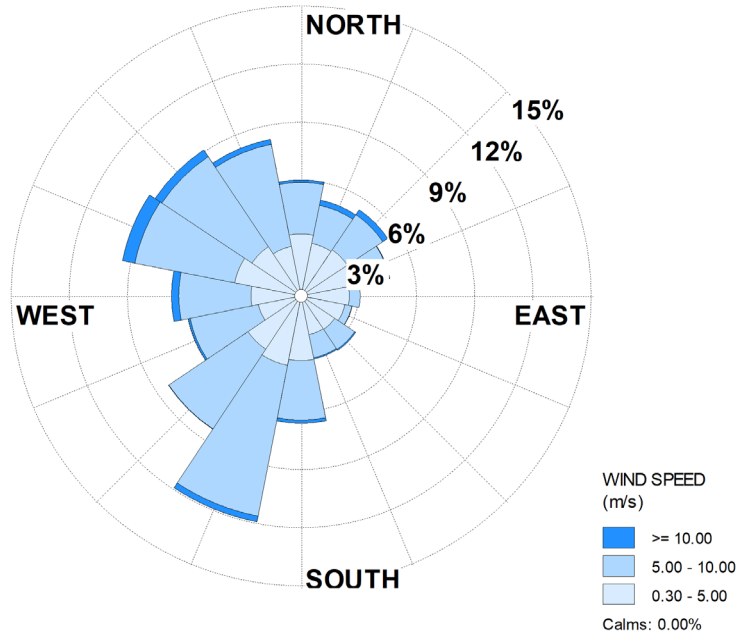

Wind Rose for Jan. 1 to Dec. 31, 2021 taken at the 85m height

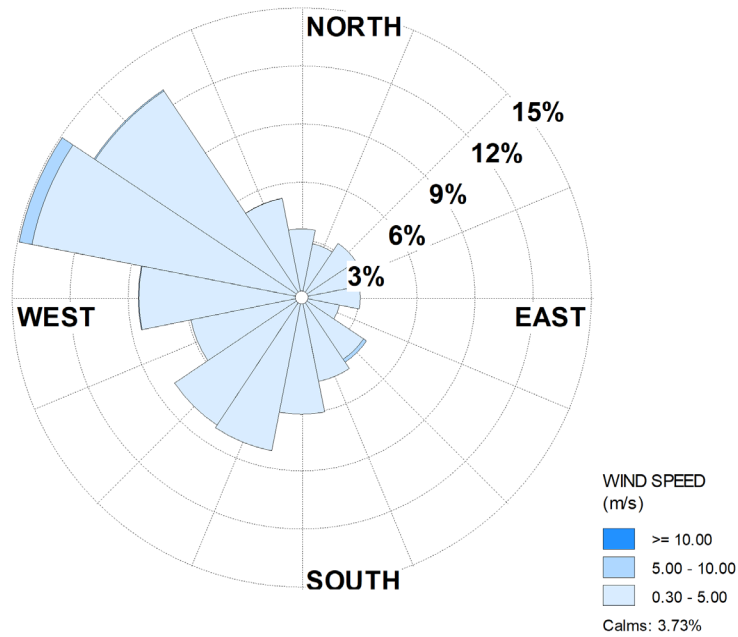

Wind Rose for Jan. 1 to Dec. 31, 2021 taken at the 10m height

Explanation: Wind direction was measured at heights of 10 (bottom) and 85 (top) meters above the ground. The readings were plotted on the charts to indicate how often wind came from each direction. The concentric circles represent multi-percentage increases in the frequency. For example, at 10 meters above the ground, wind was from due south seven percent of the time. The predominant wind direction in 2021 was from the northwest at the 10-m level and from the southwest at the 85-m level.

Figure 1-4. BNL Wind Rose (2021).

## CHAPTER 1: INTRODUCTION

the annual frequency distribution of wind speed and direction, measured at an on-site meteorological tower at heights of 33 feet (10 meters) and 300 feet (85 meters) above land surface.

In 2021, the average yearly temperature for this area of Long Island was 52.9°F. The coolest month of the year, January, had a monthly average temperature of 31.1°F while the warmest month of the year, August, had a monthly average temperature of 73.8°F. Figures 1-5 and 1-6 show the 2021 monthly mean temperatures and the historical annual mean temperatures, respectively. The total annual precipitation in 2021 was 49 inches.

Figures 1-7 and 1-8 show the 2021 monthly and the 70-year annual precipitation data, respectively. The yearly total snowfall for 2021 was 30.8 inches, slightly below the 33.0 inches average yearly snowfall for this area of Long Island.

### 1.8 NATURAL RESOURCES

The Laboratory is located in the oak and chestnut forest region of the Coastal Plain and constitutes about five percent of the 100,000-acre New York State-designated region on Long Island known as the Central Pine Barrens. The section of the Peconic River running through BNL is designated as “scenic” under the New York State Wild, Scenic, and Recreational River System Act of 1972. Due to the general topography and porous soil, the land is very well drained and there is little surface runoff or open standing water. However, depressions form numerous small, pocket wetlands with standing water on a seasonal basis (vernal pools), and there are six regulated wetlands on site. Thus, a mosaic of wet and dry areas correlate with variations in topography and depth to the water table.

Vegetation on site is in various stages of succession, which reflects a history of disturbances to the area. For example, when Camp Upton was constructed in 1917, the site was entirely cleared of its native pines and oaks. Although portions of the site were replanted in the 1930s, portions were cleared again in 1940 when Camp Upton was reactivated by the U.S. Army. Other past disturbances include fire, local flooding, and draining. Current operations minimize disturbances to the undeveloped areas of the site.

More than 350 plant, 30 mammal, 131 bird, 13 amphibian, 12 reptile, and ten fish species have

been identified on site, some of which are New York State threatened, endangered, exploitably vulnerable, and species of special concern. To eliminate or minimize any negative effects that BNL operations might cause to these species, precautions are in place to protect habitats and natural resources at the Laboratory.



Eastern black swallowtail butterfly (*Papilio polyxenes*) photographed on the campus of Brookhaven National Lab.

In November 2000, DOE established the Upton Ecological and Research Reserve at BNL. The 530-acre Upton Reserve (ten percent of the Laboratory’s property) is on the eastern portion of the site, in the Core Preservation Area of the Central Pine Barrens. The Upton Reserve creates a unique ecosystem of forests and wetlands that provides habitats for plants, mammals, birds, reptiles, and amphibians. From 2000 to 2004, funding provided by DOE under an Inter-Agency Agreement between DOE and the U.S. Fish & Wildlife Services was used to conduct resource management programs for the conservation, enhancement, and restoration of wildlife and habitat in the reserve. Management of the Upton Reserve falls within the scope of BNL’s Natural Resource Management Plan, and the area will continue to be managed for its key ecological values and as an area for ecological research (BNL 2016).

Additional information regarding the Upton Reserve and the Laboratory’s natural resources can be found in Chapter 6 of this report.

### 1.9 CULTURAL RESOURCES

The Laboratory is responsible for ensuring compliance with historic preservation requirements. BNL’s Cultural Resource Management

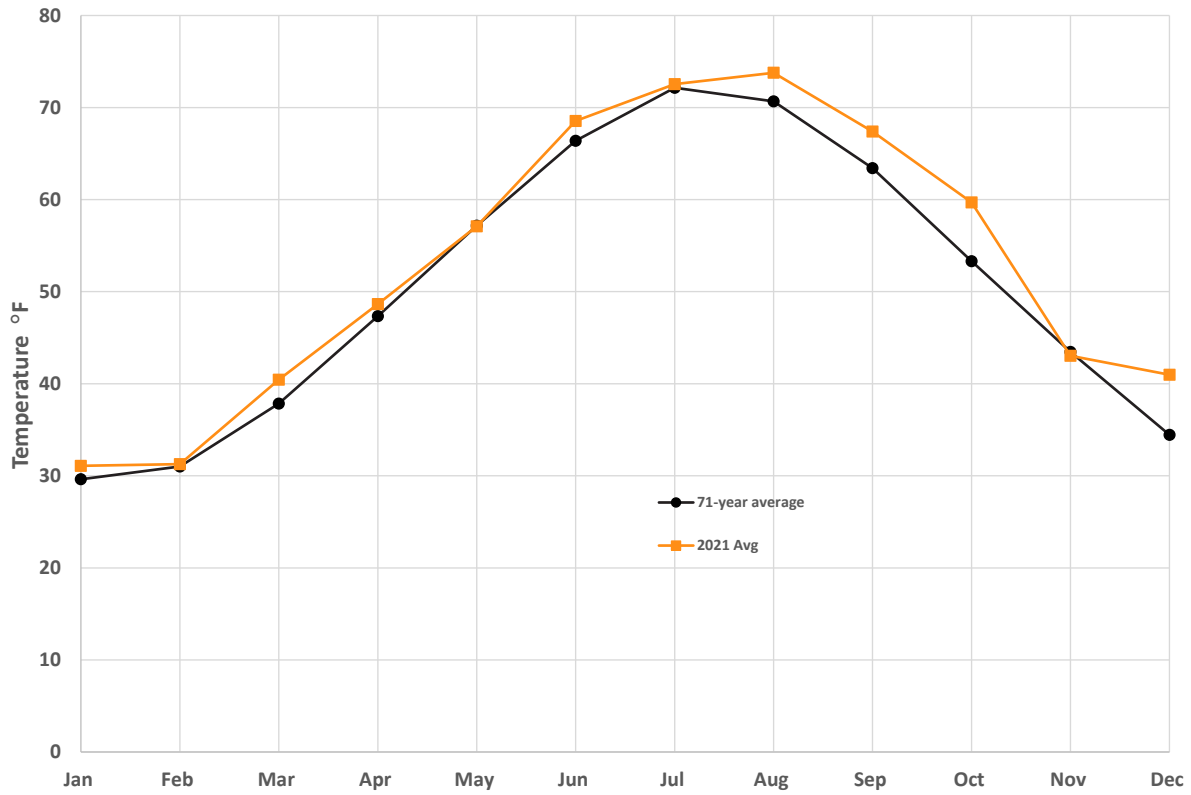


Figure 1-5. BNL 2021 Monthly Mean Temperature versus 71-Year Monthly Average.

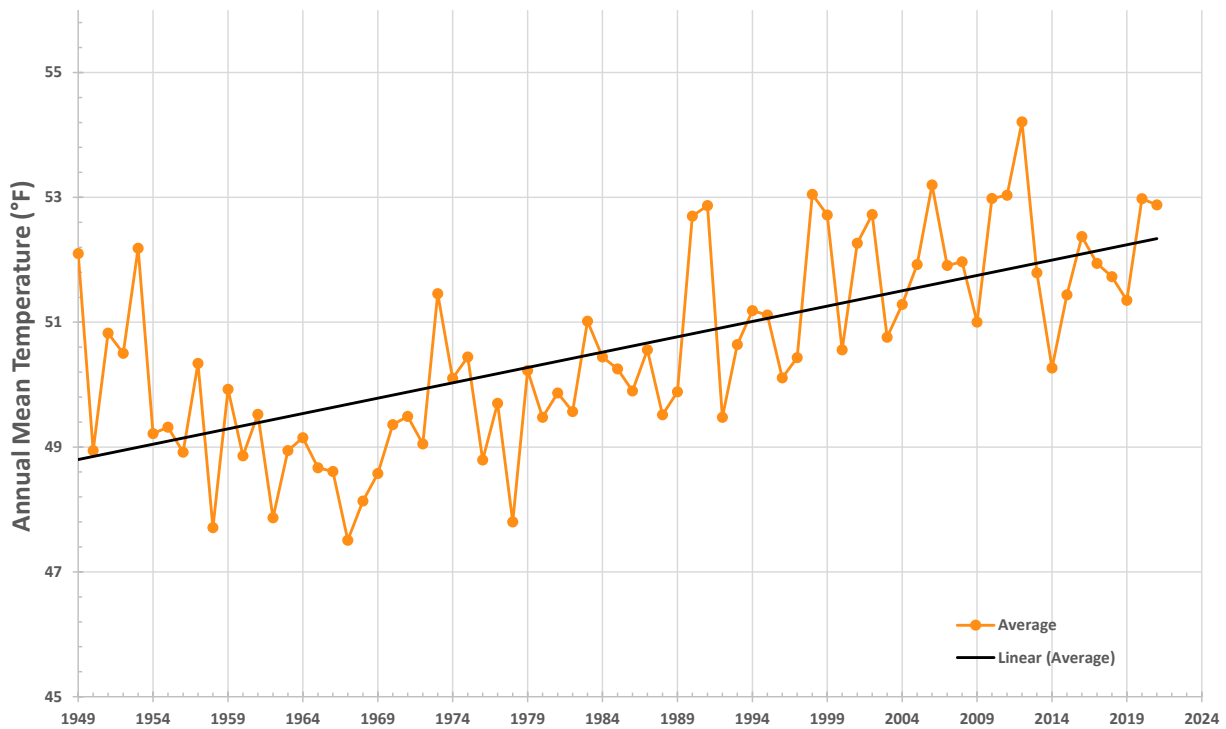


Figure 1-6. BNL 2021 Annual Mean Temperature Trend (71 Years).

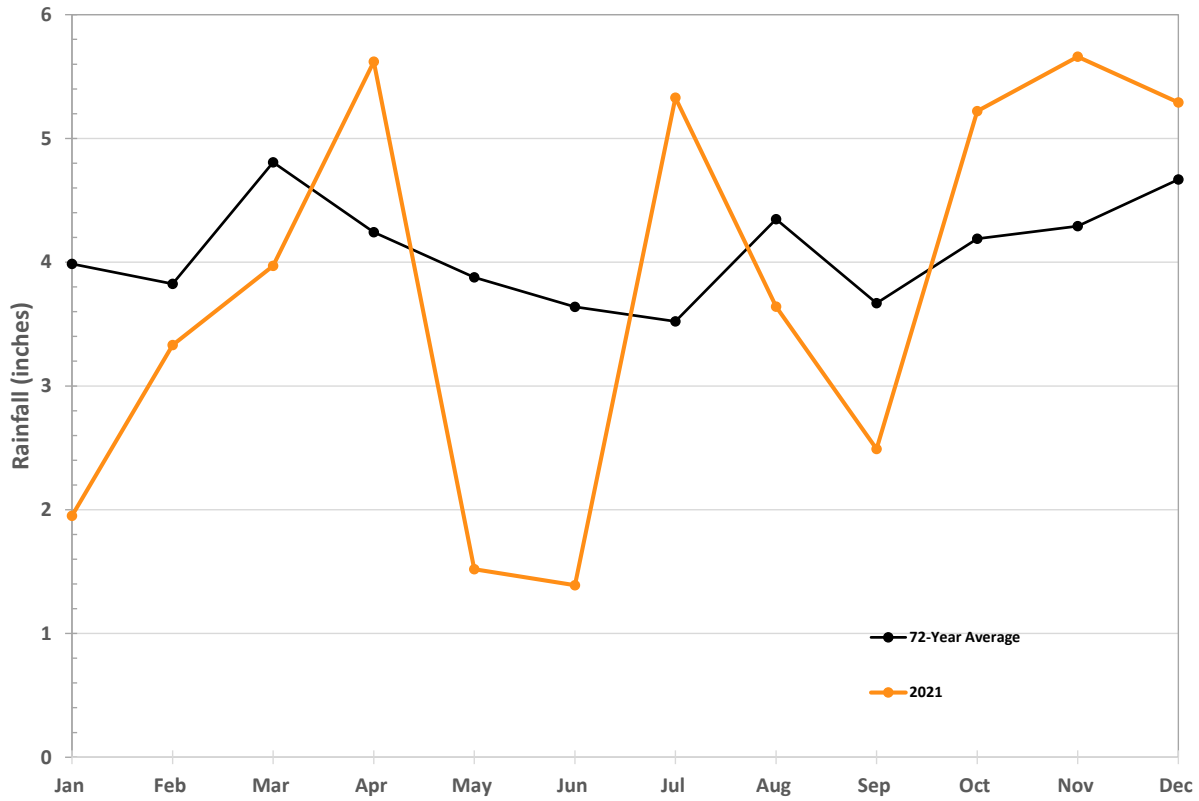


Figure 1-7. BNL 2021 Monthly Precipitation versus 71-Year Monthly Average.

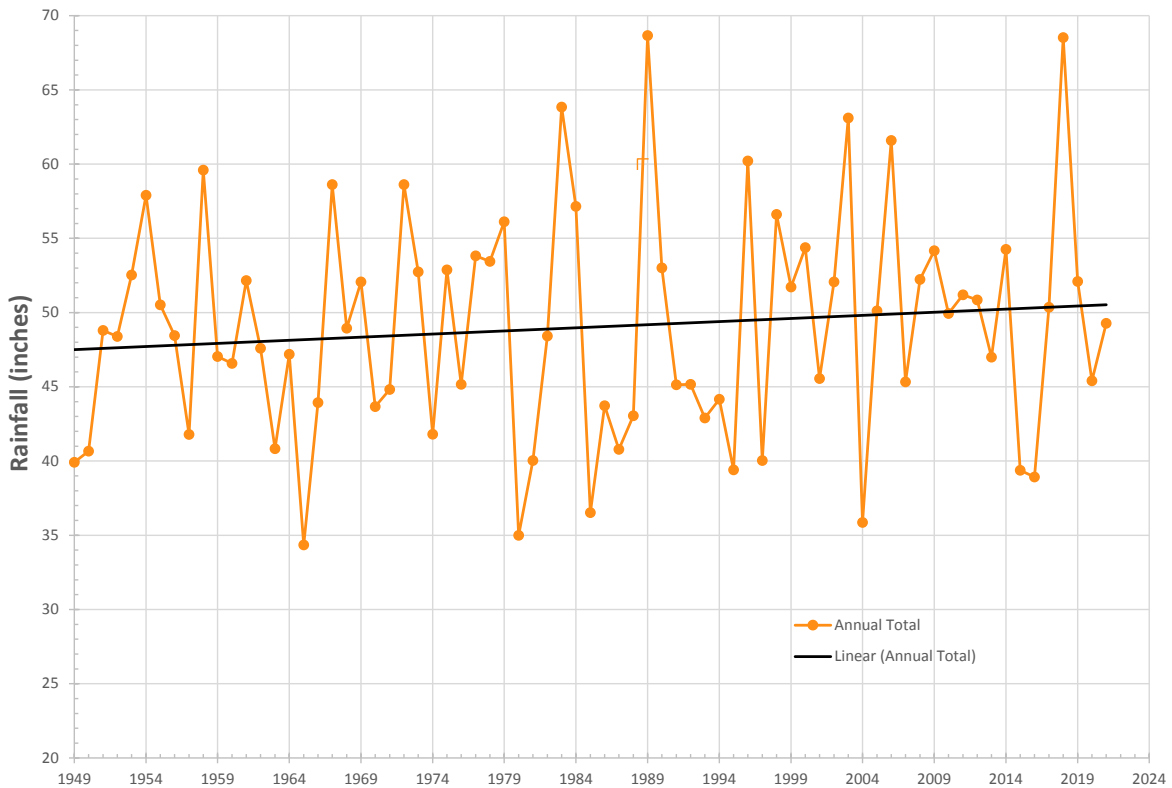


Figure 1-8. BNL 2021 Annual Precipitation Trend (71 Years).

Plan was developed to identify, assess, and document the Laboratory's historic and cultural resources (BNL 2013). These resources include World War I trenches; Civilian Conservation Corps features; World War II buildings; and historic structures, programs, and discoveries associated with high-energy physics, research reactors, and other science conducted at BNL. The Laboratory currently has multiple facilities classified as eligible for listing on the National Register of Historic Places, including numerous buildings and facility complexes, and the World War I training trenches associated with Camp Upton. Further information can be found in Chapter 6.



BNL was once the site of the U.S. Army's Camp Upton, which was active from 1917 until 1920, and again from 1940 until 1946. The Army was later to use the site as a convalescent and rehabilitation hospital for wounded veterans returning after World War II.

## REFERENCES AND BIBLIOGRAPHY

- Aronson, D.A. and Seaburn, G.E. 1974. Appraisal of the operating efficiency of recharge basins on Long Island, NY in 1969. USGS Water Supply Paper 2001-D.
- BNL. 2013. Cultural Resource Management Plan for Brookhaven National Laboratory. BNL-73839-2005. Brookhaven National Laboratory, Upton, NY.
- BNL. 2021. Natural Resource Management Plan for Brookhaven National Laboratory. BNL-112669-2021. Brookhaven National Laboratory, Upton, NY.
- DOE Order 231.1B. 2011. Environment, Safety and Health Reporting. U.S. Department of Energy, Washington, DC. June 27, 2011.
- Franke, O.L. and McClymonds, P. 1972. Summary of the hydrogeologic situation on Long Island, NY, as a guide to water management alternatives. USGS Professional Paper 627-F.
- Geraghty and Miller, Inc. 1996. Regional Groundwater Model, Brookhaven National Laboratory, Upton, New York. A Report to Brookhaven National Laboratory. November 1996.
- Koppelman, L.E. 1978. The Long Island Comprehensive Waste Treatment Management Plan (Long Island 208 Study), Vol. I and II. Long Island Regional Planning Board, Hauppauge, NY. July 1978.
- Nagle, C.M. 1975. Climatology of Brookhaven National Laboratory: 1949–1973. BNL-50466. Brookhaven National Laboratory, Upton, NY. November 1975.
- Nagle, C.M. 1978. Climatology of Brookhaven National Laboratory: 1974–1977. BNL-50857. Brookhaven National Laboratory, Upton, NY. May 1978.
- NYCRR. Title 27. Wild, Scenic, and Recreational River Systems Act. Article 15 and subsequent updates. New York State Department of Environmental Conservation, Albany, NY.
- Scorca, M.P., W.R. Dorsch, and D.E. Paquette. 1999. Stratigraphy and Hydrologic Conditions at the Brookhaven National Laboratory and Vicinity, Suffolk County, New York, 1994–97. U.S. Geological Survey Water Resources Investigations Report 99-4086. 55 pp.
- Warren, M.A., W. deLaguna, and N.J. Lusczynski. 1968. Hydrology of Brookhaven National Laboratory and Vicinity, Suffolk County, New York. U.S. Geological Survey Bulletin, 1156-C.



*Intentionally Left Blank*

# Environmental Management System

---

# 2

Brookhaven Science Associates (BSA), the contractor operating the Laboratory on behalf of the Department of Energy (DOE), takes environmental stewardship very seriously. As part of its commitment to environmentally responsible operations, BSA has established the Brookhaven National Lab (BNL) Environmental Management System (EMS). An EMS ensures that environmental issues are systematically identified, controlled, and monitored. Moreover, an EMS provides mechanisms for responding to changing environmental conditions and requirements, reporting on environmental performance, and reinforcing continual improvement.

The Laboratory's EMS was designed to meet the rigorous requirements of the globally recognized International Organization for Standardization (ISO) 14001 Environmental Management Standard, which encompasses ideals such as compliance, pollution prevention, and community involvement. Annual audits by an independent third party are required to maintain an EMS registration; an audit of the entire EMS occurs every three years. In 2021, an EMS certification audit recertified BNL's continued conformance to the ISO 14001 Standard.

BNL documents its efforts to implement sustainable business practices into infrastructure and operations in its Site Sustainability Plan (SSP). The areas of focus are energy and water conservation, waste reduction, recycling, purchase of environmentally friendly products, greenhouse gas management, and other adaptation and resilience planning. Future objectives are expected to include net-zero carbon-free emission goals in line with larger DOE plans to address the impacts from climate change.

The Laboratory continues its strong support of its Pollution Prevention Program, which seeks ways to eliminate waste and toxic materials on site, but also to promote sustainable business activities. The program generates new ideas to grow the Lab's existing recycling program or otherwise improve sustainable operations. In 2021, the Pollution Prevention Program resulted in nearly \$1.5 million in cost avoidance or savings and resulted in the reduction or reuse of approximately 2.8 million pounds of waste. Also, the Pollution Prevention Program funded seven new proposals, investing approximately \$14,000. The proposals involved reducing risk, promoting use of bio-friendly alternative products, improving small energy efficiency projects, and promoting overall environmentally sustainable business practices. Fewer proposals were able to be completed this year due to impact on available internal labor for equipment installations and impact on staff overall because of the COVID-19 pandemic.

The ISO 14001-registered EMS and Pollution Prevention Program continued to contribute to the Laboratory's success in improving sustainable operations. Support was also provided in 2021 to line organizations for lab cleanouts and disposal of chemicals. As a testament to its strong environmental program, the Lab received the Green Electronics Council's Electronic Product Environmental Assessment Tool (EPEAT) Gold Award, the DOE's GreenBuy Award, and a second GreenBuy Superior Award.

BNL continues to address legacy environmental issues and openly communicates with neighbors, regulators, employees, and other interested parties on environmental issues and cleanup progress on site. Even during the challenges that the COVID-19 pandemic posed, BNL was successful in maintaining a high level of communication and interaction with the community, regulators, and employees. This was accomplished through virtual meetings of the Community Advisory Committee, Brookhaven Executive Roundtable, virtual tours, a reenergized virtual speakers bureau, and monthly interagency calls with regulators. BNL is committed to transparency and open communication with its internal and external stakeholders.

## 2.1 INTEGRATED SAFETY MANAGEMENT AND ISO 14001

The Laboratory's Integrated Safety Management System (ISMS) integrates environmental protection, pollution prevention, safety, health, and quality (ESH&Q) management into all work planning and execution. The purpose of BNL's ISMS is to ensure that the way we work integrates DOE's five Core Functions and seven Guiding Principles into all work processes. The five Core Functions, as defined by DOE P 450.4, Safety Management System Policy, are:

- *Define the scope of work:* Missions are translated into work, expectations are set, tasks are identified and prioritized, and resources are allocated.
- *Analyze the hazards:* Hazards associated with the work are identified, analyzed, and categorized.
- *Develop and implement hazard controls:* Applicable standards and requirements are identified and agreed-upon; controls to prevent/mitigate hazards are identified; the safety envelope is established; and controls are implemented.
- *Perform work within controls:* Readiness is confirmed, and work is performed safely.
- *Provide feedback and continuous improvement:* Feedback information on the adequacy of controls is gathered; opportunities for improving the definition and planning of work are identified and implemented.

The seven Guiding Principles, also as defined by DOE P 450.4, are:

- *Line management responsibility for safety:* Line management is directly responsible for the protection of the workers, the public, and the environment.
- *Clear roles and responsibilities:* Clear and unambiguous lines of authority and responsibility for ensuring safety are established and maintained at all organizational levels within the Department and its contractors.
- *Competence commensurate with responsibilities:* Personnel possess the experience, knowledge, skills, and abilities that are necessary to discharge their responsibilities.
- *Balanced priorities:* Resources are effectively allocated to address safety, programmatic,

and operational considerations. Protecting the workers, the public, and the environment is a priority whenever activities are planned and performed.

- *Identification of safety standards and requirements:* Before work is performed, the associated hazards are evaluated and an agreed-upon set of safety standards and requirements is established which, if properly implemented, will provide adequate assurance that the workers, public, and environment are protected from adverse consequences.
- *Hazard controls tailored to work being performed:* Administrative and engineering controls to prevent and mitigate hazards shall be tailored to the work being performed and associated hazards.
- *Operations authorization:* The conditions and requirements to be satisfied for operations to be initiated and conducted shall be clearly established and agreed upon.

The integrated processes within ISMS contributed to BNL achieving ISO 14001 registration. The ISO 14001 Standard is globally recognized and defines the structure of an organization's EMS for purposes of improving environmental performance. The process-based structure of the ISO 14001 Standard is based on the "Plan-Do-Check-Act" improvement cycle. The ISO 14001 standard requires an organization to develop a policy, create plans to implement the policy, implement the plans, check progress and take corrective actions, and review the system periodically to ensure its continuing suitability, adequacy, and effectiveness.

The Laboratory has been officially registered to the ISO 14001 Standard since 2001. The Laboratory was the first DOE Office of Science Laboratory to achieve this registration. The certification requires the Laboratory to undergo annual audits by an accredited, third-party registrar to assure that the system is maintained. BNL's external certification organization, ERM Certification Verification Services, conducted an external certification audit of BNL's conformance to the ISO 14001 Standard in July 2021. The certification audit identified one nonconformance regarding the independence of the Internal Assessment, but determined that the Laboratory was in full conformance to the Standard

and, therefore, reissued BNL's certification to the standard on September 22, 2021.

## 2.2 ENVIRONMENTAL, SAFETY, SECURITY, AND HEALTH POLICY

The cornerstone of an EMS is a commitment to environmental protection at the highest levels of an organization. BNL's environmental commitments are incorporated into a comprehensive Environmental, Safety, Security, and Health (ESSH) Policy. The policy was reviewed and revised during 2021, reissued, and signed by the Laboratory Director. It states the Laboratory's commitment to environmental stewardship, the safety of the public and BNL employees, and the security of the site with minor revisions reflecting a stronger emphasis on sustainability in addition to compliance. The policy continues as a statement of the Laboratory's intentions and principles regarding overall environmental performance. It provides a framework for planning and action and is included in employee, guest, and contractor training programs. The ESSH Policy is posted throughout the Laboratory and on the BNL website at <http://www.bnl.gov/esh/policy.php>. The Policy's goals and commitments focus on compliance, pollution prevention, community outreach, and continual improvement:

- *Environment:* We protect the environment, conserve resources, and implement sustainable business practices that protect our future.
- *Safety:* We maintain a safe workplace. We plan our work and perform it safely. We take responsibility for the safety of ourselves, coworkers, and guests.
- *Security:* We protect people, property, information, computing systems, and facilities.
- *Health:* We protect human health within our boundaries and in the surrounding community.
- *Compliance:* We achieve and maintain compliance with applicable ESSH requirements.
- *Community:* We maintain open, proactive, and constructive relationships with our employees, neighbors, regulators, the U.S. Department of Energy, and other stakeholders.
- *Continual Improvement:* We continually improve ESSH performance.

## Environmental, Safety, Security, and Health Policy



This document is a statement of Brookhaven National Laboratory's Environmental, Safety, Security, and Health (ESSH) policy. Brookhaven Lab is a world leader in scientific research and performs this work in an environmentally responsible, safe, and secure manner.

I expect every employee, contractor, and guest to take personal responsibility for adhering to the following principles:

<b>Environment</b>	We protect the environment, conserve resources, and implement sustainable business practices that protect our future.
<b>Safety</b>	We maintain a safe workplace. We plan our work and perform it safely. We take responsibility for the safety of ourselves, coworkers, and guests.
<b>Security</b>	We protect people, property, information, computing systems, and facilities.
<b>Health</b>	We protect human health within our boundaries and in the surrounding community.
<b>Compliance</b>	We achieve and maintain compliance with applicable ESSH requirements.
<b>Community</b>	We maintain open, proactive, and constructive relationships with our employees, neighbors, regulators, the U.S. Department of Energy, and other stakeholders.
<b>Continual Improvement</b>	We continually improve ESSH performance.

In addition to my annual review of Brookhaven Lab's progress on ESSH goals and adherence to this policy, I invite all interested parties to provide me with input on our performance relative to this policy, and the policy itself.

Signed   
Doon Gibbs, Director

October 13, 2021



## 2.3 PLANNING

The planning requirements of the ISO 14001 Standard require BNL to identify the environmental aspects and impacts of its activities, products, and services; evaluate applicable compliance obligations; establish objectives and targets; create action plans to achieve the objectives and targets; and identify and address risks and opportunities that can impact the success of the EMS.

### 2.3.1 Environmental Aspects

An "environmental aspect" is any element of an organization's activities, products, and services that can impact the environment. As required by the ISO 14001 Standard, BNL evaluates its operations, identifies the aspects that can impact the environment, and determines which of those impacts are significant. The Laboratory's criteria for significance are based on actual and perceived impacts of its operations and on regulatory requirements. BNL uses its work planning process to identify and review environmental aspects



associated with activities. A Process Assessment Procedure is used for facilities and equipment or for deeper analysis of activities not sufficiently covered by work planning. Evaluations are documented on work plans and Process Assessment Forms (PAFs).

Environmental professionals work closely with Laboratory personnel to ensure that work plans, PAFs, and other related reviews thoroughly capture all aspects, requirements, and associated environmental controls. Aspects and impacts are evaluated annually to ensure that they continue to reflect stakeholder concerns and changes in regulatory requirements.

### 2.3.2 Compliance Obligations

To implement the compliance commitments of the ESSH Policy and meet its compliance obligations, BNL has systems in place to review changes in federal, state, or local environmental regulations and communicate those changes to affected staff. Laboratory-wide procedures for documenting these reviews and recording the actions required to ensure compliance are available to all staff through BNL's web-based Standards-Based Management System (SBMS) subject areas.

BNL follows DOE Order 436.1, Departmental Sustainability. This order has historically been based on Federal Executive Orders that establish goals for federal agencies with a focus on sustainability initiatives that save money and increase efficiency across the government with guidance, recommendations, plans, and numerical targets. DOE 436.1 provides requirements and responsibilities for managing sustainability within DOE to ensure facilities are working towards sustainability goals established in its Strategic Sustainability Performance Plan (SSPP) pursuant to the most recent Executive Order (EO) 13834, Efficient Federal Operations (May 2018). However, EO 13834 was partially revoked by EO 13990, Protecting Public Health and the Environment and Restoring Science to Tackle the Climate Crisis (January 20, 2021). This temporarily eliminated Federal-level sustainability goals, although DOE maintained Departmental-level sustainability goals in the DOE 2020 Sustainability Report and Implementation Plan. On December 8, 2021, EO 13834 was revoked in its entirety by EO 14057, Catalyzing

Clean Energy Industries and Jobs Through Federal Sustainability, which set new Federal-level sustainability goals. All of the goals related to the new executive orders are consolidated in the Federal Sustainability Plan ([www.sustainability.gov/federalsustainabilityplan/](http://www.sustainability.gov/federalsustainabilityplan/)). Each DOE facility is required to have a SSP in place detailing the strategy for achieving these long-term goals and due dates and to provide an annual status. The requirements influence the future of the Laboratory's EMS program and have been incorporated into BNL's SSP, which can be found in Appendix E and identifies the DOE SSP goals, the Laboratory's performance in 2021, and future planned actions and contributions.

### 2.3.3 Objectives and Targets

The establishment of environmental objectives and targets is accomplished through a Performance-Based Management System. This system is designed to develop, align, balance, and implement the Laboratory's strategic objectives, including environmental objectives. The system drives BNL's improvement agenda by establishing a prioritized set of key objectives, called the Performance Evaluation Management Plan (PEMP). BSA works closely with DOE to clearly define expectations and performance measures. Factors for selecting environmental priorities include:

- Meeting the intent and goals of relevant executive orders or other requirements;
- Significant environmental aspects;
- Risk and vulnerability (primarily, threat to the environment);
- Compliance obligations (e.g., laws, regulations, permits, enforcement actions, and memorandums of agreement);
- Commitments in the ESSH Policy to regulatory agencies and to the public;
- Importance to DOE, the public, employees, and other stakeholders.

Laboratory-level objectives and targets are developed on a fiscal year (FY) schedule. For FY 2021, BNL's environmental objectives included addressing emerging contaminants in drinking water, supporting the Lab's scientific mission by providing environmental support to significant research projects, addressing discharge compliance issues connected to cleaning and maintaining cooling


water systems treated for the legionella bacterium as directed by New York State, maintaining ISO 14001 certification and the Laboratory’s performance in purchasing environmentally preferable items, and reducing the overall hazard footprint by reducing chemical inventories.

**2.3.4 Environmental Management Programs**


The Environmental Protection Division (EPD) takes on the largest role for developing action plans for implementing institutional environmental priorities, while other organizations within BNL develop action plans as applicable to their operations. The plans detail how the organization will achieve its environmental objectives and targets, as well as commit the resources necessary to successfully implement both Laboratory-wide and facility-specific programs. BNL has a budgeting system designed to ensure that priorities are balanced and provide resources essential to the implementation and control of the EMS. The Laboratory continues to review, develop, and fund important environmental programs to further integrate environmental stewardship into all facets of its missions.

**2.3.4.1 Compliance**


BNL has an extensive program to ensure that the Laboratory remains in full compliance with all applicable environmental regulatory requirements and permits. Legislated compliance is outlined by the Clean Air Act, National

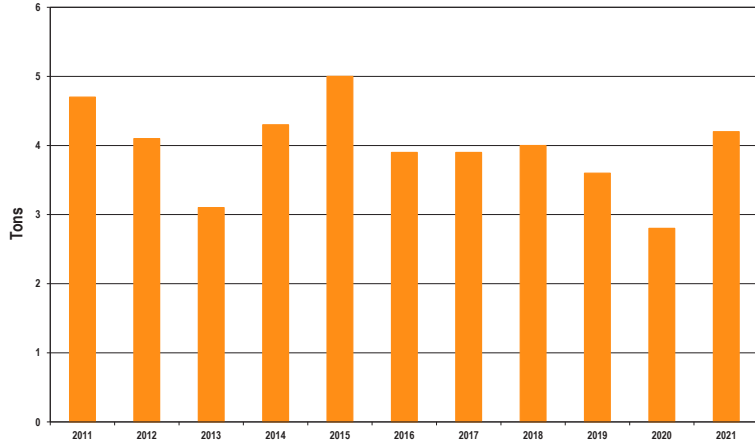

**Figure 2-1a. Hazardous Waste Generation from Routine Operations, 2011 – 2021.**

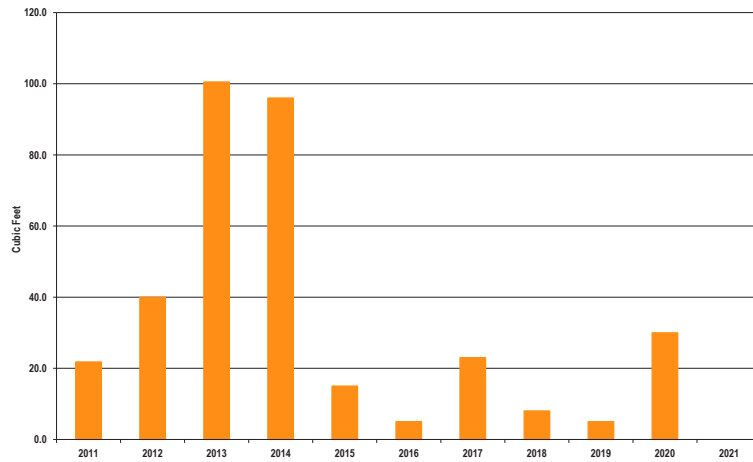


**Figure 2-1b. Mixed Waste Generation from Routine Operations, 2011 – 2021.**

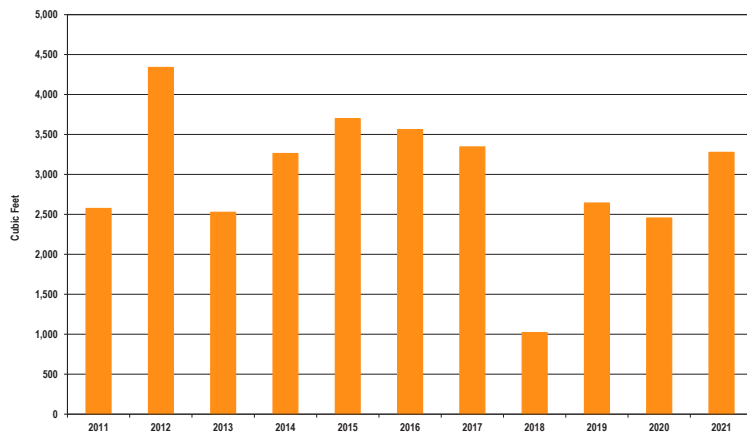


**Figure 2-1c. Radioactive Waste Generation from Routine Operations, 2011 – 2021.**


CHAPTER 2: ENVIRONMENTAL MANAGEMENT SYSTEM

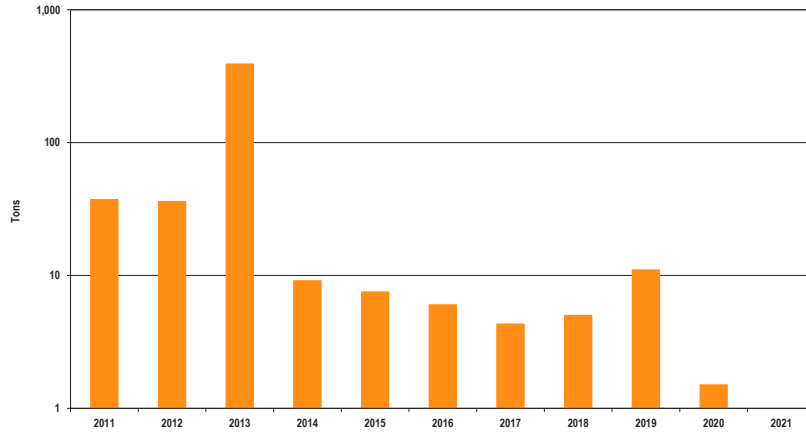

**Figure 2-1d. Hazardous Waste Generation from ER and Nonroutine Operations, 2011 – 2021.**

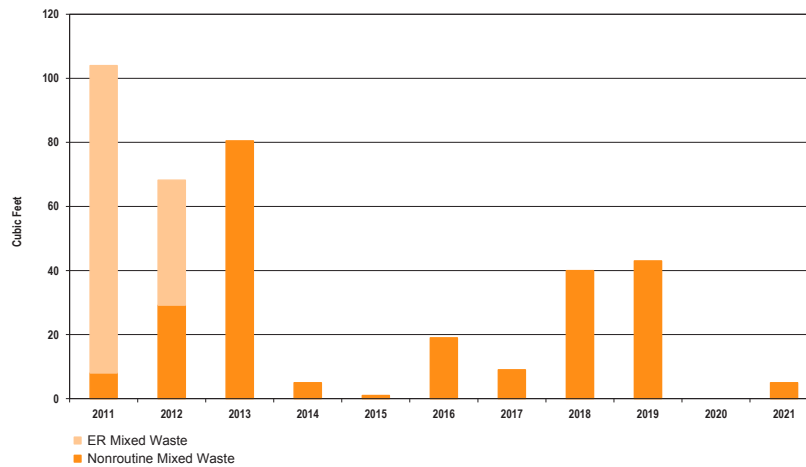

**Figure 2-1e. Mixed Waste Generation from ER and Nonroutine Operations, 2011 – 2021.**

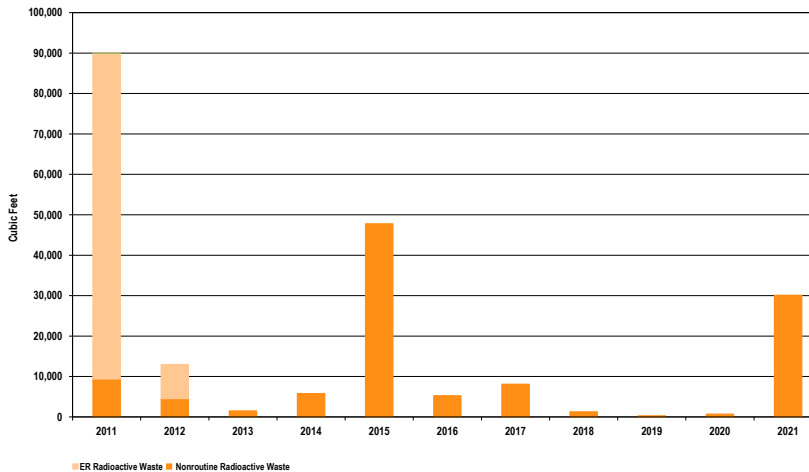

**Figure 2-1f. Radioactive Waste Generation from ER and Nonroutine Operations, 2011 – 2021.**

Emission Standards for Hazardous Air Pollutants (NES-HAPs), Clean Water Act (e.g., State Pollutant Discharge Elimination System [SPDES]), Safe Drinking Water Act (SDWA), Resource Conservation and Recovery Act (RCRA), and other programs. Other compliance initiatives at the Laboratory involve special projects, such as monitoring drinking water systems for emerging contaminants, establishing a wildland fire program, increasing onsite pollinator habitat, retrofitting or replacing air conditioning equipment refrigerants, and managing legacy facilities. See Chapter 3 for a list of regulatory programs to which BNL subscribes and a thorough discussion of these programs and their status.

**2.3.4.2 Groundwater Protection**

BNL’s Groundwater Protection Program is designed to prevent negative impacts to groundwater and restore groundwater quality by integrating pollution prevention efforts, monitoring, groundwater restoration projects, and communicating performance. The Laboratory has developed a Groundwater Protection Contingency Plan that defines an orderly process for quickly verifying the results and taking corrective actions in response to unexpected monitoring results (BNL 2018). Key elements of the groundwater program are full, timely disclosure of any off-normal occurrences and regular communication on the performance of the program.

Chapter 7 and SER Volume II, Groundwater Status Report, provide additional details about this program, its performance, and monitoring results for 2021.

#### 2.3.4.3 Waste Management

Due to the world-class research it conducts, BNL generates a wide range of wastes. These wastes include materials common to many businesses and industries, such as office wastes (e.g., paper, plastic, etc.), aerosol cans, batteries, paints, and oils. However, the Laboratory's unique scientific activities also generate specialized waste streams that are subject to additional regulation and special handling, including radioactive, hazardous, industrial, and mixed waste. BNL's Waste Management Facility (WMF), operated by the EPD, is responsible for collecting, storing, transporting, and managing the disposal of these specialized wastes. This modern facility was designed for handling hazardous, industrial, radioactive, and mixed waste, and is comprised of two staging areas: a facility for hazardous, industrial, and mixed waste in Building 855, regulated by RCRA, and a reclamation building for radioactive material in Building 865. The RCRA building is managed under a permit issued by the New York State Department of Environmental Conservation (NYSDEC).

These buildings are used for short-term storage of waste before it is packaged or consolidated for off-site shipment to permitted treatment and disposal facilities. Waste can either be generated from routine operations, defined as ongoing industrial and experimental operations, or from non-routine, defined by that generated by remediation projects, facility decommissioning activities, or one-time events (e.g., lab cleanouts). In 2021, BNL generated the following types and quantities of waste from routine operations:

- Hazardous waste: 4.2 tons
- Mixed waste: 0 ft<sup>3</sup>
- Radioactive waste: 3,276 ft<sup>3</sup>

Hazardous waste from routine operations increased during 2021, as shown in Figure 2-1a, as the Lab recovered from the limited operational status caused by the COVID-19 pandemic. No mixed waste was generated. Radioactive waste generation stayed within the range reflecting

normal operations, as shown in Figure 2-1c.

BNL's inventory of legacy waste has been significantly reduced over the years. Figures 2-1d through 2-1f show waste generated from non-routine operations. Waste generation from these activities can vary significantly from year to year as various decommissioning and remedial actions are conducted. The increase in non-routine radioactive and mixed waste generation during 2021 is due to the demolition of the former Hot Laundry Facility (Building 650).

#### 2.3.4.4 Pollution Prevention and Waste Minimization

The BNL Pollution Prevention (P2) Program reflects national and DOE pollution prevention goals and policies and represents an ongoing effort to make pollution prevention and waste minimization an integral part of BNL's operating philosophy.

Pollution prevention and waste reduction goals have been incorporated into the DOE contract with BSA, BNL's ESSH Policy, the PEMP associated with the Laboratory's operating contract with DOE, and BNL's SSP. Key elements of the P2 Program include:

- Eliminate or reduce emissions, effluents, and waste at the source where possible, as practicable;
- Procure environmentally preferable products (known as "affirmative procurement");
- Conserve natural resources and energy;
- Reuse and recycle materials;
- Achieve or exceed BNL/DOE waste minimization, P2, recycling, and affirmative procurement goals;
- Comply with applicable requirements (e.g., New York State Hazardous Waste Reduction Goal, executive orders, etc.);
- Reduce waste management costs;
- Implement P2 projects;
- Improve employee and community awareness of P2 goals, plans, and progress.

The BNL P2 and recycling programs have achieved reductions in waste generated by routine operations, as shown in Figures 2-1a through 2-1c, since 2018, radioactive waste generation rates have increased due to BNL's growing Medical Isotope Research Program. Hazardous waste generation rates are also increasing despite the



Table 2-1. BNL Pollution Prevention, Waste Reduction, and Recycling Programs, 2021.

Waste Description	Type of Project	Pounds Reduced, Reused, Recycled, or Conserved in 2021	Waste Type	Potential Costs for Treatment and Disposal	Revenue/(Cost) of Recycle, Prevention	Estimated Cost Savings	Project Description Details
Office Paper	Recycled	48,820	Regular Trash	\$5,858	(\$13,000)	\$8,353	Collected and transported to a transfer facility for recycling along with regular trash, daily construction, and demolition debris (C&D) from daily maintenance activities and other recyclables. Savings for all are based on cost to dispose of as trash based on an average cost of disposal of \$240/ton. The cost of recycling is a flat fee of \$13K for all paper and cardboard and no cost/revenue for bottles and cans.
Cardboard	Recycled	129,120	Regular Trash	\$15,494			
Bottles/Cans	Recycled	10,820	Regular Trash	\$1,298	\$0	\$1,298	
Printer Toner Cartridges	Recycled	906	Regular Trash	\$109	\$0	\$109	Printer toner cartridges were picked up by vendor for recycling, saving the cost to dispose as regular trash at \$240/ton.
Metals	Recycled	924,440	Regular Trash	\$110,933	\$36,978	\$147,910	Cost avoidance was based on \$240/ton for disposal as trash, plus \$37,710 revenue based on \$0.04/lb.
Electronic Waste	Recycled	127,240	Electronic Waste	\$15,269	\$50,896	\$66,165	Cost avoidance was based on \$240/ton for disposal as trash, plus \$30,248 revenue based on \$0.40/lb.
Electronic Reuse	Reuse	17,138	Electronic Waste	\$1,148,000	(\$6,855)	\$1,141,145	The Laboratory reuses electronic equipment if possible. If not reused, the electronics would provide scrap metal revenue at \$0.40/lb. Savings are based on the cost of purchasing the reused items as new items minus the scrap value.
Building 452 Oil Skimmer	Source Reduction	0	Industrial Waste	\$0	\$0	\$0	Reduced oily water waste stream (non-halogenated oil) from air compressors by skimming off oil and leaving water phase. Water may be discharged to sanitary system. In 2021, no oil was sent for reprocessing.
Used Motor Oil	Energy Recovery	10,384	Industrial Waste	\$623	\$4,095	\$4,718	Used motor oil from Building 452 and the motor pool was given to Strebels Laundry Service to fire their boilers. In 2021, they collected 1,247 gallons (10,400 lbs) of oil at \$0.50/gal, which avoided the costs for disposal as used oil at \$43.81/drum and 25 shipping drums at \$120/drum.

(continued on next page)

Table 2-1. BNL Pollution Prevention, Waste Reduction, and Recycling Programs, 2021

Waste Description	Type of Project	Pounds Reduced, Reused, Recycled, or Conserved in 2021	Waste Type	Potential Costs for Treatment and Disposal	Revenue/(Cost) of Recycle, Prevention	Estimated Cost Savings	Project Description Details
Blasocut Machining Coolant	Recycled/ Reused	4,348	Industrial Waste	\$1,638	\$19,180	\$20,818	Central Shops Division operates a recycling system that reclaims Blasocut, an aqueous machining coolant. Recycling involves aeration, centrifuge, and filtration. The system provides reclaimed coolant for use Lab-wide, reducing purchases of new Blasocut. The associated cost avoidance is based on the cost to dispose of ten drums of unreclaimed Blasocut as industrial waste/used oil at \$43.81; the empty drums needed to disposal as industrial waste (\$120/drum). The cost benefit of recycling is based on savings of using ten drums of recycled material versus purchasing virgin Blasocut @ \$1,918/drum. Ongoing staffing and mechanical issues have limited the use of the machine shop reducing the amount of blasocut consumed as compared to past activities. Only 521 gallons (4,348 lbs.) of Blasocut lubricant were recycled during 2021.
Concrete Reuse	Recycled/ Reused	0	C&D Debris	\$0	\$0	\$0	Concrete from demolitions was stored onsite and crushed for reuse in other construction projects (e.g., sidewalks and parking lots). No onsite stored concrete was crushed for reuse during 2021.
Tires	Recycled	13,720	Regular Trash	\$1,646	\$0	\$1,646	Truck tires were sent for recycling from the motor pool. Cost savings were based on cost to dispose of as trash at \$240/ton.
Lead Acid Batteries	Recycled	27,560	Universal Waste	\$9,922	\$0	\$9,922	Universal waste disposal costs for lead and sulfuric acid batteries were avoided by sending directly for recycling. No revenue is generated from recycling batteries. Savings are based on disposal as Universal Waste at 0.36/lb.
Lead Scrap	Recycled	0	Hazardous Waste	\$0	\$0	\$0	No lead scrap was recycled during 2021.
Fluorescent Bulbs	Recycled	7,404	Universal Waste	\$2,661	\$0	\$2,661	BNL manages these fluorescent bulbs as RCRA Universal Waste where they are ultimately sent for recycling. There is no other option for managing this waste stream.
Garnet	Recycled	0	Industrial Waste	\$0	\$0	\$0	Garnet used in machine shop was sent for recycling. Cost savings are based on cost to dispose of as Regulated Industrial Waste.
<b>TOTAL</b>		<b>1,321,900</b>		<b>\$1,313,451</b>	<b>\$91,294</b>	<b>\$1,404,744</b>	<b>BNL disposed 493,360 lbs of Regular Trash. BNL's 2021 recycling rate is 73%.</b>

(continued on next page)

Table 2-1. BNL Pollution Prevention, Waste Reduction, and Recycling Programs, 2021. (concluded).

Waste Description	Type of Project	Pounds Reduced, Reused, Recycled, or Conserved in 2021	Waste Type	Potential Costs for Treatment and Disposal	Revenue/(Cost) of Recycle, Prevention	Estimated Cost Savings	Project Description Details
2020 - C&D Demo - Metal	Recycled	21,840	Solid Waste	\$1,092	\$0	\$1,092	Debris from the demolition of Apartments 366 and 367 occurred at the end of 2020 for which information wasn't available for the 2021 report. Revenue from the recyclable materials is integrated into the overall cost of the contract so the revenue can't be calculated. Savings are based on the cost to dispose of the recyclable materials as C&D waste based at an average cost of disposal of \$0.05/lb. The concrete was sent off site for crushing and reuse.
2020 - C&D Demo - Glass	Recycled	9,320	Solid Waste	\$466	\$0	\$466	
2020 - C&D Demo - Concrete	Recycled	972,000	Solid Waste	\$48,600	\$0	\$48,600	
C&D Demo - Metal	Recycled	299,600	Solid Waste	\$14,980	\$0	\$14,980	Debris by the demolition of Building 650 (former Hot Laundry Facility) and Building 421. Cost/credit for the recyclable materials is part of the contract with the subcontractor but the exact amount can't be calculated. Savings for all are based on cost to dispose of as trash based on an average cost of disposal of \$0.05/lb. The concrete was sent off site for crushing and reuse.
C&D Demo - Glass	Recycled	2,280	Solid Waste	\$114	\$0	\$114	
C&D Demo - Concrete	Recycled	147,660	Solid Waste	\$7,383	\$0	\$7,383	
<b>TOTAL</b>		<b>1,452,700</b>		<b>\$72,635</b>	<b>\$0</b>	<b>\$72,635</b>	<b>BNL sent 1,797,240 lbs of nonrecyclable C&amp;D waste to a C&amp;D Landfill from the above demo projects and 418,200 from routine operations. BNL's recycling rate for demolition is 40%.</b>

impact of COVID-19 on Laboratory operations. BNL's EMS establishes objectives and targets to drive sustainable business practices, but growth in the research programs at the Lab is creating new waste streams that offset the impact of BNL's P2 efforts. Regardless, P2 efforts still reduce the risk of environmental impacts from BNL operations. Table 2-1 describes the P2 projects implemented through 2021, and provides the number of pounds of materials reduced, reused, or recycled, as well as the estimated cost benefit of each project.

The P2 program also provides funding for the line organizations to implement new hazard reduction or sustainability ideas. During 2021, EPD provided \$14,000 for seven projects that provided an environmental benefit. The projects included improved chemical storage, overfill alarm for oil storage tank, hazardous chemical substitutions, and data center energy improvements. Future projects funded through this process will be added to Table 2.1 when they involve an ongoing, trackable cost/benefit worth reporting.

The implementation of P2 opportunities, recycling programs, and conservation initiatives has reduced both waste volumes and management costs. In 2021, these efforts resulted in nearly \$1.5 million in cost avoidance or savings and approximately 2.8 million pounds of materials being reduced, recycled, or reused annually.

In 2021, BNL collected approximately 462 tons of scrap metal for recycling. Cardboard, office paper, bottles and cans, construction debris, motor oil, lead, automotive batteries, electronic scrap, fluorescent light bulbs, and drill press/ machining coolant were also recycled. Table 2-2 shows the total number of tons of the materials recycled. The baseline recycling rate goal for federal facilities is 50 percent. BNL's annual average recycling rate consistently outperforms the baseline. The 2021 annual recycling rate was 73 percent.

In 2021, BNL's sustainability program was once again honored by receiving the Green Electronics Council's Electronic Product Environmental Assessment Tool (EPEAT) Award for purchasing EPEAT-registered electronic products which meet strict environmental criteria that address the full product lifecycle, from energy conservation to toxic materials to product longevity

**Table 2-2. BNL Recycled Program Summary, 2012-2021.**

Recycled Waste	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021
Mixed paper	142	160	150	91	89	84	65	60	34	24.4
Cardboard	100	97	78	12.4	73	74	74	71	43	64.6
Bottles/Cans	18	16.5	17.1	22.1	11	7.9	10.2	10.6	7.7	5.4
Tires	10	7.1	7.6	5.4	6.4	5.2	8.8	11	1.4	6.9
Concrete (crushed/reused onsite)	4,050	3,500	4,000	0	4,200	3,500	0	0	0	0
Used motor oil	6.3	6.2	8.0	5.3	10.9	12.5	9.3	4.0	4.2	5.2
Condensor oil	--	--	--	--	--	--	--	--	--	0
Metals	278	174	256	737	426	621	559	513	234	462
Automotive & UPS batteries	2	2.1	1.4	1.9	1.4	0.6	15	13	30	13.8
Printer/Toner cartridges	2.1	5.6	1.1	1.0	n/a	1.2	1.1	1.0	0.5	0.5
Fluorescent bulbs	7.9	6.8	9.9	8.0	4.8	2.5	2.3	2.3	3.2	3.7
Blasocut coolant	22.4	22.6	19.4	10.2	9.4	7.8	11.7	5.1	2.6	2.2
Electronic reuse	3.2	1.4	10.5	25	17	19	21.7	17.3	7.5	8.6
Scrap electronics	30.9	23	29.3	42	24	23.1	53.3	93.9	37.8	63.6
Garnet	---	---	---	---	---	20.5	21	0	18.3	0
<b>Recycling Subtotal:</b>	<b>4,673</b>	<b>4,022</b>	<b>4,588</b>	<b>961</b>	<b>4,873</b>	<b>4,379</b>	<b>852</b>	<b>802</b>	<b>424</b>	<b>661</b>
<b>Municipal Solid Waste</b>	492	494	499	429	344	386	391	383	252	247
<b>Recycling Rate (%)</b>	<b>63%</b>	<b>76%</b>	<b>58%</b>	<b>77%</b>	<b>67%</b>	<b>69%</b>	<b>69%</b>	<b>68%</b>	<b>63%</b>	<b>73%</b>

**Construction and Demolition (C&D) Summary:**

Construction Debris (Routine)	380	304	351	372	266	256	208	271	149	209
<b>Demolition Projects:</b>										
Metals	60	90	0	0	0	0	51.5	13	10.9	161
Concrete (Sent offsite)	4,050	3,500	4,000	0	4200	3500	0	491	486	560
Glass	---	---	---	---	---	---	---	1	5	6
Construction and demolition (other recycle)	0	0	0	0	0	0	664	499	0	0
Construction and demolition (landfill)	---	---	---	---	---	---	---	---	452	898
<b>C&amp;D Recycling Rate (%)</b>									<b>46%</b>	<b>40%</b>

Note: All units are tons.

and end-of-life management. BNL also received the DOE's GreenBuy Award and received a second GreenBuy Superior Award after receiving the first during 2020. The GreenBuy Award recognizes DOE sites for purchases of materials that are energy and water efficient and made from biobased or recycled content material. The GreenBuy Superior Award identifies BNL as a site that has achieved GreenBuy Gold status five or more times.

#### 2.3.4.5 Water Conservation

BNL's water conservation program has achieved dramatic reductions in water use since the mid-1990's. The Laboratory continually evaluates water conservation as part of facility upgrades or new construction initiatives. These efforts include more efficient and expanded use of chilled water for cooling and heating/ventilation and air conditioning (HVAC) systems to reduce use of once-through cooling water for other



systems. The Laboratory's goal is to reduce the consumption of water and reduce the possible impact of clean water dilution on STP operations.

Figure 2-2 shows the 20-year trend of water consumption. Total water consumption in 2021 was down slightly from previous years, mainly due to fewer people onsite due to remote working agreements. The water intensity (gallon/gross square foot) also continues to decrease. In each of the past ten years, the water consumption total was approximately half the 1999 total—a reduction of nearly a half billion gallons per year.

#### 2.3.4.6 Energy Management and Conservation

The Laboratory's Energy Management Group continues to reduce energy use and costs by identifying and implementing cost-effective, energy-efficient projects; monitoring energy use and utility bills; and assisting in obtaining the least expensive energy sources possible. The group is responsible for developing, implementing, and coordinating BNL's energy management efforts and assisting DOE in meeting the energy and sustainability goals in EO 13834, DOE Order 436.1, and the U.S. Secretary of Energy's initiatives. The Laboratory's SSP addresses all aspects of the DOE energy, water, transportation, and other sustainability goals. In the future, the SSP will reflect new goals as directed by the DOE as part of the Federal Site Sustainability Plan. The goals will be focused on a reduction of carbon emissions emitted by federal facilities in order to reduce the impact of climate change.

BNL has more than 4.8 million square feet of building space. Many scientific experiments at the Laboratory use particle beams generated and accelerated by electricity, with the particles controlled and aligned by large electromagnets. In 2021, BNL used 261 million kilowatt hours (kWh) of electricity, 52,395 gallons of fuel oil, 12,517 gallons of propane, and 554 million cubic feet of natural gas. Fuel oil and natural gas are used to produce steam at the Central Steam Facility (CSF).

Responding to market conditions, fuel oil and natural gas have been historically used whenever each respective fuel is least expensive. In 2021, natural gas prices once again continued to be lower than fuel oil prices. As a result, natural gas was used to meet over 99 percent of the heating

and cooling needs of the Laboratory's major facilities. Given the price disparity between natural gas and oil, the Laboratory will continue to purchase natural gas over oil, further reducing greenhouse gas (GHG) emissions. Additional information on natural gas and fuel oil use can be found in Chapter 4.

BNL continues to participate in available electric load reduction curtailment programs when available. Through these programs, the Laboratory agrees to reduce electrical demand during critical days throughout the summer when New York Independent System Operator expects customer demand to meet or exceed the available supply. In return, BNL sometimes receives a rebate for each megawatt reduced on each curtailment day. The Laboratory strives to keep electric loads at a minimum during the summer by scheduling operations at the Relativistic Heavy Ion Collider to avoid peak demand periods. This scheduling reduces the electric demand by approximately 25 megawatts (MW), saving approximately \$1.4 million in electric demand costs and helping to maintain the reliability of the Long Island Power Authority (LIPA) electric system to meet all its users' needs. BNL also maintains a contract with the New York Power Authority that resulted in an overall cost avoidance of \$26.5 million for 2021.

In 2021, BNL's energy supply included 120 million kWh of clean, renewable hydropower energy, 1.0 million kWh of on-site generated solar photovoltaic (PV), and 24 million kWh of purchased renewable energy certificates (REC). The Laboratory will continue to seek alternative energy sources to meet its future energy needs, support federally required "green" initiatives, and reduce energy costs.

In 2011, BP Solar completed construction of the Long Island Solar Farm (LISF) on BNL property. The array is one of the largest solar PV arrays (32 MW) in the Northeast and spans 195 acres with more than 164,000 panels. BNL worked extensively with LIPA, BP Solar, the State of New York, and other organizations to evaluate the site and develop the project, with LIPA purchasing the output through a 20-year Power Purchase Contract.

The annual output for 2021 was 48.9 million kWh and resulted in an avoidance of approximately 27,055 metric tons CO<sub>2</sub> equivalents (MT

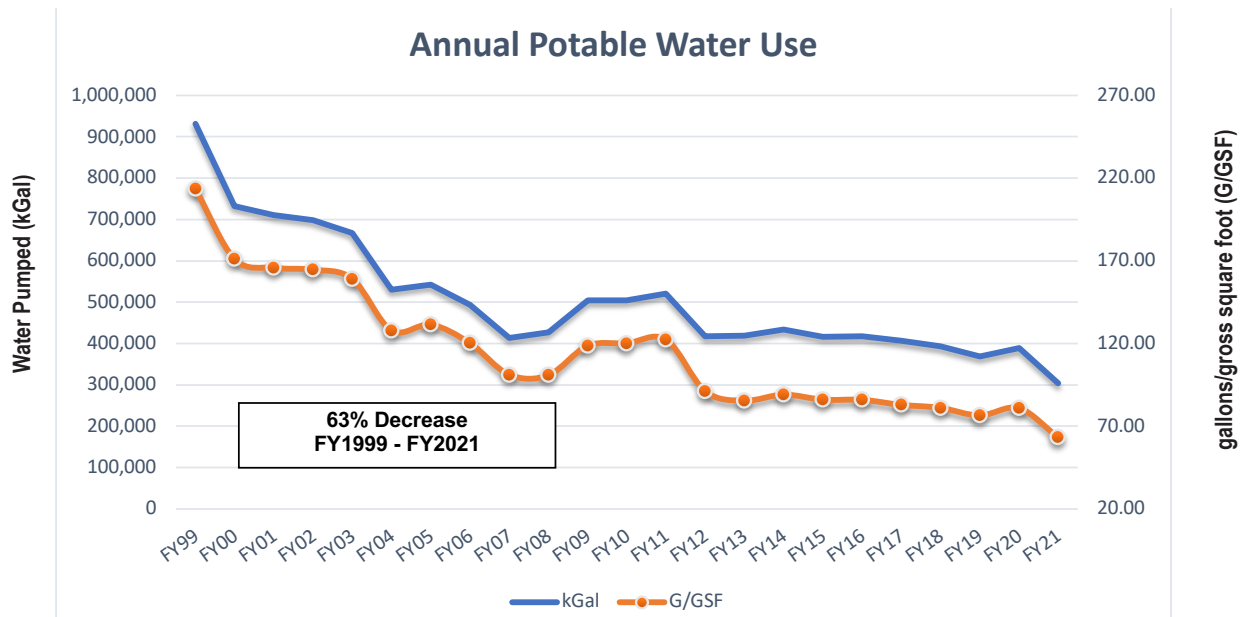


Figure 2-2. Annual Potable Water Use, 1999-2021.

CO<sub>2</sub>e) GHG offset or reduction. At the time of the installation, the estimated annual output was 44 million kWh. The actual output for the first nine operational years was an average of 50.1 million kWh/year, substantially above the estimated annual average value. As an outcome of constructing this large array on site, the Laboratory has developed a solar research program that looks at impacts of climate change on large utility-scale PV systems, as well as research and development for solar power storage and inverter efficiencies. The Federal Energy Management Program recognizes the importance of the efforts of BNL and the DOE Brookhaven Site Office to host the LISF and provides credit toward BNL’s SSP renewable energy goal.

In May 2015, the Laboratory completed the installation of the first phase of the solar PV research array as part of the Northeast Solar Energy Research Center (NSERC). In 2016, the array was increased to 816 kW with substantial funding assistance from the Sustainability Performance Office (SPO). In 2021, the NSERC generated 659,336 kWh of electricity for use on site offsetting 365 MT CO<sub>2</sub>e.

To reduce energy use and costs at non-research facilities, several activities were continued or undertaken by the BNL Energy Management

Group in 2021:

- *NYPA Power Contract*: Tenth full year of a ten-year contract with provision to extend up to 15 years that includes 15 MW of renewable (nearly zero greenhouse gas [GHG]) hydropower. This contract saved \$26.6 million in 2021.
- *DOE Sustainability Initiative*: The Energy Management Group continues to provide substantial support to the Federal/DOE-wide Sustainability Initiative and has created a BNL Sustainability Leadership Team. The team has developed a formal site-wide sustainability program beyond DOE requirements, participates in one of three subcommittees for DOE on sustainability initiatives, and provides numerous evaluations and estimates on energy use, GHG, renewable energy, and energy-efficiency options.
- *Continued progress occurred on several initiatives included in BNL’s annual SSP in 2021, such as the following*: New electric, chilled water, and steam meter installations; funding for energy conservation initiatives; the purchase of RECs in meeting BNL’s SSP goal; and training various parties on energy conservation initiatives.
- *Utility Energy Services Contract (UESC)*: A



Northeast Solar Energy Research Center (NSERC)



View of the Northeast Solar Energy Research Center (NSERC)

UESC contract/project was completed in 2015 with the National Grid which installed energy-efficient lighting, new building controls, and an energy-efficient water chiller. The environmental benefits of this UESC were estimated to include electrical savings of 3,549,114 kWh/year, fuel savings of 89,541 mm British thermal units (Btu)/year, a GHG reduction of 7,022 MT-CO<sub>2</sub>e, and a building energy intensity reduction of 11 percent. To date, actual energy savings meet or exceed the original estimates. Through a comprehensive Measurement and Verification process, BNL has been able to verify that actual energy savings were within a few percent of the original projections for five years of operation.

- *UESC II*: BNL completed an Investment Grade Audit (IGA) for a potential second UESC effort. The IGA identified several projects that will reduce BNL's deferred maintenance backlog while reducing energy intensity and GHG's. A contract for the second UESC project was expected to be awarded in 2020. However, due to some technical and financial issues, the effort has been put on

hold. BNL is evaluating other options.

- *Energy Conservation*: Energy and water evaluations are completed for 25 percent of the site each year. Cost-effective projects are identified and proposed for funding, as appropriate.
- *High Performance Sustainability Buildings (HPSB)*: Substantial completion of various energy and water conservation projects has achieved compliance in the EPA Portfolio Manager program. BNL is currently on target to meet or exceed the HPSB goal.
- *Renewable Energy*: Project support continues for the LISF and NSERC facilities and annual purchases of REC's to meet targeted goals.
- *The Central Chilled Water Facility (CCWF)*: The CCWF continues to utilize a 3.2-million-gallon chilled water storage tank to reduce peak electric demand by producing and storing chilled water during the night.
- *Natural Gas Purchase Contract*: BNL is currently saving over \$2 million per year using natural gas compared to oil.
- *Energy Savings*: As mentioned above, 25 MW of demand is rescheduled each year to avoid coinciding with the utility summer peak, saving over \$1.4 million in electricity charges. In addition, work continues in the replacement of aging, inefficient T-40 fluorescent lighting fixtures with new, high-efficiency T-8 lighting fixtures and/or LED fixtures as appropriate. Typically, 200 to 300 fixtures are replaced annually, saving tens of thousands of kWhs each year and reducing costs by several thousand dollars. Due to continued conservation efforts, overall facilities energy usage for 2021 was approximately 25.2 percent less than in 2003, producing annual savings of \$2.2 million.

The National Energy Conservation Policy Act, as amended by the Federal Energy Management Improvement Act of 1988 and the Energy Policy Acts of 1992 and 2005, as well as the Energy Independence and Security Act of 2007, requires federal agencies to apply energy conservation measures and improve federal building design to reduce energy consumption per square foot (Energy Intensity). A current goal of EO 138434 is to reduce energy consumption per square foot, relative to 2015, by 25 percent by the year 2025.

As shown in Figure 2-3, BNL's energy use per square foot in 2021 was 25.2 percent less than in FY 2003. It is important to note that energy use for most buildings and facilities at the Laboratory is largely weather dependent. Further, after decades of various energy conservation measures nearly all the cost-effective measures have been implemented. Regardless, BNL will continue to strive to meet the energy intensity reduction goals. In 2021, energy intensity was 0.1 percent less than the base year of 2015, which was less than previous years due to a change in how the NSERC electricity production was factored into BNL's energy consumption.

#### **2.3.4.7 Natural and Cultural Resource Management Programs**

Through its Natural Resource Management Plan (BNL 2021), BNL continues to enhance its Natural Resource Management Program for the Lab and the Upton Ecological and Research Reserve. The Laboratory also continues to enhance its Cultural Resource Management Program. A BNL Cultural Resource Management Plan (BNL 2013a) was developed to identify and manage properties that are determined to be eligible for inclusion on the National Register of Historic Places. See Chapter 6 for further information about these programs.

#### **2.3.4.8 Environmental Restoration**

The Comprehensive Environmental Response, Compensation and Liability Act (CERCLA), commonly known as Superfund, was enacted by Congress in 1980. As part of CERCLA, EPA established the National Priorities List, which identifies sites where cleanup of past contamination is required. BNL was placed on the list with 27 other Long Island sites, 12 of which are in Suffolk County. Each step of the CERCLA cleanup process is reviewed and approved by DOE, EPA, and NYSDEC, under an Interagency Agreement (IAG). This agreement was formalized in 1992. Although not formal signatories of the IAG, the New York State Department of Health (NYSDOH) and the Suffolk County Department of Health Services (SCDHS) also play key roles in the review process.

Most of the contamination at the Laboratory is associated with past accidental spills and outmoded practices for handling, storing, and

disposing of chemical and radiological material. BNL follows the CERCLA process, which includes the following steps:


- Conduct a remedial investigation to characterize the nature and extent of contamination and assess the associated risks;
- Prepare a feasibility study and proposed plan to identify and evaluate remedial action alternatives and present the proposed alternative;
- Issue a Record of Decision (ROD), which is the corrective action agreed to by DOE, EPA, and NYSDEC;
- Perform the Remedial Design/Remedial Action, which includes final design, construction specifications, and carrying out the corrective action selected; and
- Removal actions (time critical or non-time critical) are also performed under the CERCLA process.

In 2021, BNL's eight active groundwater treatment systems removed approximately 58 pounds of volatile organic compounds (VOCs) and 0.34 millicurie (mCi) of strontium-90 (Sr-90) and returned one billion gallons of treated water to the sole source aquifer. In early 2021, BNL proposed to the regulatory agencies the addition of new Areas of Concern 33 (PFOS and PFOA) and 34 (1,4-Dioxane). Groundwater characterization data identified the need to modify the OU VI ethylene dibromide treatment system with additional extraction wells to capture deeper contamination. In accordance with a CERCLA Action Memorandum to conduct a Time Critical Removal Action, construction of two groundwater treatment systems to address PFAS contamination from the former and current firehouse source areas was initiated in July. Temporary wells were installed to characterize a firefighter training area west of Building 170 for PFAS, resulting in the identification of new sub-AOC 33J.

These groundwater systems are operated in accordance with Operations and Maintenance manuals. Institutional controls were also monitored and maintained for the cleanup areas in accordance with the RODs to help ensure the remedies remain protective of human health and the environment. An annual evaluation of these controls was submitted to the regulatory agencies. Table 2-3 provides a description of each Operable Unit and a



**BUILDING ENERGY PERFORMANCE**  
**BTU / FT<sup>2</sup> Change (%) vs. Baseline Year(s)**

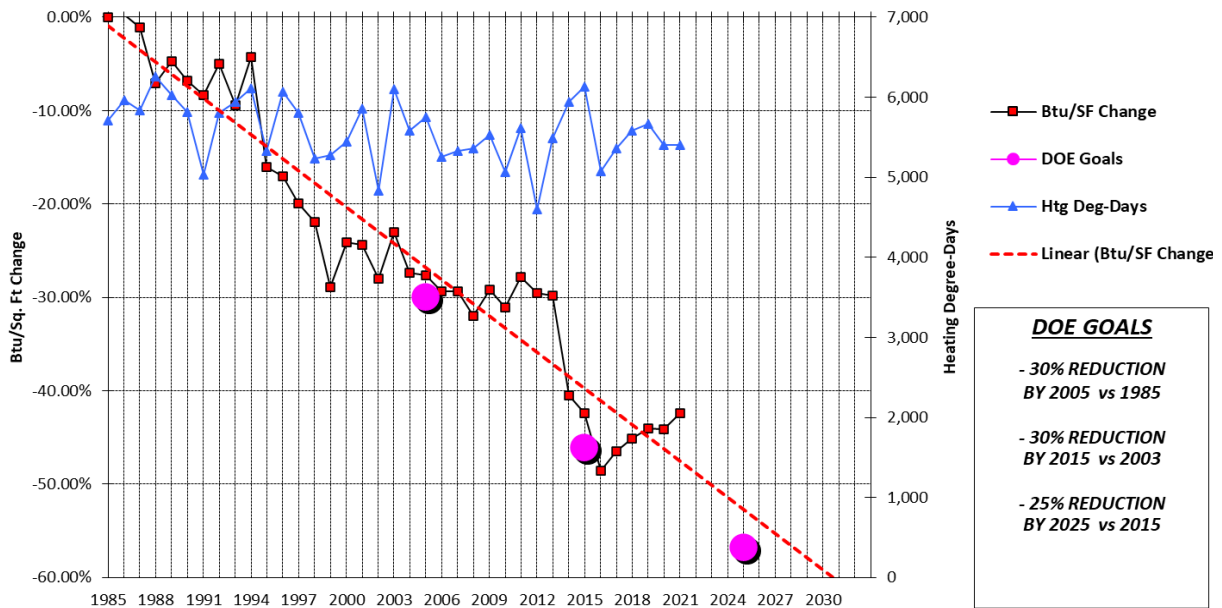

**Figure 2-3. BNL Building Energy Performance for 2021 (Btu/SF Change Percent vs. Baseline Years).**

summary of environmental restoration actions taken. See Chapter 7 and SER Volume II, Groundwater Status Report, for further details. In 2021, BNL continued the surveillance and maintenance of the Brookhaven Graphite Research Reactor (BGRR) and the HFBR. Demolition of the HFBR stack was completed in February, followed by soil and below ground structure removal and a final status survey. All waste was disposed of off-site and the contractor demobilized from the site in January 2022.

**2.4 IMPLEMENTING THE ENVIRONMENTAL MANAGEMENT SYSTEM**

**2.4.1 Structure and Responsibility**

All employees at BNL have clearly defined roles and responsibilities in key areas, including environmental protection. Supervisors are required to work with their employees to develop and document Roles, Responsibilities, Accountabilities, and Authorities (R2A2). BSA has clearly defined expectations for management and staff which must be included in the R2A2 document. Under the BSA performance-based management

model, senior managers must communicate their expectation that all line managers and staff take full responsibility for their actions and be held accountable for ESSH performance. Environmental and waste management technical support personnel assist the line organizations with identifying and carrying out their environmental responsibilities. Environmental Compliance Representatives (ECRs) are deployed to organizations throughout the Laboratory as an effective means of integrating environmental planning and sustainability into the work planning processes of the line organizations. A comprehensive training program for staff, visiting scientists, and contractor personnel is also in place, thus ensuring that all personnel are aware of their ESSH responsibilities.

**2.4.2 Communication and Community Involvement**

In support of BNL’s commitment to open communication and community involvement, the Stakeholder and Community Relations (SCR) Office develops best-in-class communications,

Table 2-3. Summary of BNL 2021 Environmental Restoration Activities.

Project	Description	Environmental Restoration Actions
Soil Projects	Operable Unit (OU) I/III/III/VII	<ul style="list-style-type: none"> <li>Performed inspections, monitoring, and maintenance of institutional controls for cleanup areas.</li> </ul>
Groundwater Projects	OU III/V/VI	<ul style="list-style-type: none"> <li>Continued operation of seven groundwater treatment systems that remove volatile organic compounds (VOCs) and one system that removes strontium-90 (Sr-90).</li> <li>Removed 58 pounds of VOCs and 0.3 mCi of Sr-90 during the treatment of 1.0 billion gallons of groundwater. Since the first groundwater treatment system started operating in December 1996, approximately 7,760 pounds of VOCs and 34 mCi of Sr-90 have been removed, while treating approximately 30 billion gallons of groundwater.</li> <li>Collected and analyzed approximately 1,122 sets of groundwater samples from 491 monitoring wells.</li> <li>Installed 70 temporary wells and collected multiple samples from each location.</li> <li>Installed temporary and permanent groundwater wells to characterize the ethylene dibromide identified in the deeper portion of the aquifer in the OU VI plume. The data indicates the need to modify the existing treatment system with additional extraction wells.</li> </ul>
	OU VIII (PFOS/PFOA/1,4-Dioxane)	<ul style="list-style-type: none"> <li>New Areas of Concern (AOC) 33 (PFOS and PFOA) and 34 (1,4-Dioxane) established in early 2021.</li> <li>Characterized a PFAS plume originating from a previously unknown firefighter training area west of Building 170.</li> <li>Temporary and permanent wells were used to characterize low levels of PFAS in the southwestern portion of the BNL site that is within the source water contributing area for the Suffolk County Water Authority William Floyd Wellfield.</li> <li>An Action Memorandum to conduct a time-critical removal action was approved in August to address PFAS contamination from the former and current firehouse source areas.</li> <li>Began construction of two PFAS groundwater treatment systems in July downgradient of the current and former firehouse facilities.</li> </ul>
Peconic River	OU V	<ul style="list-style-type: none"> <li>A population survey of fish in the on-site portion of the Peconic River was performed under BNL's Environmental Surveillance Program. An insufficient number of fish were identified to support sampling.</li> </ul>
Reactors	Brookhaven Graphite Research Reactor (BGRR)	<ul style="list-style-type: none"> <li>Continued long-term surveillance and maintenance, including sealing of cracks in the engineered cap, replacement of the leak detection sensor in the south cooler in the below ground ducts, repair to a hole in the rollup door on the west side of Building 701, and replaced a section of soffit and several sections of the siding on one of the protective covers.</li> </ul>
	High Flux Beam Reactor (HFBR)	<ul style="list-style-type: none"> <li>Continued long-term surveillance and maintenance, including removal of several small areas of potential asbestos on the floor, as well as posting these and several other areas indicating that there is a potential for Asbestos Containing Material, repair to the cracks and holes above the generator room door, and collection and disposal of stack paint chips on the ground outside the stack construction zone.</li> </ul>
	Stack (Building 705)	<ul style="list-style-type: none"> <li>Demolition of the stack was completed in February, followed by soil and below ground structure removal, and a final status survey. All waste was disposed of off-site, and the contractor demobilized from the site in January 2022.</li> <li>The draft Stack Closeout Report was submitted to the regulators for review in December.</li> </ul>
	Brookhaven Medical Research Reactor (BMRR)	<ul style="list-style-type: none"> <li>Continued surveillance and maintenance activities.</li> </ul>
Former Buildings 810/811	Former Radiological Liquid Processing Facility	<ul style="list-style-type: none"> <li>Maintained institutional controls of the area.</li> </ul>
Building 801	Inactive Radiological Liquid Holdup Facility	<ul style="list-style-type: none"> <li>Performed routine surveillance and maintenance of the facility.</li> </ul>
Building 650	Inactive Radiological Decon Facility	<ul style="list-style-type: none"> <li>Completed demolition of the facility, performed as-left survey and all waste disposed of off-site by July.</li> </ul>

science education, government relations, and community involvement programs that advance the science and science education missions of the Laboratory. SCR contributes to the public's understanding of science, enhances the value of the Laboratory as a community, and ensures that internal and external stakeholders are properly informed and have a voice in decisions of interest and importance to them. SCR also works to maintain relationships with BNL employees and external stakeholders, such as neighbors, business leaders, elected officials, and regulators to provide an understanding of the Laboratory's science and operations, including environmental stewardship and restoration activities, and to incorporate community input into BNL's decision-making process.

To facilitate stakeholder input, SCR's Stakeholder Relations Office, in coordination with the EPD, participates in or conducts on- and off-site meetings which include discussions, presentations, roundtables, and workshops. Stakeholder Relations and EPD staff attend local civic association meetings, canvass surrounding neighborhoods, conduct Laboratory tours, and coordinate informal information sessions and formal public meetings, which are held during public comment periods for environmental projects.

BNL's Internal Communications Office manages programs to increase internal stakeholder awareness, understanding, and support of Laboratory initiatives; fosters two-way communications; and updates internal stakeholders on BNL priorities, news, programs, and events.

The SCR's Office of Educational Programs manages various education initiatives and programs that support the scientific mission at BNL and the DOE. Programs include Summer Science Explorations for grades four through 12, the Science Learning Center, internships, contests in science, technology, engineering, math, and postdoctoral programs.

#### 2.4.2.1 Communication Forums

To create opportunities for effective dialogue between the Laboratory and its stakeholders, several forums for communication and involvement have been established, such as the following:

- The Brookhaven Executive Roundtable (BER), established in 1997 by DOE's

Brookhaven Site Office, meets routinely to update local, state, and federal elected officials and their staff, regulators, and other government agencies on environmental and operational issues, as well as scientific discoveries and initiatives.

- The Community Advisory Council (CAC), established by BNL in 1998, advises Laboratory management primarily on environmental, health, and safety issues related to BNL that are of importance to the community. The CAC is comprised of 26 member organizations and individuals representing civic, education, employee, community, environmental, business, and health interests. The CAC sets its own agenda in cooperation with the Laboratory meeting six months a year. The CAC is one of the primary ways the Laboratory keeps the community informed. Meetings are open to the public and are announced on the BNL homepage calendar and on the Stakeholder Relations website which links to the CAC webpage, meeting agendas, and past meeting presentations and minutes. An opportunity for public comment is provided at each meeting. Organizations interested in participating on the CAC are encouraged to attend meetings and make their interest known.
- Monthly teleconference calls are held with parties to the Laboratory's Interagency Agreement and other federal, state, and local regulators to update them on project status. The calls also provide the opportunity to gather input and feedback and to discuss emerging environmental findings and initiatives.
- Stakeholder Relations also manages several outreach programs that provide opportunities for stakeholders to become familiar with the Laboratory's facilities and research projects. Outreach programs include:
  - *Tour Program:* Opportunities to learn about BNL are offered to college, university, professional, and community groups. Tour groups visit the Laboratory's scientific machines and research facilities and meet with scientists to discuss research. Agendas are developed to meet the interests of the groups and may include sustainability and environmental stewardship issues. Tours

were provided for more than 2,500 visitors in 2019. However, due to the COVID-19 pandemic, tours were limited or not permitted in 2020 and 2021.

- *Summer Sundays*: Held on four Sundays each summer, these open houses enable the public to visit BNL science facilities, experience hands-on activities, and learn about research projects and environmental stewardship programs. In 2019, more than 4,700 visitors participated in the program. However, due to the continued COVID-19 pandemic, Summer Sundays was offered only virtually in 2021.

The Laboratory also participates in and hosts various outreach events throughout the year such as festivals, workshops, BNL's Earth Day celebration, the World Science Festival, the City of Science, the New York City Maker Faire, and the Port Jefferson Mini-Maker Faire. Brown bag lunch meetings for employees are held periodically and cover topics of interest, including project updates, newly proposed initiatives, wildlife management concerns, updates regarding COVID-19, and employee benefits information. However, these types of outreach events were limited in 2021 due to the COVID-19 pandemic.

BNL's Media & Communications Office issues press releases to news and media outlets and the Internal Communications Office publishes electronic and printed weekly employee newsletters, such as Brookhaven This Week and The Brookhaven Digest. In addition, a Director's Office web-based publication, Monday Memo, is issued bi-weekly to employees and focuses on topics important to the Laboratory population.

The Laboratory maintains an informative website at [www.bnl.gov](http://www.bnl.gov), where these publications, as well as extensive information about BNL's science and operations, past and present, are posted. In addition, employees and the community can subscribe to the Laboratory's e-mail news service.

Community members can ask questions or comments by clicking on the "Let us know" link found under "Listening to you" on the Stakeholder Relations website at [www.bnl.gov/stakeholder/](http://www.bnl.gov/stakeholder/). Community members can also subscribe to the weekly e-newsletter, Brookhaven This Week, found on the Media Communications webpage at [www.bnl.gov/](http://www.bnl.gov/), which keeps Lab employees and

the community informed about happenings at BNL, explains some of the science behind Laboratory research, and invites subscribers to educational and cultural events.

The COVID-19 pandemic did not stop BNL from proactively communicating with its internal and external stakeholders through many virtual platforms during 2021. Monthly interagency calls were held and, as stated above, all of the traditional Summer Sunday open house forums were held virtually. Additionally, all regularly scheduled Community Advisory Committee and Brookhaven Executive Roundtable meetings were held virtually to ensure continued and timely communication with the community.

#### 2.4.2.2 *Community Involvement in Cleanup Projects*

In 2021, BNL updated stakeholders virtually on the progress of environmental cleanup projects, additional initiatives, and health and safety issues via mailings, briefings, and presentations given at CAC and BER meetings. These topics included the following:

- *Climate and Energy Research*: The CAC was informed about a field study in a coastal-urban environment, as well as exciting developments in the field of climate research and energy storage.
- *Actinium-225*: The CAC learned about High Energy Accelerator Production of the medical isotope Actinium-225.
- *Electron Ion Collider*: The CAC received updates about the timeline, approval process, infrastructure, and science that will be necessary for the construction and operation of the Electron Ion Collider (EIC), a particle accelerator that will collide electrons with protons and nuclei to produce snapshots of those particles' internal structure. EIC research will spark innovation and enable widespread technological advances.
- *Natural & Cultural Resources*: The CAC received updates on BNL's natural resources, such as the status of flora and fauna on site, Cesium-137 in deer, terrestrial vegetation, and soil. However, the COVID-19 pandemic caused cancellation of most the Natural Resources Program in 2021.



- *Environmental Updates:* In 2021, the CAC also received environmental updates such as the general status of the groundwater contaminant plumes and remediation systems; updates on the demolition and decommissioning of the High Flux Beam Reactor (HFBR) Stack; updates on emerging contaminants PFAS and 1,4 Dioxane in groundwater and proposed NYS drinking water standards for these contaminants; as well as national emission standards for hazardous air pollutants.

site-wide program that identifies potential pathways for exposure of the public and employees, evaluates the impact activities have on the environment, and ensures compliance with environmental permit requirements. The EMP defines how the Laboratory will monitor effluents and emissions to ensure the effectiveness of controls, adherence to regulatory requirements, and timely identification and implementation of corrective measures. The plan uses the EPA Data Quality Objective approach for documenting the decisions associated with the monitoring program. In addition to the required triennial update, an annual electronic update is also prepared. The monitoring programs are reviewed and revised, as necessary, to reflect changes in permit requirements, changes in facility-specific monitoring activities, or the need to increase or decrease monitoring based on a review of previous analytical results.

**2.4.3 Monitoring and Measurement**

DOE Order 436.1 requires DOE sites to maintain an EMS which conforms to the ISO14001 Standard for Environmental Management Systems. BNL’s EMS specifies requirements for conducting general surveillance to determine impact from site operations to the environment. DOE Order 458.1 Admin Chg 4, (2020), Radiation Protection of the Public and Environment, requires DOE sites to maintain surveillance monitoring for determining radiological impacts, if any, to the public and environment from site operations.

BNL’s EMS includes an Environmental Monitoring Program (EMP) which is a comprehensive,

As shown in Table 2-4, in 2021, there were 5,272 sampling events of groundwater, potable water, precipitation, air, plants and animals, soil, sediment, and discharges under the Environmental Monitoring Program. Specific sampling programs for the various media are described further in Chapters 3 through 8.

**Table 2-4. Summary of BNL Sampling Program Sorted by Media, 2021.**

Environmental Media	No. of Sampling Events(a)	Purpose
Groundwater	1209	Groundwater is monitored to evaluate impacts from past and present operations on groundwater quality under the Environmental Restoration, Environmental Surveillance, and Compliance sampling programs. See Chapter 7 and SER Volume II, Groundwater Status Report, for further detail.
On-Site Recharge Basins	50	Recharge basins used for wastewater and stormwater disposal are monitored in accordance with discharge permit requirements and for environmental surveillance purposes. See Chapter 5 for further detail.
Potable Water	26 C	Potable water wells and the BNL distribution system are monitored routinely for chemical and radiological parameters to ensure compliance with Safe Drinking Water Act requirements. In addition, samples are collected under the Environmental Surveillance Program to ensure the source of the Laboratory’s potable water is not impacted by contamination. See Chapters 3 and 7 for further detail.
Sewage Treatment Plant (STP)	110	The STP influent and effluent and several upstream and downstream Peconic River stations are monitored routinely for organic, inorganic, and radiological parameters to assess BNL impacts. The number of samples taken depends on flow. For example, samples are scheduled for collection at Station HQ monthly, but if there is no flow, no sample can be collected. See Chapters 3 and 5 for further detail.
Precipitation	8	Precipitation samples are collected from two locations to determine levels of mercury present in rain to support long-term monitoring of atmospheric disposition of mercury.
Air – Tritium	214	Silica gel cartridges are used to collect atmospheric moisture for subsequent tritium analysis. These data are used to assess environmental tritium levels. See Chapter 4 for further detail.

(continued on next page)

**Table 2-4. Summary of BNL Sampling Program Sorted by Media, 2021** *(concluded)*.

Environmental Media	No. of Sampling Events(a)	Purpose
Air – Particulate	323 ES/C 52 NYSDOH	Samples are collected to assess impacts from BNL operations and to facilitate reporting of emissions to regulatory agencies. Samples are also collected for the New York State Department of Health Services as part of their program to assess radiological air concentrations statewide. See Chapter 4 for further detail.
Fauna	93	Fish and deer are monitored to assess impacts on wildlife associated with past or current BNL operations. See Chapter 6 for further detail.
Flora	10	Vegetation is sampled to assess possible uptake of contaminants by plants and fauna, since the primary pathway from soil contamination to fauna is via ingestion. See Chapter 6 for further detail.
Soils	10	Soil samples are collected as part of the Natural Resource Management Program to assess faunal uptake, during Environmental Restoration investigative work, during the closure of dry-wells and underground tanks, and as part of preconstruction background sampling.
Miscellaneous	411	Samples are collected periodically from potable water fixtures and dispensers, manholes, and spills to assess process waters and to assess sanitary discharges.
Groundwater Treatment Systems Monitoring	948	Samples are collected from groundwater treatment systems operated under the Comprehensive Environmental Response, Compensation, and Liability Act program. The Laboratory has eight operating groundwater treatment systems. See discussion in Chapter 7.
State Pollutant Discharge Elimination System (SPDES)	329	Samples are collected to ensure that the Laboratory complies with the requirements of the New York State Department of Environmental Conservation-issued SPDES permit. Samples are collected at the STP, recharge basins, and four process discharge sub-outfalls to the STP.
Flow Charts	583	Flowcharts are exchanged weekly as part of BNL's SPDES permit requirements to report discharge flow at the recharge basin outfalls.
Floating Petroleum Checks	96	Tests are performed on select petroleum storage facility monitoring wells to determine if floating petroleum products are present. The number of wells and frequency of testing is determined by NYSDEC licensing requirements (e.g., Major Petroleum Facility), NYSDEC spill response requirements (e.g., Motor Pool area), or other facility-specific sampling and analysis plans.
Radiological Monitor Checks	498	Daily instrumentation checks are conducted on the radiation monitors located in Buildings 569 and 592. These monitors are located 30 minutes upstream and at the STP. Monitoring at these locations allows for diversion of wastes containing radionuclides before they are discharged to the Sewage Treatment Plant recharge basins.
Quality Assurance/Quality Control Samples (QA/QC)	302	To ensure that the concentrations of contaminants reported in the Site Environmental Report are accurate, additional samples are collected. These samples detect if contaminants are introduced during sampling, transportation, or analysis of the samples. QA/QC samples are also sent to the contract analytical laboratories to ensure their processes give valid, reproducible results.
<b>Total number of sampling events</b>	<b>5,272</b>	The total number of sampling events includes all samples identified in the Environmental Monitoring Plan (BNL 2021), as well as samples collected to monitor Environmental Restoration (CERCLA) projects, air and water treatment system processes, and by the Environmental Protection Division Field Sampling Team as special requests. The number does not include samples taken by Waste Management personnel, waste generators, or Environmental Compliance Representatives for waste characterization purposes.

**Notes:**

(a) A sampling event is the collection of samples from a single georeferenced location. Multiple samples for different analyses (i.e., tritium, gross alpha, gross beta, and volatile organic compounds) can be collected during a single sample event.

C = Compliance

ES = Environmental Surveillance

The Environmental Monitoring Program addresses three components: compliance, restoration, and surveillance monitoring.

#### **2.4.3.1 Compliance Monitoring**

Compliance monitoring is conducted to ensure that wastewater effluents, air emissions, and groundwater quality comply with regulatory and permit limits issued under the federal Clean Air Act, Clean Water Act, Oil Pollution Act, SDWA, and the New York State equivalents.

Air emissions monitoring is conducted at reactors no longer in operation, accelerators, and other radiological emission sources, as well as the CSF. Real-time, continuous emission monitoring equipment is installed and maintained at some of these facilities, as required by permits and other regulations. At other facilities, samples are collected and analyzed periodically to ensure compliance with regulatory requirements. Analytical data are routinely reported to the permitting agencies. See Chapters 3 and 4 for details.

Wastewater monitoring is performed at the point of discharge to ensure that the effluent complies with release limits in the Laboratory's SPDES permits. Twenty-four point-source discharges are monitored—12 under BNL's SPDES Permit and nine under equivalency permits issued to the Environmental Restoration Program for groundwater treatment systems. As required by permit conditions, samples are collected daily, weekly, monthly, or quarterly, and monitored for organic, inorganic, and radiological parameters. Monthly discharge monitoring reports that provide analytical results and an assessment of compliance for that reporting period are filed with the NYSDEC. See Chapter 3, Section 3.6, for details.

Groundwater monitoring is performed to comply with regulatory operating permits. Specifically, monitoring of groundwater is required under the Major Petroleum Facility License for the CSF, the RCRA permit for the Waste Management Facility, and the SPDES permit for the Sewage Treatment Plant (STP). Extensive groundwater monitoring is also conducted under the CERCLA program (described in Section 2.4.3.2 below). Additionally, to ensure that the Laboratory maintains a safe drinking water supply, BNL's potable water supply is monitored as required by SDWA, which is administered by SCDHS.

#### **2.4.3.2 Restoration Monitoring**

The Environmental Restoration Program operates and maintains groundwater treatment systems to remediate contaminant plumes both on and off site. BNL maintains an extensive network of groundwater monitoring wells to verify the effectiveness of the remediation effort. Modifications to groundwater remediation systems are implemented, as necessary, based upon a continuous evaluation of monitoring data and system performance. Details on the Peconic River monitoring program are provided in Chapter 6, and details on groundwater monitoring and restoration program are provided in Chapter 7 and SER Volume II, Groundwater Status Report.

#### **2.4.3.3 Surveillance Monitoring**

Surveillance monitoring is performed, in addition to compliance monitoring, to assess potential environmental impacts that could result from routine facility operations. The BNL Surveillance Monitoring Program involves collecting samples of ambient air, surface water, groundwater, flora, fauna, and precipitation.

Samples are analyzed for organic, inorganic, and radiological contaminants. Additionally, data collected using thermoluminescent dosimeters (i.e., devices that measure radiation exposure) strategically positioned on- and off-site is routinely reviewed under this program. Control samples (also called background or reference samples) are collected on and off the site to compare Laboratory results to areas that could not have been affected by BNL operations.

The monitoring programs can be broken down further by the relevant law or requirement (e.g., Clean Air Act) and even further by specific environmental media and type of analysis. The results of monitoring and the analysis of the monitoring data are the subject of the remaining chapters of this report. Chapter 3 summarizes environmental requirements and compliance data, Chapters 4 through 8 give details on media-specific monitoring data and analysis, and Chapter 9 provides supporting information for understanding and validating the data shown in this report.

#### **2.4.4 EMS Assessments**

To periodically verify that the Laboratory's EMS is operating as intended, assessments are

conducted as part of BNL's Contractor Assurance Program. Self-assessment is the systematic evaluation of internal processes and performance. Two types of assessments are conducted: the ISO 14001 Standard conformance assessment and the regulatory compliance assessments.

The approach for the ISO14001 program self-assessment includes evaluating programs and processes within organizations that have environmental aspects to verify conformance to the ISO14001 Standard. The assessment is performed by qualified external assessors or BNL staff members who do not have line responsibility for the work processes involved. Progress toward achieving environmental objectives is monitored, as are event-related metrics to determine the overall effectiveness of the EMS. The assessment determines if there are Laboratory-wide issues that require attention, and facilitates the identification and communication of best management practices used in one part of the Laboratory that could improve performance in other parts of the Lab.

Compliance assessments are also performed by BNL staff members who do not have line responsibility for the work processes involved to ensure that operations are in compliance with Laboratory requirements that reflect external compliance requirements. These assessments verify the effectiveness and adequacy of management processes (including self-assessment programs) at the division, department, directorate, and Laboratory levels. Special investigations are conducted to identify the root causes of events and identify corrective actions and lessons learned if regulatory noncompliance or impact occurs to correct the problem and prevent reoccurrence.

BNL management routinely evaluates progress on key environmental improvement projects. The Laboratory and DOE periodically perform assessments to facilitate the efficiency of assessment activities and ensure that the approach to performing the assessments meets DOE expectations.

The Laboratory's Contractor Assurance Program is augmented by programmatic external audits conducted by DOE. BSA staff and subcontractors also perform periodic independent reviews, and an independent third-party conducts ISO 14001 registration audits of BNL's EMS. The Laboratory is

subject to extensive oversight by external regulatory agencies (see Chapter 3 for details). Results of all assessment activities related to environmental performance are included, as appropriate, throughout this report.

## **2.5 ENVIRONMENTAL STEWARDSHIP AT BNL**

BNL has extensive knowledge of its potential environmental vulnerabilities and current operations due to ongoing process evaluations, the work planning and control system, and the management systems for groundwater protection, environmental restoration, and information management. Compliance assurance programs have improved the Laboratory's compliance status and pollution prevention projects have reduced costs, minimized waste generation, and reused and recycled significant quantities of materials. BNL is openly communicating with neighbors, regulators, employees, and other interested parties on environmental issues and progress. To maintain stakeholder trust, the Laboratory will continue to deliver on commitments and demonstrate improvements in environmental performance. The Site Environmental Report is an important communication mechanism, as it summarizes BNL's environmental programs and performance each year. New efforts to reduce carbon emissions as a means to addressing climate change impacts will be integrated into BNL's EMS in the future as directed by DOE as part of the Federal Sustainability Plan.

Additional information about the Laboratory's environmental programs is available on BNL's website at <http://www.bnl.gov>. BNL is often asked to share its experiences, lessons learned, and successes. The Laboratory's environmental programs and projects have been recognized with international, national, and regional awards, and audits have consistently observed a high level of management involvement, commitment, and support for environmental protection and the EMS.

For over 70 years, the unique, leading-edge research facilities and scientific staff at BNL have made many innovative scientific contributions possible. Today, BNL continues its research mission while focusing on cleaning up and protecting the environment.



## CHAPTER 2: ENVIRONMENTAL MANAGEMENT SYSTEM

### REFERENCES AND BIBLIOGRAPHY

- BNL 2013a. Cultural Resource Management Plan for Brookhaven National Laboratory. BNL-100708-2013. Brookhaven National Laboratory, Upton, NY. May 2013.
- BNL 2018. Groundwater Protection Contingency Plan– Response to Unexpected Monitoring Results. Environmental Monitoring Procedure EM-SOP-309, Brookhaven National Laboratory, Upton, NY. August 2018.
- BNL 2021. Natural Resource Management Plan for Brookhaven National Laboratory. BNL-112669-2021. Brookhaven National Laboratory, Upton, NY.
- DOE Order 436.1, 2011. Departmental Sustainability. U.S. Department of Energy, Washington, DC. May 2, 2011.
- Executive Order 13834, 2018. Efficient Federal Operations. Executive Office of the President, Washington, DC. May 17, 2018.
- Executive Order 14057, 2021. Catalyzing Clean Energy Industries and Jobs Through Federal Sustainability. Executive Office of the President, Washington, DC. December 8, 2021.
- ISO 14001: 2015. Environmental Management Systems – Requirements with Guidance for Use. Third Edition, 9-15-2015, International Organization for Standardization. Geneva, Switzerland.

# Compliance Status

# 3

Brookhaven National Laboratory (BNL) is subject to more than 100 sets of federal, state, and local environmental regulations; numerous site-specific permits; nine equivalency permits for operation of groundwater remediation systems; and several other binding agreements. In 2021, the Laboratory operated in compliance with most of the requirements defined in these governing documents. Instances of noncompliance were reported to regulatory agencies and corrected expeditiously.

Emissions of nitrogen oxides, carbon monoxide, and sulfur dioxide from the Central Steam Facility were all well within permit limits in 2021. There were seven recorded excess opacity measurements. Two excess opacity readings recorded by the Boiler 6 monitor on February 17 were due to a load shift and a single Boiler 6 excess opacity reading on March 28 occurred during unusually heavy rainfall believed to have interfered with the transmissometer light path. Two Boiler 7 excess opacity readings on March 15 occurred during contractor maintenance of the opacity monitor and another two on June 22 were due to start-up/shutdown of the boiler while firing #6 oil in preparation for National Grid utility maintenance of the natural gas supply system. All the excursions were documented in quarterly Site-Wide Air Emissions and Monitoring Systems Performance Reports submitted to the New York State Department of Environmental Conservation (NYSDEC).

In 2021, there were no discharges of Halon 1211 from portable fire extinguishers or Halon 1301 from accidental or fire-induced activation of fixed fire suppression systems. Halon-portable fire extinguishers continue to be removed and replaced by dry-chemical or clean agent units as part of an ongoing program to phase out the use of chlorofluorocarbons as extinguishing agents.

BNL's drinking water and the supply and distribution system were in compliance with all applicable county, state, and federal regulations regarding drinking water quality, monitoring, operations, and reporting in 2021. Most of the liquid effluents discharged to surface water and groundwater also met applicable New York State Pollutant Discharge Elimination System (SPDES) permit requirements. BNL received a Notice of Violation for continuing violation of the permit limit for Tolytriazole (TTA). A formal noncompliance report, which included a corrective action plan, was submitted to NYSDEC in September. This corrective action plan included background information on the issue, a description of all non-compliances, causes of TTA exceedances, immediate and preventative (long-term) corrective actions taken, and any proposed future actions. Groundwater monitoring at the Laboratory's Major Petroleum Facility continued to demonstrate that current oil storage and transfer operations are not affecting groundwater quality. Efforts to implement release prevention measures and minimize impacts of spills of materials continued in 2021. There were ten spills in 2021 and three of those spills met regulatory agency reporting criteria.

In 2021, due to the pandemic, inspections by federal, state, or local regulators were limited. BNL was inspected on nine occasions. These inspections included Clean Air Act compliance, Sewage Treatment Plant operations, hazardous waste management facilities, underground storage tank management, and the potable water system. Immediate corrective actions were taken to address all compliance issues raised during these inspections.

### 3.1 COMPLIANCE WITH REQUIREMENTS

The federal, state, and local environmental statutes and regulations that BNL operates under are summarized in Table 3-1, along with a discussion of the Laboratory's compliance status. A list of all applicable environmental regulations is contained in Appendix D.

### 3.2 COMPLIANCE WITH REQUIREMENTS

#### 3.2.1 Existing Permits

Many processes and facilities at BNL operate under permits issued by environmental regulatory agencies. Table 3-2 provides a complete list of the existing permits, some of which are briefly described below.

- State Pollutant Discharge Elimination System (SPDES) permits, issued by NYSDEC
- Major Petroleum Facility (MPF) license, issued by NYSDEC
- Resource Conservation and Recovery Act (RCRA) permit, issued by NYSDEC for BNL's Waste Management Facility
- Registration certificate from NYSDEC for tanks storing bulk quantities of hazardous substances (e.g., fuel oil)
- Eight radiological emission authorizations issued by the U.S. Environmental Protection Agency (EPA) under the National Emission Standards for Hazardous Air Pollutants (NESHAPs)
- Air emissions permit issued by NYSDEC under Title V of the Clean Air Act (CAA) Amendments authorizing the operation of 12 emission units
- Permit for the operation of six domestic water supply wells, one cooling water well, one irrigation well, and one fire protection well issued by NYSDEC
- Nine SPDES equivalency permits for the operation of groundwater remediation systems installed via the Interagency Agreement (Federal Facility Agreement under the Comprehensive Environmental Response, Compensation and Liability Act [CERCLA])

#### 3.2.2 New or Modified Permits

##### 3.2.2.1 *New York State Wetlands and Wild, Scenic, Recreational Rivers Act*

The New York State Wild, Scenic, and Recreational Rivers Act was created by the state legislature in 1972 to protect and preserve certain rivers considered to have remarkable scenic, recreational, geologic, fish and wildlife, historic, cultural, or other similar values. The Laboratory had no open permits in 2021.

##### 3.2.2.2 *SPDES Permit Renewal*

On January 28, 2021, the Laboratory received a SPDES Permit Renewal constituting authorization to discharge wastewater in accordance with all terms, conditions, and limitations specified in the permit. The new permit expiration date is December 31, 2030.

#### 3.2.3 EPA's Enforcement & Compliance History Online (ECHO)

EPA's ECHO provides integrated compliance and enforcement information for more than one million regulated facilities nationwide. It allows users to search for facilities by media program (e.g., Clean Air Act, Clean Water Act, Safe Drinking Water Act), location, enforcement and compliance activity, or pollutant. The facility reports include three years of violation data and five years of compliance monitoring and enforcement data.

A detailed facility report for BNL including compliance status can be found in the ECHO database at: <https://echo.epa.gov/>. To access this report, use the following information:

##### **ECHO Facility Name**

Brookhaven National Laboratory

##### **Facility Registry Service (FRS) ID**

110000616726

##### **Program Areas**

CAA, CWA, RCRA, SDWA

### 3.3 NEPA ASSESSMENTS

National Environmental Policy Act (NEPA) regulations require federal agencies to evaluate the environmental effects of proposed major federal activities. The prescribed evaluation process ensures that the proper level of environmental review is performed before an irreversible commitment of resources is made. During 2021,

Table 3-1. Federal, State, and Local Environmental Statutes and Regulations Applicable to BNL.

Regulator: Codified Regulation	Regulatory Program Description	Compliance Status	Report Sections
EPA: 40 CFR 300 40 CFR 302 40 CFR 355 40 CFR 370	The Comprehensive Environmental Response, Compensation & Liability Act (CERCLA) provides the regulatory framework for remediation of releases of hazardous substances and remediation (including decontamination and decommissioning [D&D]) of inactive hazardous waste disposal sites. Regulators include EPA, DOE, and the New York State Department of Environmental Conservation (NYSDEC).	In 1992, BNL became subject to a tri-party agreement among EPA, NYSDEC, and DOE. BNL site remediation is conducted by the Environmental Protection Division in accordance with milestones established under this agreement. The cleanup is currently in the long-term surveillance and maintenance mode for the groundwater treatment systems, former soil/sediment cleanup areas, and the reactors, and includes monitoring of institutional controls. Demolition of the High Flux Beam Reactor (HFBR) stack was completed in 2021. The HFBR reactor vessel is scheduled for decontamination and decommissioning by 2072. All groundwater treatment systems operated as required in 2021. Management of the characterization and remediation of PFOS, PFOA and 1,4-dioxane was formally included under the BNL CERCLA program. Construction of two new treatment systems to address PFOS and PFOA in groundwater downgradient of two source areas was initiated in 2021.	2.3.4.8, Chapter 7
Council for Env. Quality: 40 CFR 1500–1508 DOE: 10 CFR 1021	The National Environmental Policy Act (NEPA) requires federal agencies to follow a prescribed process to anticipate the impacts on the environment of proposed major federal actions and alternatives. DOE codified its implementation of NEPA in 10 CFR 1021.	BNL is in full compliance with NEPA requirements. The Laboratory has established sitewide procedures for implementing NEPA requirements.	3.3
Advisory Council on Historic Preservation: 36 CFR 60 36 CFR 63 36 CFR 79 36 CFR 800 16 USC 470	The National Historic Preservation Act (NHPA) identifies, evaluates, and protects historic properties eligible for listing in the National Register of Historic Places, commonly known as the National Register. Such properties can be archeological sites or historic structures, documents, records, or objects. NHPA is administered by state historic preservation offices (SHPOs; in New York State, NYSHPO). At BNL, structures that are subject to NHPA include the HFBR (Bldg. 750), the Brookhaven Graphite Research Reactor (BGRR) complex (Bldgs. 701, 703, and 801), 1960's era Apartments (Bldgs. 364 and 365.), Bldg. 120, Berkner Hall (Bldg.488), Chemistry (Bldg. 555), Physics (Bldg. 510), Computational Sciences (Bldg. 515), Instrumentation (Bldg. 535), Medical (Bldgs. 490 and 491), WW II era water tower (ST0-49), Accelerator Test Facility (Bldgs. 820, 820A, and 820B), EBNN research (Bldg. 830), Magnet Division (Bldg. 902), Alternating Gradient Synchrotron complex (Bldgs. 901, 901A, 911, 912, 913, 913a-e, and 930) and the World War I training trenches found throughout the site.	There are now multiple buildings and features at BNL that have been determined to be National Register Eligible (see list to the left). Any proposed activities involving these facilities must be identified through the NEPA/NHPA processes and evaluated to determine if the action would affect the features that make the facility eligible. BNL has a Cultural Resource Management Plan to ensure compliance with cultural resource regulations. Buildings that are 50 years old or older are reviewed under Section 106 of NHPA when proposed projects may significantly alter the structure or for building demolition. See Chapter 6 for detailed information on Cultural Resources.	3.4, Chapter 6
EPA: 40 CFR 50 40 CFR 60-61 40 CFR 63 40 CFR 80 40 CFR 82 40 CFR 98 NYSDEC: 6 NYCRR 200-202, 205, 207, 208, 211, 212, 215, 217, 218, 225, 226, 227-231, 239, 241, 248, 257. 6 NYCRR 307	The Clean Air Act (CAA) and the NY State Environmental Conservation Laws regulate the release of air pollutants through permits and air quality limits. Emissions of radionuclides are regulated by EPA via the National Emission Standards for Hazardous Air Pollutants (NESHAPs) authorizations.	All air emission sources are incorporated into the BNL Title V permit or have been exempted under the New York State air program, which is codified under the New York Codes, Rules, and Regulations (NYCRR). All applicable CAA and NYCRR regulations are incorporated into the BNL Title V permit. Radiological air emission sources are registered with the EPA.	3.5, Chapters 4 and 8

(continued on next page)



CHAPTER 3: COMPLIANCE STATUS

Table 3-1. Federal, State, and Local Environmental Statutes and Regulations Applicable to BNL (continued).

Regulator: Codified Regulation	Regulatory Program Description	Compliance Status	Report Sections
EPA: 40 CFR 109–140 40 CFR 230, 231 40 CFR 401, 403 NYSDEC: 6 NYCRR 700–703 6 NYCRR 750	The Clean Water Act (CWA) and NY State Environmental Conservation Laws seek to improve surface water quality by establishing standards and a system of permits. Wastewater discharges are regulated by NYSDEC permits through the State Pollutant Discharge Elimination System (SPDES).	At BNL, permitted discharges include treated sanitary waste and cooling tower and stormwater discharges. Except for four Tolytriazole (TTA) excursions at BNL’s sewage treatment plant (Outfall 001) and one TTA excursion at Outfall 002 (HN Recharge Basin), all other discharges met the SPDES permit limits in 2021.	3.6
EPA: 40 CFR 141–149 NYSDOH: 10 NYCRR 5	The Safe Drinking Water Act (SDWA) and New York State Department of Health (NYSDOH) standards for public water supplies establish minimum drinking water standards and monitoring requirements. SDWA requirements are enforced by the Suffolk County Department of Health Services (SCDHS).	BNL maintains a sitewide public water supply. BNL’s drinking water and the supply and distribution system were in compliance with all applicable county, state, and federal regulations regarding drinking water quality, monitoring, operations, and reporting in 2021. Corrective actions for all identified operation and maintenance deficiencies identified during the annual SCDHS sanitary survey were established and communicated with SCDHS and are being addressed by the Laboratory’s Energy and Utilities Division.	3.7
EPA: 40 CFR 112 40 CFR 300 40 CFR 302 40 CFR 355 40 CFR 370 40 CFR 372	The Oil Pollution Act, the Emergency Planning and Community Right-to-Know Act (EPCRA), and the Superfund Amendment Reauthorization Act (SARA) require facilities with large quantities of petroleum products or chemicals to prepare emergency plans and report their inventories to EPA, the state, and local emergency planning groups.	Since some facilities at BNL store or use chemicals or petroleum in quantities exceeding threshold planning quantities, the Laboratory is subject to these requirements. BNL fully complied with all reporting and emergency planning requirements in 2021.	3.8.1 3.8.2 3.8.3
EPA: 40 CFR 280 NYSDEC: 6 NYCRR 596–598 6 NYCRR 613 SCDHS: SCSC Article 12	Federal, state, and local regulations govern the storage of chemicals and petroleum products to prevent releases of these materials to the environment. Suffolk County Sanitary Codes (SCSC) are more stringent than federal and state regulations.	The regulations require that these materials be managed in facilities equipped with secondary containment, overfill protection, and leak detection. BNL complies with all federal and state requirements and continues to conform to county codes.	3.8.4 3.8.5 3.8.6
EPA: 40 CFR 260–280 NYSDEC: 6 NYCRR 360, 361, 363-365, 367,371-374, and 376	The Resource Conservation Recovery Act (RCRA) and New York State Solid Waste Disposal Act govern the generation, storage, handling, and disposal of hazardous wastes.	BNL is defined as a large-quantity generator of hazardous waste and has a permitted waste management facility.	3.9
EPA: 40 CFR 700–763	The Toxic Substances Control Act (TSCA) regulates the manufacture, use, and distribution of all chemicals.	BNL manages all TSCA-regulated materials, including PCBs, and is in compliance with all requirements.	3.10
EPA: 40 CFR 162–171 NYSDEC: 6 NYCRR 320 6 NYCRR 325–329	The Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA) and corresponding NY State regulations govern the manufacture, use, storage, and disposal of pesticides, herbicides, biocides, rodenticides, fungicides, tickicides, as well as the pesticide containers and residuals.	BNL contracts and/or employs NYSDEC-certified pesticide applicators for specific pesticide categories to apply pesticides, herbicides, biocides, rodenticides, fungicides, and tickicides. Each applicator attends Continuing Education training, as needed, to maintain current category certifications and BNL (or the contractor that applies regulated materials) files an annual report to the NYSDEC Pesticide Bureau detailing the above applications including EPA Registration Nos., dates of applications, method of application, target organisms, types, locations, quantity, and dosage rates of pesticides applied.	3.11
DOE: 10 CFR 1022 NYSDEC: 6 NYCRR 663 6 NYCRR 666	DOE regulations require its facilities to comply with floodplain/wetland review requirements. The New York State Fresh Water Wetlands and Wild, Scenic, and Recreational Rivers rules govern development in the state’s natural waterways. Development or projects within a half-mile of regulated waters must have NYSDEC permits.	BNL is in the Peconic River watershed and has several jurisdictional wetlands; consequently, development of locations in the north and east of the site requires NYSDEC permits and review for compliance under DOE wetland/floodplain regulations. BNL currently has no open wetland or scenic river permits.	3.12

(continued on next page)

**Table 3-1. Federal, State, and Local Environmental Statutes and Regulations Applicable to BNL.** *(continued).*

Regulator: Codified Regulation	Regulatory Program Description	Compliance Status	Report Sections
U.S. Fish & Wildlife Service: 50 CFR 17 NYSDEC: 6 NYCRR 182	The Endangered Species Act and corresponding New York State regulations prohibit activities that would jeopardize the continued existence of an endangered or threatened species or cause adverse modification to a critical habitat.	BNL is host to numerous species of flora and fauna. Many species have been categorized by New York State as endangered, threatened, or of special concern; and one threatened species has been designated under the Endangered Species Act. The Laboratory's Natural Resource Management Plan outlines activities to protect these vulnerable species and their habitats (see Chapter 6 for details).	3.13, Chapter 6
U.S. Fish & Wildlife Service:  Migratory Bird Treaty Act 16 USC 703-712  The Bald and Golden Eagle Protection Act 16 USC 668 a-d	The Migratory Bird Treaty Act (MBTA) implements various treaties and conventions between the U.S. and Canada, Japan, Mexico, and the former Soviet Union for the protection of migratory birds. Under the Act, taking, killing, or possessing migratory birds is unlawful. Birds protected under the act include all common songbirds, waterfowl, shorebirds, hawks, owls, eagles, ravens, crows, native doves and pigeons, swifts, martins, swallows, and others, and includes their body parts (feathers, plumes, etc.), nests, and eggs.  The Bald and Golden Eagle Protection Act (BGEPA) prohibits any form of possession or taking of both bald and golden eagles.	Compliance with the MBTA and the BGEPA are documented through the BNL Natural Resource Management Plan. The plan includes provisions for enhancing local habitat through the control of invasive species, planting of native grasses as food sources, and construction of nesting sites. All construction activities, including demolition, are reviewed to ensure there are no impacts to nesting birds. Bald Eagles have been seen routinely at various locations on the BNL site. See Chapter 6 for more on migratory birds and bald eagles.	3.13, Chapter 6
DOE: Order 231.1B Manual 231.1-1A	The Environment, Safety, and Health Reporting program objective is to ensure timely collection, reporting, analysis, and dissemination of information on environment, safety, and health issues as required by law or regulations or as needed to ensure that DOE is kept fully informed on a timely basis about events that could adversely affect the health and safety of the public, workers, the environment, the intended purpose of DOE facilities, or the credibility of the Department. Included in the order are the requirements for the Occurrence Reporting and Processing of Operations Program (ORPS).	BNL prepares an annual Site Environmental Report and provides data for DOE to prepare annual NEPA summaries and other Safety, Fire Protection, and Occupational Health and Safety Administration (OSHA) reports. The Laboratory developed the ORPS Subject Area for staff and management who perform specific duties related to discovery, response, notification, investigation, and reporting of occurrences to BNL and DOE management. The ORPS Subject Area is supported by: Occurrence Reporting Program Description, Critiques Subject Area, Occurrence Categorizer's Procedure, and the ORPS Office Procedure.	All chapters
DOE: Order 414.1D 10 CFR 830, Subpart A Policy 450.5	The Quality Assurance (QA) program objective is to establish an effective management system using the performance requirements of this Order/Rule, coupled with consensus standards, where appropriate, to ensure: 1) products and services meet or exceed customers' expectations; 2) management support for planning, organization, resources, direction, and control; 3) performance and quality improvement thorough rigorous assessment and corrective action and; and 4) environmental, safety, and health risks and impacts associated with work processes are minimized while maximizing reliability and performance of work products.	BNL has a Quality Assurance (QA) Program in place to implement quality management methodology throughout its management systems and associated processes to: (1) achieve and maintain compliance with applicable environmental, safety, security, and health (ESSH) requirements; (2) continue improvement in ESSH performance; (3) provide a safe and healthy workplace; (4) protect the environment and conserve resources; (5) prevent pollution; (6) provide services and products of the highest quality consistent with the needs, expectations, and resources of our customers; and (7) continuously improve processes, systems, and capabilities to improve operations and increase the value of research products delivered to customers.  Having a comprehensive program ensures that all environmental monitoring data meet QA and quality control requirements. Samples are collected and analyzed using standard operating procedures to ensure representative samples and reliable, defensible data. Quality control in the analytical labs is maintained through daily instrument calibration, efficiency and background checks, and testing for precision and accuracy. Data are verified and validated according to projectspecific quality objectives before they are used to support decision making.	Chapter 9

*(continued on next page)*

CHAPTER 3: COMPLIANCE STATUS

Table 3-1. Federal, State, and Local Environmental Statutes and Regulations Applicable to BNL (concluded).

Regulator: Codified Regulation	Regulatory Program Description	Compliance Status	Report Sections
DOE: Order 435.1 Chg. 2	The Radioactive Waste Management Program objective is to ensure that all DOE radioactive waste is managed in a manner that protects workers, public health and safety, and the environment. Order 435.1 requires all DOE organizations that generate radioactive waste to implement a waste certification program. DOE Laboratories must develop a Radioactive Waste Management Basis (RWMB) Program description, which includes exemption and timeframe requirements for staging and storing both routine and non-routine radioactive wastes.	The BNL Waste Certification Program Plan (WCPP) in the RWMB Program description defines the radioactive waste management program's structure, logic, and methodology for waste certification. New or modified operations or activities that do not fall within the scope of the RWMB Program description must be documented and approved before implementation. The Laboratory's RWMB Program description describes the BNL policies, procedures, plans, and controls demonstrating that the Laboratory has the management systems, administrative controls, and physical controls to comply with DOE Order 435.1 Chg. 2.	2.3.4.3
DOE: Order 436.1	The DOE Departmental Sustainability Order replaces former DOE Orders 450.1A, Environmental Protection Programs, and 430.2B, Departmental Energy, Renewable Energy and Transportation Management. The intent of the new order is to incorporate and implement the requirements of Executive Order (EO) 13514 and to continue compliance with EO 13423 though both of those orders were replaced by EO 13693 "Planning for Federal Sustainability in the Next Decade". However, O 436.1 is still supported by DOE requirements for sound sustainability programs implemented under the DOE 2010 Strategic Sustainability Performance Plan (SSPP). Contractor requirements under the order require preparation of a Site Sustainability Plan and implementation of a sound Environmental Management System (EMS).	In accordance with the requirements of the DOE Strategic Sustainability Performance Plan, BNL has developed and implemented a Site Sustainability Plan. The Goals and Strategic Objectives of the DOE SSPP are tracked and reported on annually. BNL's EMS was officially registered to the ISO 14001:2015 revised standard in 2018.	Chapter 2
DOE: Order 458.1, Change 4	In February 2011, DOE released DOE Order 458.1 Radiation Protection of the Public and Environment, which replaced former Order 5400.5. The order establishes requirements to protect the public and the environment against undue risk from radiation associated with radiological activities conducted under the control of DOE pursuant to the Atomic Energy Act of 1954, as amended. The Order requires the preparation of an Environmental Radiation Protection Plan which outlines how facilities monitor their impacts on the public and environment. Full compliance with the Order was required by August 2012.	In accordance with the requirements of DOE Order 458.1, BNL maintains and implements several plans and programs for ensuring that the management of facilities, wastes, effluents, and emissions does not present a risk to the public, workers, or environment. These plans and programs have existed for decades and were previously implemented under prior DOE Order 5400.5 and in accordance with the current DOE O 435.1, Radioactive Waste Management, and 10 CFR 835. Environmental monitoring plans are well documented, and the results are published annually in BNL's Site Environmental Report, which is prepared in accordance with DOE O 231.1B. The Environmental Radiation Protection Program (ERPP), which was published in September 2012, provides a record of the requirements of DOE O 458.1 and documents how the Laboratory meets these requirements. This document is reviewed annually and updated, as necessary to ensure compliance with this requirement.	Chapters 3, 4, 5, 6, and 8

Notes:  
 CFR = Code of Federal Regulations  
 NYCRR = New York Codes, Rules, and Regulations  
 SCSC = Suffolk County Sanitary Code

environmental evaluations were completed for 156 proposed projects at BNL. One hundred fifty-three projects were considered minor actions requiring no additional documentation. Three projects were addressed by submitting notification forms to DOE, which determined that the projects were covered by existing “Categorical Exclusions” (per 10 CFR 1021) or fell within the scope of a previous environmental assessment. An Environmental Assessment for the Construction and Operation of the Electron-Ion Collider was completed in March 2021 with a Finding of No Significant Impact (FONSI).

### 3.4 PRESERVATION LEGISLATION

The Laboratory is subject to several cultural resource laws, most notably the National Historic Preservation Act and the Archeological Resource Protection Act. These laws require agencies to consider the effects of proposed federal actions on historic structures, objects, and documents, as well as cultural or natural places important to Native Americans or other ethnic or cultural groups.

BNL has 33 structures or sites that are eligible for listing on the National Register of Historic Places: the Brookhaven Graphite Research Reactor (BGRR) complex (Buildings 701, 703, and 801), the High Flux Beam Reactor (HFBR) complex (Building 750, 750A, and 751), two 1960s-era efficiency apartments (Buildings 364 and 365), Berkner Hall (Building 488), Medical Complex (Buildings 490 and 491), Chemistry (Building 555), Physics (Building 510), Computational Sciences (Building 515), Instrumentation (Building 535), Accelerator Test Facility (Buildings 820, 820A, and 820B), Environment, Biology, Nuclear Science & Nonproliferation Research (Building 830), Magnet Division (Building 902), the Alternating Gradient Synchrotron Complex (Buildings 901, 901A, 911, 912, 913, 913A-E, and 930), the World War-II (WWII) barracks portion of Building 120, the WWII-era Water Tower, and the WWI Army training trenches associated with Camp Upton. Cultural resource activities are described in Chapter 6.

### 3.5 CLEAN AIR ACT (CAA)

The objectives of the CAA, which is administered by EPA and NYSDEC, are to improve or

maintain regional ambient air quality through operational and engineering controls on stationary or mobile sources of air pollution. Both conventional and hazardous air pollutants are regulated under the CAA.

#### 3.5.1 Conventional Air Pollutants

The Laboratory has a variety of conventional, nonradioactive air emission sources that are subject to federal or state regulations. The following subsections describe the more significant sources, and the methods used by BNL to comply with the applicable regulatory requirements.

##### 3.5.1.1 Boiler Emissions

BNL has four boilers (Nos. 1A, 5, 6, and 7) at the Central Steam Facility (CSF) that are subject to NYSDEC Reasonably Available Control Technology (RACT) requirements. Three of the boilers can burn either residual fuel oil or natural gas; Boiler 1A burns fuel oil only. In 2021, natural gas was the predominant fuel burned at the CSF. For boilers with maximum operating heat inputs greater than or equal to 25 MMBtu/hr. (7.3 MW), the RACT requirements establish emission standards for oxides of nitrogen (NO<sub>x</sub>). The NO<sub>x</sub> RACT standard for the combustion of natural gas and No. 6 oil burned in the Laboratory’s three large boilers (Nos. 5, 6, and 7) is 0.15 lbs./MMBtu for both fuels. The NO<sub>x</sub> RACT emission limit for the CSF’s one mid-size boiler (No. 1A) is 0.20 lbs./MMBtu.

Boilers with a maximum operating heat input between 25 and 250 MMBtu/hr. (7.3 and 73.2 MW) can demonstrate compliance with the NO<sub>x</sub> standard using periodic emission tests or by using continuous emission monitoring equipment; all four CSF boilers fall in this operating range. Boilers 6 and 7 use continuous emission monitoring systems (CEMS) to demonstrate compliance with NO<sub>x</sub> standards. Because past emissions testing and CEMS results when No. 6 oil was burned have shown that CSF boilers 5, 6, and 7 cannot meet the new lower NO<sub>x</sub> RACT standards effective as of July 2014, BNL uses an approved system averaging plan to demonstrate compliance in quarterly reports submitted to NYSDEC.

The Laboratory also maintains continuous opacity monitors for Boilers 6 and 7. These

CHAPTER 3: COMPLIANCE STATUS

Table 3-2. BNL Environmental Permits

Issuing Agency	Bldg. or Facility	Process/Permit Description	Permit ID No.	Expiration or Completion	Emission Unit ID	Source ID
EPA - NESHAPs	510	Calorimeter Enclosure	BNL-689-01 <sup>1</sup>	None	NA	NA
EPA - NESHAPs	705	Tritium Evaporator	BNL-288-01 <sup>1</sup>	None	NA	NA
EPA - NESHAPs	820	Accelerator Test Facility	BNL-589-01	None	NA	NA
EPA - NESHAPs	AGS	AGS Booster - Accelerator	BNL-188-01	None	NA	NA
EPA - NESHAPs	RHIC	Accelerator	BNL-389-01	None	NA	NA
EPA - NESHAPs	931	Brookhaven LINAC Isotope Producer	BNL-2009-1	None	NA	NA
EPA - NESHAPs	REF	Radiation Effects/Neutral Beam	BNL-789-01	None	NA	NA
EPA - NESHAPs	RTF	Radiation Therapy Facility	BNL-489-01 <sup>1</sup>	None	NA	NA
NYSDEC - Air Equivalency	517/518	South Boundary/Middle Road System	1-51-009	NA	NA	NA
NYSDEC - Air Equivalency	598	OU I Remediation System	1-52-009	NA	NA	NA
NYSDEC - Air Equivalency	539	Western South Boundary System	1-52-009	NA	NA	NA
NYSDEC - Air Equivalency	TR 867	T-96 Remediation System	1-52-009	NA	NA	NA
NYSDEC - Air Equivalency	644	Freon-11 Treatment System	1-52-009	NA	NA	NA
NYSDEC - SPDES Equivalency	517/518	South Boundary/Middle Road System	1-52-009	NA	NA	NA
NYSDEC - SPDES Equivalency	539	Western South Boundary System	1-52-009	NA	NA	NA
NYSDEC - SPDES Equivalency	670	Sr-90 Treatment System - Chemical Holes	1-52-009	25-Feb-23	NA	NA
NYSDEC - SPDES Equivalency	OS-4	Airport/LIPA Treatment System	1-52-009	NA	NA	NA
NYSDEC - SPDES Equivalency	OS-5	North St./North St. East Treatment System	1-52-009	26-Mar-25	NA	NA
NYSDEC - SPDES Equivalency	OS-6	Ethylene Di-Bromide Treatment System	1-52-009	26-Mar-25	NA	NA
NYSDEC - SPDES Equivalency	855	Sr-90 Treatment System - BGRW/WCF	1-52-009	26-Mar-25	NA	NA
NYSDEC - SPDES Equivalency	TR 867	T-96 Remediation System	1-52-009	20-Mar-22	NA	NA
NYSDEC - SPDES Equivalency	644	Freon-11 Treatment System	1-52-009	20-Mar-22	NA	NA
NYSDEC - SPDES Equivalency	OS-2	Industrial Park Treatment System	1-52-009	26-Mar-25	NA	NA
NYSDEC - Hazardous Substance	BNL	Bulk Storage Registration Certificate	1-000263	27-Jul-23	NA	NA
NYSDEC - LI Well Permit	BNL	Domestic Potable/Process Wells	1-4722-00032/00151	17-Jul-26	NA	NA
NYSDEC - Air Quality	423	Metal Parts Cleaning Tanks (2)	1-4722-00032/00115	30-Jan-25	U-METAL	42307-08
NYSDEC - Air Quality	423	Gasoline & E85 Storage and Fuel Pumps	1-4722-00032/00115	30-Jan-25	U-FUELS	42309-10
NYSDEC - Air Quality	423	Motor Vehicle A/C Servicing	1-4722-00032/00115	30-Jan-25	U-MVACS	MVAC2
NYSDEC - Air Quality	423	Motor Vehicle A/C Servicing	1-4722-00032/00115	30-Jan-25	U-MVACS	MVAC5
NYSDEC - Air Quality	244	Paint Spray Booth	1-4722-00032/00115	30-Jan-25	U-PAINT	24402
NYSDEC - Air Quality	244	Flammable Liquid Storage Cabinet	1-4722-00032/00115	30-Jan-25	U-PAINT	244AE
NYSDEC - Air Quality	734	Spin Coating Operation	1-4722-00032/00115	30-Jan-25	U-INSIG	734AA
NYSDEC - Air Quality	801	Target Processing Laboratory	1-4722-00032/00115	30-Jan-25	U-INSIG	80101
NYSDEC - Air Quality	Site	Aerosol Can Processing Units	1-4722-00032/00115	30-Jan-25	U-INSIG	AEROS
NYSDEC - Air Quality	498	Aqueous Cleaning Facility	1-4722-00032/00115	30-Jan-25	U-METAL	49801
NYSDEC - Air Quality	610	Combustion Unit	1-4722-00032/00115	30-Jan-25	U-61005	61005
NYSDEC - Air Quality	610	Combustion Unit	1-4722-00032/00115	30-Jan-25	U-61006	61006
NYSDEC - Air Quality	610	Combustion Unit	1-4722-00032/00115	30-Jan-25	U-61007	61007
NYSDEC - Air Quality	610	Metal Parts Cleaning Tray	1-4722-00032/00115	30-Jan-25	U-METAL	61008
NYSDEC - Air Quality	610	Combustion Unit	1-4722-00032/00115	30-Jan-25	U-61005	61005
NYSDEC - Air Quality	610	Combustion Unit	1-4722-00032/00115	30-Jan-25	U-61006	61006
NYSDEC - Air Quality	610	Combustion Unit	1-4722-00032/00115	30-Jan-25	U-61007	61007
NYSDEC - Air Quality	610	Metal Parts Cleaning Tray	1-4722-00032/00115	30-Jan-25	U-METAL	61008

(continued on next page)



Table 3-2. BNL Environmental Permits (concluded).

Issuing Agency	Bldg. or Facility	Process/Permit Description	Permit ID No.	Expiration or Completion	Emission Unit ID	Source ID
NYSDEC - Air Quality	610	Combustion Unit	1-4722-00032/00115	30-Jan-25	U-61005	6101A
NYSDEC - Air Quality	902	Epoxy Coating/Curing Exhaust	1-4722-00032/00115	30-Jan-25	U-COILS	90206
NYSDEC - Air Quality	922	Electroplating Operation	1-4722-00032/00115	30-Jan-25	U-INSIG	92204
NYSDEC - Air Quality	Site	Commercial Refrigeration Equipment	1-4722-00032/00115	30-Jan-25	U-RFRIG	COMRE
NYSDEC - Air Quality	Site	Packaged A/C Units (16)	1-4722-00032/00115	30-Jan-25	U-RFRIG	PKG01-16
NYSDEC - Air Quality	Site	Reciprocating Chillers (44)	1-4722-00032/00115	30-Jan-25	U-RFRIG	REC01-65
NYSDEC - Air Quality	Site	Rotary Screw Chillers (19)	1-4722-00032/00115	30-Jan-25	U-RFRIG	ROTO1-20
NYSDEC - Air Quality	Site	Split A/C Units	1-4722-00032/00115	30-Jan-25	U-RFRIG	SPL01-02
NYSDEC - Air Quality	Site	Centrifugal Chillers (17)	1-4722-00032/00115	30-Jan-25	U-RFRIG	CEN06-29
NYSDEC - Air Quality	463	Diesel Emergency Generator	1-4722-00032/00115	30-Jan-25	U-GENER	46301
NYSDEC - Air Quality	490	Diesel Emergency Generator	1-4722-00032/00115	30-Jan-25	U-GENER	49006
NYSDEC - Air Quality	515	Diesel Non-Emergency Generator	1-4722-00032/00115	30-Jan-25	U-GENER	51501
NYSDEC - Air Quality	555	Diesel Emergency Generator	1-4722-00032/00115	30-Jan-25	U-GENER	55503
NYSDEC - Air Quality	635	Diesel Emergency Generator	1-4722-00032/00115	30-Jan-25	U-GENER	63501
NYSDEC - Air Quality	734	Diesel Emergency Generator	1-4722-00032/00115	30-Jan-25	U-GENER	73401
NYSDEC - Air Quality	735	Diesel Emergency Generator	1-4722-00032/00115	30-Jan-25	U-GENER	73501
NYSDEC - Air Quality	740	Diesel Emergency Generators (2)	1-4722-00032/00115	30-Jan-25	U-GENER	74001-02
NYSDEC - Air Quality	801	Diesel Emergency Generator	1-4722-00032/00115	30-Jan-25	U-GENER	80102
NYSDEC - Air Quality	912	Diesel Emergency Generators (3)	1-4722-00032/00115	30-Jan-25	U-GENER	912A1-A3
NYSDEC - Air Quality	30	Combustion Unit	1-4722-00032/00115	30-Jan-25	U-SMBLR	030AB
NYSDEC - Air Quality	422	Combustion Unit	1-4722-00032/00115	30-Jan-25	U-SMBLR	422AF
NYSDEC - Air Quality	423	Combustion Unit	1-4722-00032/00115	30-Jan-25	U-SMBLR	42304
NYSDEC - Hazardous Waste	WMF	Waste Management	1-4722-00032/00102	06-Sep-27	NA	NA
NYSDEC - Water Quality	CSF	Major Petroleum Facility	1-1700	31-Mar-22	NA	NA

Notes:  
<sup>1</sup> Source Facility Removed and awaiting EPA termination of NESHAPs authorization.  
 A/C = Air Conditioning  
 AGS = Alternating Gradient Synchrotron  
 BGRR = Brookhaven Graphite Research Reactor  
 CSF = Central Steam Facility  
 EPA = Environmental Protection Agency  
 LIPA = Long Island Power Authority  
 NA = Not Applicable  
 NESHAPs = National Emission Standards for Hazardous Air Pollutants  
 NYSDEC = New York State Department of Environmental Conservation  
 OU = Operable Unit  
 RTF = Radiation Therapy Facility  
 RHIC = Relativistic Heavy Ion Collider  
 SDWA = Safe Drinking Water Act  
 SPDES = State Pollutant Discharge Elimination System  
 Sr-90 = Strontium-90  
 STP = Sewage Treatment Plant  
 WCF = Waste Concentration Facility  
 WMF = Waste Management Facility

monitors measure the transmittance of light through the exhaust gas and report the measurement in percent attenuated. Opacity limitations state that no facility may emit particulates such that the opacity exceeds 20 percent, calculated in six-minute averages, except for one period not to exceed 27 percent in any one hour.

During 2021, there were no recorded exceedances of the NOx RACT limit by the Boiler 6 or Boiler 7 CEMS. Using the system averaging approach, actual weighted average NOx emission rates for operating boilers for the first through fourth quarters were 0.088, 0.109, 0.093, and 0.112 lbs./MMBtu,

respectively, which were below the corresponding quarterly permissible weighted average emissions rate of 0.150 lbs./ MMBtu each quarter.

In 2021, there were seven recorded excess opacity measurements. Two excess opacity readings recorded by the Boiler 6 monitor on February 17 were due to a load shift, and a single Boiler 6 excess opacity reading on March 28 occurred during unusually heavy rainfall believed to have interfered with the transmissometer light path. Two Boiler 7 excess opacity readings on March 15 occurred during contractor maintenance of the opacity monitor, and another two occurred

on June 22 due to start-up/shutdown of the boiler while firing #6 oil in preparation for National Grid utility maintenance of the natural gas supply system. All the excursions were documented in quarterly Site-Wide Air Emissions and Monitoring Systems Performance Reports submitted to NYSDEC. Chapter 4 discusses CSF compliance with NO<sub>x</sub> RACT standards and opacity limits in greater detail.

### 3.5.1.2 Ozone-Depleting Substances

*Refrigerant:* The Laboratory's preventative maintenance program requires regular inspection and maintenance of refrigeration and air conditioning equipment that contains ozone-depleting substances such as R-11, R-12, and R-22. All refrigerant recovery and recycling equipment are certified to meet refrigerant evacuation levels specified by 40 CFR 82.158. As a matter of BNL's standard practice, if a refrigerant leak is found, technicians will either immediately repair the leak or isolate it and prepare a work order for the needed repairs. This practice is more stringent than the leak repair provisions of 40 CFR 82.156. In 2021, 142 pounds of R-22 and 122 pounds of R-123 were recovered and recycled from refrigeration equipment that was serviced. Meanwhile, 98 pounds of R-22, 121 pounds of R-123, and 133 pounds of R-410A leaked from refrigeration and air conditioning equipment on site. These leaks were subsequently reported as emissions in the Annual Emissions Statement transmitted to NYSDEC.

*Halon:* Halon 1211 and 1301 are extremely efficient fire suppressants but are being phased out due to their effect on the earth's ozone layer. Halon recovered from excessed systems is shipped to the Department of Defense Ozone Depleting Substances Reserve in accordance with the Class I Ozone Depleting Substances Disposition Guidelines prepared by the DOE Office of Environmental Policy and Guidance. In 2021, 542 pounds of excess Halon 1301 from decommissioned fire suppression systems in Buildings 449 and 928 were shipped to the Department of Defense Ozone Depleting Substances Reserve. There were no discharges of Halon 1211 from portable fire extinguishers or Halon 1301 from accidental or fire-induced activation of fixed fire suppression systems.

### 3.5.2 Hazardous Air Pollutants

In 1970, the CAA established standards to protect the general public from hazardous air pollutants that may lead to death or an increase in irreversible or incapacitating illnesses. The NESHAPs program was established in 1977 and the governing regulations were updated significantly in 1990. EPA developed NESHAPs to limit the emission of air pollutants; since 1990, EPA has modified the list through rulemaking to include 187 hazardous air pollutants. The program includes a list of regulated contaminants, a schedule for implementing control requirements, aggressive technology-based emission standards, industry-specific requirements, special permitting provisions, and a program to address accidental releases. The following subsections describe BNL's compliance with NESHAPs regulations.

#### 3.5.2.1. Maximum Available Control Technology

Based on the Laboratory's periodic review of Maximum Available Control Technology (MACT) standards in 2021, it has been determined that none of the proposed or newly promulgated MACT standards apply to the emissions from existing permitted operations or the anticipated emissions from proposed activities and operations at BNL.

#### 3.5.2.2 Asbestos

In 2021, the Laboratory notified the EPA Region II office regarding the removal of materials containing asbestos. During the year, 22,800 pounds of both scheduled and non-scheduled friable asbestos from maintenance operations materials and building demolition preparation (e.g., pipe insulation, sheetrock, popcorn ceiling, transite board, floor tiles, water main pipes) were removed and disposed of according to EPA requirements.

#### 3.5.2.3 Radioactive Airborne Emissions

Minor and major sources of radiological airborne emissions from BNL's facilities and activities are evaluated to ensure that they do not impact the environment, on-site workers, or people residing at or near the Laboratory. A full description of radiological emissions monitoring conducted in 2021 is provided in Chapter 4.

BNL transmitted all data pertaining to radioactive air emissions and dose calculations to EPA in fulfillment of its annual reporting requirement. As in past years, the maximum off-site dose due to airborne radioactive emissions from the Laboratory continued to be far below the 10 mrem (100  $\mu$ Sv) annual dose limit specified in 40 CFR 61 Subpart H (see Chapters 4 and 8 for more information on the estimated air dose). Using EPA modeling software, the dose to the maximally exposed off-site individual resulting from BNL's airborne emissions in 2021 was 0.711 mrem (7.1  $\mu$ Sv).

### 3.6 CLEAN WATER ACT

The disposal of wastewater generated by Laboratory operations is regulated under the Clean Water Act (CWA) as implemented by NYSDEC and under DOE Order 458.1, Radiation Protection of the Public and the Environment. The goals of the CWA are to achieve a level of water quality that promotes the propagation of fish, shellfish, and wildlife; to provide waters suitable for recreational purposes; and to eliminate the discharge of pollutants into surface waters. New York State was delegated CWA authority in 1975. NYSDEC has issued a SPDES permit to BNL that regulates wastewater effluents. The permit specifies monitoring requirements and effluent limits for nine of 12 outfalls, as described below. See Figure 5-3 in Chapter 5 for the locations of the following BNL outfalls:

- Outfall 001 is used to discharge treated effluent from the Sewage Treatment Plant (STP) to groundwater recharge basins.
- Outfalls 002, 002B, 003, 005, 006A, 006B, 008, 010, 011, and 012 are recharge basins used to discharge cooling tower blowdown, once-through cooling water, and/or stormwater. Because only stormwater or once-through cooling water is discharged to Outfalls 003, 011, and 012, NYSDEC imposes no monitoring requirements for these discharges.
- Outfall 007 receives backwash water from the Potable Water Treatment Plant filter building.
- Outfall 009 consists of numerous subsurface and surface wastewater disposal systems (e.g., cesspools) that receive predominantly sanitary waste and steam- and air-compressor condensate discharges. NYSDEC does not

require monitoring of these disposal systems.

Each month, the Laboratory prepares Discharge Monitoring Reports (DMRs) that describe monitoring results, evaluate compliance with permit limitations, and identify corrective measures taken to address permit excursions. These reports are submitted electronically to EPA, NYSDEC central and regional offices, and the Suffolk County Department of Health Services (SCDHS) through a Network DMR (NetDMR) system. Details of the monitoring program conducted for the groundwater treatment systems where SPDES equivalency permits are in effect are provided in SER Volume II, Groundwater Status Report. Evaluation of the current effluent quality shows it to consistently meet groundwater effluent standards, and in most cases, ambient water quality standards for surface water. Details on monitoring results, evaluation of compliance with permit limits, and description of any corrective actions taken to address permit excursions are provided in the following sections.

#### 3.6.1 Sewage Treatment Plant

Sanitary and process wastewater generated by BNL operations is conveyed to the STP for processing before discharge to groundwater recharge basins. The STP provides tertiary treatment of the wastewater and includes the following processes: settling/sedimentation, biological reduction of organic matter and nitrogen, and final filtration. Chapter 5 provides a detailed description of the treatment process.

A summary of SPDES monitoring results for the STP discharge at Outfall 001 is provided in Table 3-3, along with relevant SPDES permit limits. The Laboratory monitors the STP discharge for more than 100 parameters monthly and more than 200 parameters quarterly. BNL's overall compliance with effluent limits was greater than 98 percent in 2021.

There were four excursions of SPDES permit limits at Outfall 001 in 2021, all of which involved Tolytriazole (TTA). The effluent limit for TTA (0.05 mg/L) at Outfall 001 was exceeded in January through April 2021. TTA is a stable corrosion inhibitor that produces a protective electrochemical film on metal surfaces to slow the rate of corrosion. It can shield multiple types of metals against corrosion, though it is most commonly used for

CHAPTER 3: COMPLIANCE STATUS

Table 3-3. Analytical Results for Wastewater Discharges to Sewage Treatment Plant Outfall 001.

Analyte	Low Report	High Report	Min. Monitoring. Freq.	SPDES Limit	Exceedances	% Compliance*
pH (SU)	5.9	8.0	Continuous Recorder	Min 5.8, Max. 8.5	0	100
Solids, Total Dissolved (mg/L)	353	556	Monthly	1000	0	100
Total nitrogen (mg/L)	1.8	6.6	Twice Monthly	10	0	100
Total phosphorus (mg/L)	0.6	1.5	Twice Monthly	NA	0	100
Cyanide (mg/L)	< 0.002	< 0.002	Twice Monthly	0.1	0	100
Copper (mg/L)	0.005	0.04	Twice Monthly	0.15	0	100
Iron (mg/L)	0.1	0.31	Twice Monthly	0.6	0	100
Lead (mg/L)	0.001	0.002	Twice Monthly	0.025	0	100
Mercury (ng/L)	3	30	Twice Monthly	200	0	100
Methylene chloride (ug/L)	<2	3.6	Twice Monthly	5	0	100
Nickel (mg/L)	< 0.002	0.003	Twice Monthly	0.1	0	100
Silver (mg/L)	< 0.001	< 0.001	Twice Monthly	0.015	0	100
Toluene (ug/L)	< 1	< 1	Twice Monthly	5	0	100
Zinc (mg/L)	0.02	0.09	Twice Monthly	2	0	100
1,1,1-trichloroethane (ug/L)	< 1	< 1	Twice Monthly	5	0	100
Max. Flow (MGD)	0.19	0.74	Continuous Recorder	2.3	0	100
Avg. Flow (MGD)	0.14	0.32	Continuous Recorder	NA	0	100
HEDP (mg/L)	<0.05	0.25	Monthly	0.5	0	100
Tolytriazole (mg/L)	< 0.05	0.48	Monthly	0.05	4	67

Notes: Notes:

See Figure 5-3 for location of Outfall 001.

\* % Compliance = total no. samples – total no. exceedances/total no. of samples x 100

HEDP = 1-hydroxyethylidene diphosphonic acid

MGD = million gallons per day

NA = Not Applicable

SPDES = State Pollutant Discharge Elimination System

SU = standard unit

copper and copper alloy systems. TTA is the industry standard for this type of protection and BNL uses it throughout the site to protect valuable machinery and equipment from the corrosive conditions found in harsh operating environments, such as cooling towers.

Despite many efforts to address TTA SPDES permit limit issues over the past few years, BNL continues to be challenged in routinely meeting the current discharge limit due to the large number of operating cooling water systems that require water treatment chemicals like TTA to prevent corrosion and the need to maintain compliance with New York State Department of Health Legionella Disease prevention regulations. Among the multiple corrective actions taken to date, BNL decided to temporarily turn off all the corrosion inhibitor pumps serving cooling towers

that are not currently on TTA-free inhibitor. This action resulted in achieving permit compliance for TTA the rest of the calendar year.

On August 17, 2021, the Laboratory officially received a Notice of Violation (NOV) for continuing violation of the permit limit for TTA. A formal non-compliance report, which included a corrective action plan, was submitted to NYSDEC on September 16, 2021. This corrective action plan included background information on the issue, a description of all non-compliances, causes of TTA exceedances, immediate and preventative (long-term) corrective actions taken, and any proposed future actions. One of the actions proposed that was initiated prior to the end of 2021 was the procuring of an environmental consulting firm to provide engineering services to evaluate the management, alternatives, and possible treatment of TTA.

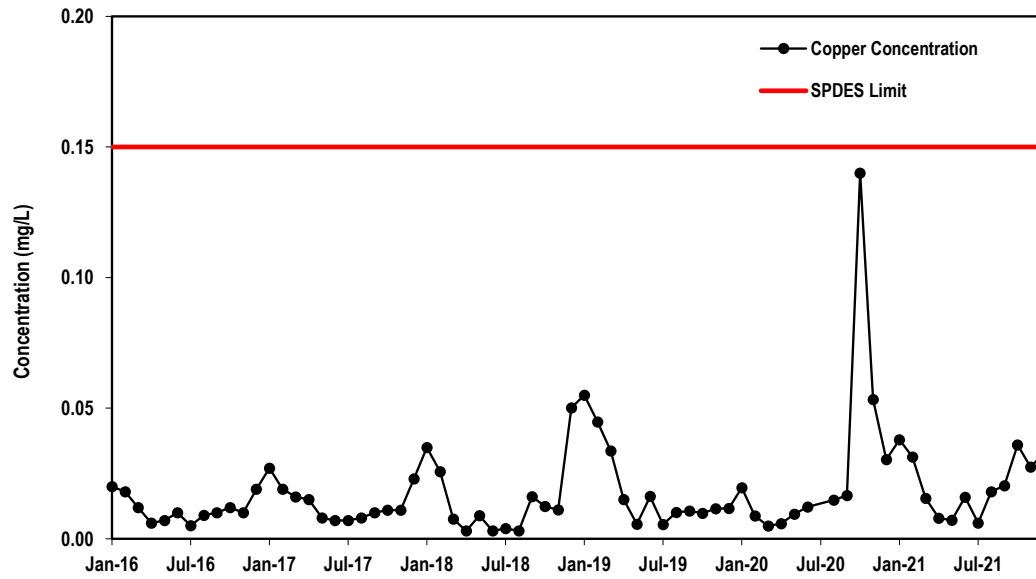


Figure 3-1. Maximum Concentrations of Copper Discharged from the BNL Sewage Treatment Plant, 2016–2021.

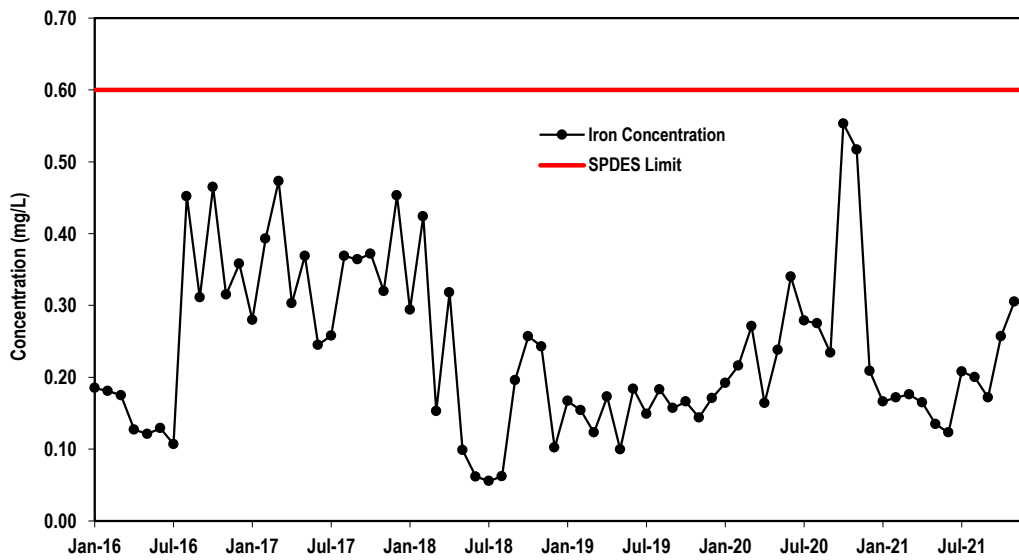


Figure 3-2. Maximum Concentrations of Iron Discharged from the BNL Sewage Treatment Plant, 2016–2021.



CHAPTER 3: COMPLIANCE STATUS

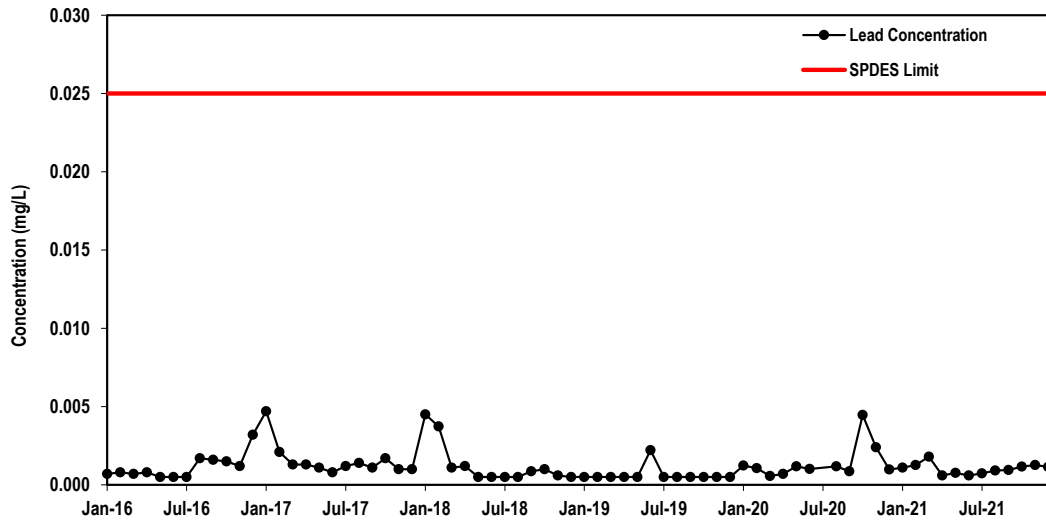


Figure 3-3. Maximum Concentrations of Lead Discharged from the BNL Sewage Treatment Plant, 2016–2021.

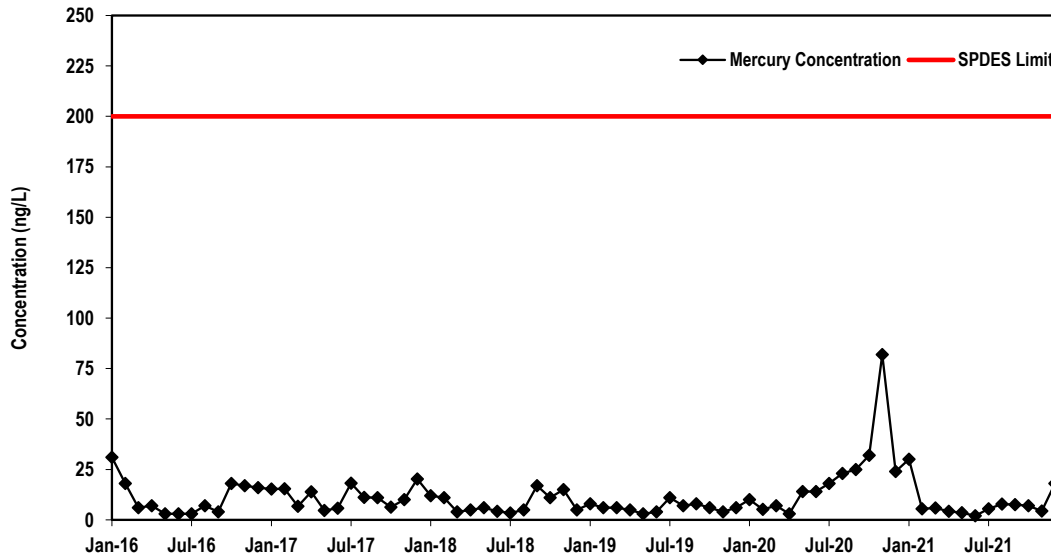


Figure 3-4. Maximum Concentrations of Mercury Discharged from the BNL Sewage Treatment Plant, 2016–2021.

Figure 3-5. Maximum Concentrations of Nickel Discharged from the BNL Sewage Treatment Plant, 2016–2021.

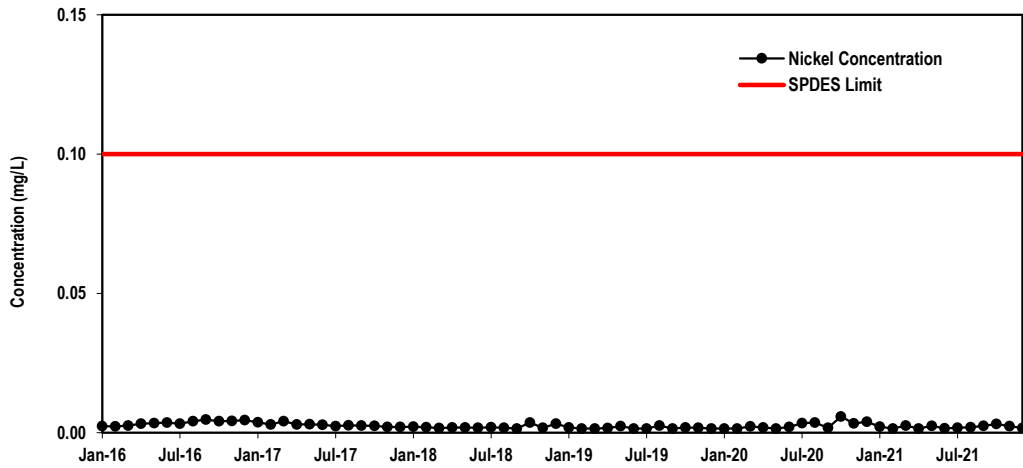


Figure 3-6. Maximum Concentrations of Silver Discharged from the BNL Sewage Treatment Plant, 2016–2021.


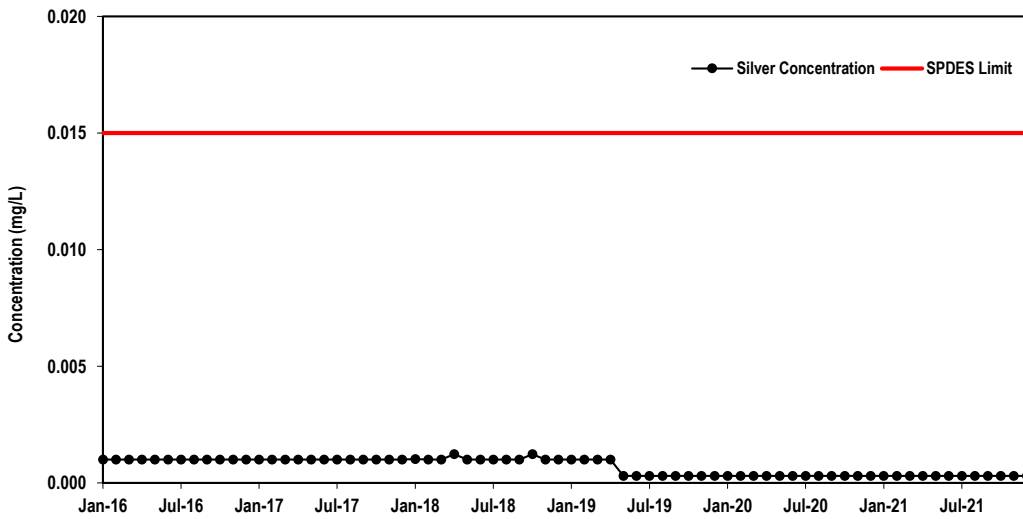


Figure 3-7. Maximum Concentrations of Zinc Discharged from the BNL Sewage Treatment Plant, 2016–2021.

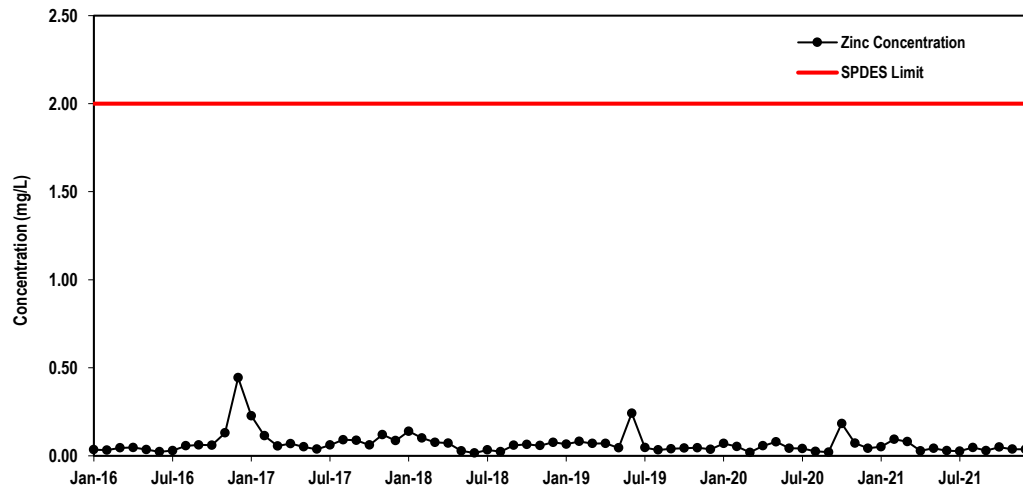

Figures 3-1 through 3-7 plot the five-year trends for monthly concentrations of copper, iron, lead, mercury, nickel, silver, and zinc in the STP discharge.

### 3.6.2 Recharge Basins and Stormwater

Water discharged to Outfalls 002 through 008 and Outfalls 010 through 012 recharges to groundwater. Monitoring requirements for each of these discharges vary, depending on the type of wastewater received and the type of cooling water treatment reagents used. Table 3-4 summarizes the monitoring requirements and performance results.

In 2021, there were three non-compliances reported and all were for TTA exceedances. Two exceedances occurred at Outfall 002 (HN) and one at Outfall 006B (HT-E). The causes of these exceedances and resulting corrective actions are similar to those described in Section 3.6.1 for the Sewage Treatment Plant.

### 3.7 SAFE DRINKING WATER ACT

The extraction and distribution of drinking water are regulated under the federal Safe Drinking Water Act (SDWA). In New York State, implementation of the SDWA is delegated to the New York State Department of Health (NYSDOH) and administered locally by SCDHS. Because BNL provides potable water to more than 25 full-time residents, it is subject to the same requirements as a municipal water supplier. Monitoring requirements are prescribed annually by SCDHS, and a Potable Water Sampling and Analysis Plan (Bruno 2021) is prepared by the Laboratory to comply with these requirements.

#### 3.7.1 Potable Water

The Laboratory has six water supply wells for on-site distribution of potable water, three of which were active during 2021. As required by NYSDOH regulations, BNL monitors the potable wells regularly for bacteria, inorganics, organics, and pesticides. The Laboratory also voluntarily monitors drinking water supplies for radiological contaminants yearly. Tables 3-5 and 3-6 provide potable water supply monitoring data. BNL's drinking water and the supply and distribution system were in full compliance with all applicable

county, state, and federal regulations regarding drinking water quality, monitoring, operations, and reporting in 2021.

In 2013, the EPA required large water providers to start testing for six common Per- and Poly-fluoroalkyl Substances (PFAS) chemicals under the third Unregulated Contaminant Monitoring Rule (UCMR 3). As a medium-size system, BNL was not required to participate in this testing program. In 2017, SCDHS began routine testing of all water supply systems for PFAS, including BNL. PFAS chemicals were detected in three of BNL's water supply wells. In these initial tests, Perfluorooctanoic Acid (PFOA) and Perfluorooctanesulfonic Acid (PFOS) were detected at concentrations below the current EPA Health Advisory Level of 70 ng/L (ppt) that was established specifically for the combined concentration of these two chemicals. Following repeated confirmed detections of PFAS in the supply wells, the Lab started routine quarterly testing for PFAS in 2018. The results for 2021 are provided in Table 3-6.

In 2020, New York State established enforceable drinking water standards for PFOS and PFOA at concentrations of 10 ng/L (ppt). The other four PFAS chemicals would continue to be regulated under the current New York State limit of 50 µg/L (ppb) for unregulated contaminants. In May 2020, Granular Activated Carbon (GAC) filters were restored on Well 11 to remove PFOS and low levels of the other PFAS chemicals that may be present. In May 2021, GAC filters were restored on Well 10. Construction began to restore Well 12 and its GAC filters into service during 2022.

To ensure that consumers are informed about the quality of Laboratory-supplied potable water, BNL publishes a Consumer Confidence Report (CCR) in May of each year, a deadline stipulated by the SDWA. This report provides information regarding source water supply system and the analytical tests conducted, and detected contaminants are compared to federal drinking water standards. The CCR also describes the measures the Laboratory takes to protect its water source and limit consumer exposure to contaminants. The CCR is distributed to all BNL employees and on-site residents, either in paper form or electronically at <http://www.bnl.gov/water/>.

Table 3-4. Analytical Results for Wastewater Discharges to Outfalls 002, 005 - 008, and 010.

Analyte	Outfall 002	Outfall 002B	Outfall 005	Outfall 006A	Outfall 006B	Outfall 007	Outfall 008	Outfall 010	SPDES Limit	No. of Exceedances	% Compliance*
Flow (MGD)	N	CR	CR	CR	CR	CR	10	10			
	Min.	0	0.17	0.07	0	0.04	0	0	NA		
	Max.	2.86	0.09	0.59	0.23	0.01	0.45	0.3	NA	NA	NA
pH (SU)	Min.	7.3	6.3	6.0	7.6	7.0	6.2	7.0	NA		
	Max.	8.6	8.7	8.4	8.6	8.2	8.9	8.4	8.5, 9.0 (a)	0	100
Oil and Grease (mg/L)	N	12	12	12	10	NR	10	10			
	Min.	< 1.1	< 1.1	< 1.1	< 1.1	NR	< 1.1	1.1	NA		
	Max.	1.2	2.7	1.4	1.2	1.4	1.5	2.3	15	0	100
Copper (mg/L)	N	NR	NR	4	NR	NR	NR	4			
	Min.	NR	NR	0.001 (T)	NR	NR	NR	< 0.001 (D)	NA		
	Max.	NR	NR	0.002 (T)	NR	NR	NR	0.003 (D)	1.0	0	100
Aluminum (mg/L)	N	4	NR	NR	NR	NR	4	4			
	Min.	< 0.07 (T)	NR	NR	NR	NR	0.07 (D)	< 0.07 (D)	NA		
	Max.	0.1 (T)	NR	NR	NR	NR	< 0.07 (D)	< 0.07 (D)	2.0	0	100
Lead, Dissolved (mg/L)	N	NR	NR	NR	NR	NR	NR	4			
	Min.	NR	NR	NR	NR	NR	NR	< 0.0005	NA		
	Max.	NR	NR	NR	NR	NR	NR	< 0.001	0.05	0	100
Vanadium, Dissolved (mg/L)	N	NR	NR	NR	NR	NR	NR	4			
	Min.	NR	NR	NR	NR	NR	NR	0.002	NA		
	Max.	NR	NR	NR	NR	NR	NR	0.004	NPL	NA	NA
Chloroform (µg/L)	N	4	NR	NR	NR	NR	NR	NR			
	Min.	< 1.0	NR	NR	NR	NR	NR	NR	NA		
	Max.	< 1.0	NR	NR	NR	NR	NR	NR	7	0	100
Bromodichloromethane (µg/L)	N	4	NR	NR	NR	NR	NR	NR			
	Min.	< 1.0	NR	NR	NR	NR	NR	NR	NA		
	Max.	< 1.0	NR	NR	NR	NR	NR	NR	50	0	100
1,1,1-trichloroethane (µg/L)	N	4	NR	NR	NR	NR	10	NR			
	Min.	< 1.0	NR	NR	NR	NR	< 1.0	NR	NA		
	Max.	< 1.0	NR	NR	NR	NR	< 1.0	NR	5	0	100
1,1-dichloroethane (µg/L)	N	NR	NR	NR	NR	NR	10	NR			
	Min.	NR	NR	NR	NR	NR	< 1.0	NR	NA		
	Max.	NR	NR	NR	NR	NR	< 1.0	NR	5	0	100





Table 3-5. Potable Water Wells and Potable Distribution System: Analytical Results (Maximum Concentration, Minimum pH Value)

Compound	Well No. 4	Well No. 6	Well No. 7	Well No. 10	Well No. 11	Potable Distribution Sample	NYS DWS
<b>Water Quality Indicators</b>							
Ammonia (mg/L)	< 0.1	< 0.1	0.1	< 0.1	< 0.1	< 0.1	SNS
Chlorides (mg/L)	11.2	30.8	60.4	86.4	63	69.6	250
Color (units)	10	60*	20*	5	< 5	5	15
Conductivity (mmhos/cm)	130	150	285	471	393	448	SNS
Cyanide (mg/L)	< 10	< 10	< 10	< 10	< 10	< 10	SNS
MBAS (mg/L)	< 0.08	< 0.08	< 0.08	< 0.08	< 0.08	< 0.08	SNS
Nitrates (mg/L)	< 0.05	0.076	0.32	0.5	0.43	0.47	10
Nitrites (mg/L)	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	1
Odor (units)	0	0	0	0	0	2	3
pH (Standard Units)	6.6	6.5	6.4	8.7	8.8	9.1	SNS
Sulfates (mg/L)	10.6	10.3	8.5	10.4	11.7	10.3	250
Total coliform	ND	ND	ND	ND	ND	1**	Negative
<b>Metals</b>							
Antimony (mg/L)	< 0.4	< 0.4	< 0.4	< 0.4	< 0.4	< 0.4	6
Arsenic (mg/L)	< 1.0	2.3	2.84	< 1.0	< 1.0	< 1.0	50
Barium (mg/L)	0.015	0.024	0.03	0.06	0.05	0.04	2
Beryllium (mg/L)	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3	4
Cadmium (mg/L)	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	5
Chromium (mg/L)	< 0.007	< 0.007	< 0.007	< 0.007	< 0.007	< 0.007	0.1
Copper (mg/L)	0.007	0.04	0.005	0.003	0.004	0.05	1.3
Fluoride (mg/L)	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	2.2
Hexavalent Chromium (mg/L)	NR	NR	NR	0.001	0.001	0.0002	0.05
Iron (mg/L)	0.79*	3.79*	2.5*	< 0.20	0.15	0.05	0.3
Lead (mg/L)	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	10.4	15
Manganese (mg/L)	0.016	0.08	0.13	< 0.010	< 0.010	< 0.010	0.3
Mercury (mg/L)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	2
Nickel (mg/L)	0.002	0.3	0.002	0.001	0.003	<0.0005	SNS
Selenium (mg/L)	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	50
Sodium (mg/L)	8.5	19	33.5	49.4	37.6	56.4	SNS
Silver (mg/L)	< 1	< 1	< 1	< 1	< 1	< 1	100
Thallium (mg/L)	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3	2
Zinc (mg/L)	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	5
<b>Radioactivity</b>							
Gross alpha activity (pCi/L)	<1.97	2.14 ±1.04	<1.93	2.91± 1.48	<1.89	NR	15
Gross beta activity (pCi/L)	<2.1	< 2.62	3.59 ±1.23	2.83±1.04	2.24±1.18	NR	(a)
Strontium-90 (pCi/L)	<0.78	<0.79	<0.79	<0.79	<0.76	NR	8
Tritium (pCi/L)	<511	<506	<509	<509	<508	NR	20,000

(continued on next page)

**Table 3-5. Potable Water Wells and Potable Distribution System: Analytical Results (Maximum Concentration, Minimum pH Value) (concluded).**

Compound	Well No. 4	Well No. 6	Well No. 7	Well No. 10	Well No. 11	Potable Distribution Sample	NYS DWS
<b>Other</b>							
Alkalinity (mg/L)	7.2	7.2	14.7	32.9	27.5	65.9	SNS
Asbestos (M. fibers/L)	NR	NR	NR	NR	NR	<0.05	7
Calcium (mg/L)	5.5	3.6	6.4	14.1	9.4	15.4	SNS
HAA5 (mg/L)	NR	NR	NR	NR	NR	<0.002	0.06***
Residual chlorine - MRDL (mg/L)	NR	NR	NR	NR	NR	1.3	4
TTHM (mg/L)	NR	NR	NR	NR	NR	0.005	0.08***

**Notes:**

See Figure 7-1 for well locations.  
 Well 12 was not operational for 2021; no testing was completed during this time.  
 HAA5 = five haloacetic acids  
 MBAS = methylene blue active substances  
 MRDL = maximum residual disinfectant level  
 ND = not detected  
 NR = analysis not required  
 NS = not sampled  
 NYS DWS = New York State Drinking Water Standard  
 SNS = drinking water standard not specified  
 TTHM = total trihalomethanes

\* Water from these wells is treated at the Water Treatment Plan for color and iron reduction prior to site distribution.

\*\*Positive sample was not confirmed with additional sampling. No violation occurred.

\*\*\* Limit imposed on distribution samples only.

(a) The drinking water standard was changed from 50 pCi/L (concentration based) to 4 mrem/yr (dose based) in late 2003. Gross beta activity does not identify specific radionuclides; therefore, a dose equivalent can not be calculated. No specific nuclides were detected; therefore, compliance with the requirement is demonstrated.

groundwater is treated and then returned to the aquifer via drywells, injection wells, or recharge basins. Discharges to these UICs are authorized by rule rather than by permit. Under the authorized by rule requirements, a separate inventory is maintained for these treatment facilities, and is periodically updated whenever a new device is added or closed.

In 2021, the Laboratory added five UICs – four at Cornell Avenue at Building 480 for improved storm-water area drainage and to prevent building flooding, and one at Building 1006’s parking lot to prevent stormwater ponding and freezing in the colder weather.

BNL’s total UIC inventory at the end of 2021 was 119.

**3.8 PREVENTING AND REPORTING SPILLS**

Federal, state, and local regulations are in place to address the management of storage facilities containing chemicals, petroleum, and other hazardous materials. The regulations include specifications for the design of storage facilities,

requirements for written plans relating to un-planned releases, and requirements for reporting releases that do occur. BNL’s compliance with these regulations is further described in the following sections.

**3.8.1 Preventing Oil Pollution and Spills**

As required by the Oil Pollution Act, BNL maintains a Spill Prevention Control and Countermeasures (SPCC) Plan as a condition of its license to store petroleum fuel (Bruno, 2021). The purpose of this plan is to provide information regarding release prevention measures, the design of storage facilities, and maps detailing storage facility locations. The plan also outlines mitigating and remedial actions that would be taken in the event of a major spill. BNL’s SPCC plan is filed with NYSDEC, EPA, and DOE, and must be updated every five years. BNL remained in full compliance with SPCC requirements in 2021.

**3.8.2 Emergency Reporting Requirements**

The Emergency Planning and Community Right-to-Know Act (EPCRA) and Title III of the

CHAPTER 3: COMPLIANCE STATUS

Table 3-6. Potable Water Wells: Analytical Results for Principal Organic Compounds, Synthetic Organic Chemicals, Pesticides, Micro-Extractables, and Perfluorinated Compounds.

Compound	WTP Effluent	Well No. 4	Well No. 6	Well No. 7	Well No. 10	Well No. 11	NYS DWS
	µg/L						
Dichlorodifluoromethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Chloromethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Vinyl Chloride	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	2
Bromomethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Chloroethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Trichlorofluoromethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,1-dichloroethene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Methylene Chloride	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
trans-1,2-dichloroethene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,1-dichloroethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
cis-1,2-dichloroethene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
2,2-dichloropropane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Bromochloromethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,1,1-trichloroethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Carbon Tetrachloride	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,1-dichloropropene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,2-dichloroethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Trichloroethene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,2-dichloropropane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Dibromomethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
trans-1,3-dichloropropene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
cis-1,3-dichloropropene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,1,2-trichloroethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,3-dichloropropane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Chlorobenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,1,1,2-tetrachloroethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Bromobenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,2,3-trichloropropane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
2-chlorotoluene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
4-chlorotoluene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,3-dichlorobenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,4-dichlorobenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,2-dichlorobenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,2,4-trichlorobenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Hexachlorobutadiene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Tetrachloroethene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,1,1,2-Tetrachloroethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,2,3-trichlorobenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Benzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Toluene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Ethylbenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
m,p-xylene	< 1	< 1	< 1	< 1	< 1	< 1	5
o-xylene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Styrene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Isopropylbenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
n-propylbenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,3,5-trimethylbenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5

(continued on next page)

CHAPTER 3: COMPLIANCE STATUS

Table 3-6. Potable Water Wells: Analytical Results for Principal Organic Compounds, Synthetic Organic Chemicals, Pesticides, Micro-Extractables, and Perfluorinated Compounds. (continued).

Compound	WTP Effluent	Well No. 4	Well No. 6	Well No. 7	Well No. 10	Well No. 11	NYS DWS
	µg/L						
Chlorodifluoromethane	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Tert-butylbenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
1,2,4-trimethylbenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
sec-butylbenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
4-Isopropyltoluene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
n-butylbenzene	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5
Chloroform	3.5	1.1	0.8	1.0	1.3	4.5	50
Bromodichloromethane	3.2	< 0.5	< 0.5	< 0.5	< 0.5	0.6	50
Dibromochloromethane	6.1	< 0.5	< 0.5	< 0.5	< 0.5	0.7	50
Bromoform	6.7	< 0.5	< 0.5	< 0.5	< 0.5	1.3	50
Methyl tert-butyl ether	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	50
Toxaphene	< 1	< 1	< 1	< 1	< 1	< 1	3
Total PCB's	< 0.4	< 0.4	< 0.4	< 0.4	< 0.4	< 0.4	0.5
2,4,5,-TP (Silvex)	< 0.13	< 0.13	< 0.13	< 0.13	< 0.13	< 0.13	10
Dinoseb	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	50
Dalapon	< 0.7	< 0.7	< 0.7	< 0.7	< 0.7	< 0.7	50
Pichloram	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	50
Dicamba	< 1	< 1	< 1	< 1	< 1	< 1	50
Pentachlorophenol	< 0.04	< 0.04	< 0.04	< 0.04	< 0.04	< 0.04	1
Hexachlorocyclopentadiene	< 0.1	0.018	< 0.1	< 0.1	< 0.1	< 0.1	5
Bis(2-ethylhexyl)Phthalate	< 0.6	< 0.6	< 0.6	< 0.6	< 0.6	< 0.6	50
Bis(2-ethylhexyl)Adipate	< 0.6	< 0.6	< 0.6	< 0.6	< 0.6	< 0.6	50
Hexachlorobenzene	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	5
Benzo(A)Pyrene	0.029	< 0.02	< 0.02	< 0.02	< 0.02	< 0.02	50
Aldicarb Sulfone	< 0.8	< 0.8	< 0.8	< 0.8	< 0.8	< 0.8	SNS
Aldicarb Sulfoxide	< 0.5	< 0.5	< 0.5	< 0.5	1.1	1.1	SNS
Aldicarb	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	SNS
Oxamyl	< 1	< 1	< 1	< 1	< 1	< 1	50
3-Hydroxycarbofuran	< 1	< 1	< 1	< 1	< 1	< 1	50
Carbofuran	< 0.9	< 0.9	< 0.9	< 0.9	< 0.9	< 0.9	40
Carbaryl	< 1	< 1	< 1	< 1	< 1	< 1	50
Methomyl	< 1	< 1	< 1	< 1	< 1	< 1	50
Glyphosate	< 6	< 6	< 6	< 6	< 6	< 6	50
Diquat	< 0.4	< 0.4	< 0.4	< 0.4	< 0.4	< 0.4	50
1,2-dibromoethane (EDB)	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	0.05
1,2-dibromo-3-chloropropane	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	0.2
Lindane	< 0.02	< 0.02	< 0.02	< 0.02	< 0.02	< 0.02	0.2
Heptachlor	< 0.025	< 0.025	< 0.025	< 0.025	< 0.025	< 0.025	0.4
Aldrin	< 0.025	< 0.025	< 0.025	< 0.025	< 0.025	< 0.025	5
Heptachlor Epoxide	< 0.02	< 0.02	< 0.02	< 0.02	< 0.02	< 0.02	0.2
Dieldrin	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	5
Endrin	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	0.2
Methoxychlor	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	40
Chlordane	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	2
2,4,-D	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	50
Alachlor	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	2
Simazine	< 0.07	< 0.07	< 0.07	< 0.07	< 0.07	< 0.07	50

(continued on next page)

**Table 3-6. Potable Water Wells: Analytical Results for Principal Organic Compounds, Synthetic Organic Chemicals, Pesticides, Micro-Extractables, and Perfluorinated Compounds (concluded).**

Compound	WTP Effluent	Well No. 4	Well No. 6	Well No. 7	Well No. 10	Well No. 11	NYS DWS
	µg/L						
Atrazine	<0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	3
Metolachlor	<1	<1	<1	<1	<1	<1	50
Chlordane	<0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	2
2,4,-D	<0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	50
Alachlor	<0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	2
Simazine	<0.07	< 0.07	< 0.07	< 0.07	< 0.07	< 0.07	50
Atrazine	<0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	3
Metolachlor	<1	<1	<1	<1	<1	<1	50
Metribuzin	<0.5	< 0.15	< 0.15	< 0.15	< 0.15	< 0.15	50
Butachlor	<1	<1	<1	<1	<1	<1	50
Endothall	<9	< 9	< 9	< 9	< 9	< 9	100
Propachlor	<1	<1	<1	<1	<1	<1	50
Freon-113	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	50
Perfluorobutanesulfonic Acid (PFBS)	<0.002	<0.002	0.002	<0.002	0.003	0.001	50
Perfluoroheptanoic Acid (PFHpA)	<0.002	<0.002	0.002	<0.002	0.002	0.001	50
Perfluorohexanesulfonic Acid (PFHxS)	<0.002	<0.002	0.002	0.001	0.019	0.007	50
Perfluorooctanoic Acid (PFOA) (ng/L)*	0.7	<2	3.94	1	6.6**	3.8***	10
Perfluorooctanesulfonic Acid (PFOS) (ng/L)*	1.88	0.8	3.21	1.71	37.1**	10.4***	10
Perfluorononanoic Acid (PFNA)	<0.002	<0.002	<0.002	<0.002	0.002	0.001	50
1,4 dioxide	0.05	< 0.02	0.03	0.05	0.06	0.04	1

**Notes:**

See Figure 7-1 for well locations.

For compliance determination with New York State Department of Health standards, potable water samples were analyzed quarterly for Principal Organic Compounds and annually for other organics by Pace Labs, a New York State-certified contractor laboratory.

The minimum detection limits for principal organic compound analytes are 0.5 mg/L. Minimum detection limits for synthetic organic chemicals and micro-extractables are compound-specific, and, in all cases, are less than the New York State Department of Health drinking water standard.

\* Compounds results are reported in ng/L

\*\* Well 10 was active under a deferral from the NYSDOH while the GAC system was installed and finalized in May 2021.

\*\*\*Well 11 data is raw water data. Water was run through a GAC system and samples were below the detection limit.

Well 12 was offline and remained unused during 2021.

SNS = drinking water standard not specified

NYS DWS = New York State Drinking Water Standard

WTP = Water Treatment Plant

Superfund Amendments and Reauthorization Act require that facilities report inventories and releases of certain chemicals that exceed specific release thresholds. Community Right-to-Know requirements are codified under 40 CFR Parts 355, 370, and 372. Table 3-7 summarizes the applicability of the regulations to BNL.

The Laboratory complied with these requirements through the submittal of Tier II and Tier III Reports required under EPCRA Sections 302, 303, 311, 312, and 313. In fulfillment of the Tier II requirements, BNL submitted an inventory of 38 on-site chemicals (with thresholds greater than 10,000 pounds or 500 pounds for acutely

toxic materials) via E-Plan, the New York State-approved computer-based submittal program. The chemicals ranged from road salt (about 1,225 tons) to Portland cement (about 10,500 pounds). Many of these items are fuels and water treatment chemicals. To satisfy the requirements of the Tier III submittal, the Laboratory submitted its data via the EPA-approved TRI-ME computer-based submittal program.

During 2021, BNL reported releases of lead (about 28,000 pounds), mercury (about ten pounds), polychlorinated biphenyls (PCBs) (about three pounds), benzo(g,h,i)perylene (less than one pound), polycyclic aromatic compounds (less



than one pound), and friable asbestos (about 23,000 pounds). Releases of lead, PCBs, mercury, and asbestos were predominantly in the form of shipments of waste for off-site recycling or disposal. Releases of benzo(g,h,i) perylene and polycyclic aromatic compounds were as byproducts of the combustion of fuel oils. In 2021, there were no releases of extremely hazardous substances reportable under Part 304.

**3.8.3 Spills and Releases**

When a spill of hazardous material occurs, Laboratory and contractor personnel are required to immediately notify the BNL Fire Rescue Group, whose members are trained to respond to such releases. Fire Rescue’s initial response is to contain and control any release and to notify additional response personnel (e.g., BNL environmental professionals, industrial hygienists, etc.). Environmental professionals reporting to the scene assess the spill for environmental impact and determine if it is reportable to regulatory agencies. Any release of petroleum products to soil must be reported to both NYSDEC and SCDHS, and any release affecting surface water is also reported to the EPA National Response Center. In addition, a release of more than five gallons of petroleum product to impermeable surfaces or containment areas must be reported to NYSDEC and SCDHS. Spills of chemicals in quantities greater than the CERCLA-reportable limits must be reported to the EPA National Response Center, NYSDEC, and SCDHS. Remediation of spills is conducted, as necessary, to prevent impacts to the environment, minimize human health exposures, and restore the site.

There were ten spills in 2021 and three of those spills met regulatory agency reporting criteria. The remaining spills were small-volume releases either to containment areas or to other impermeable surfaces that did not exceed a reportable quantity. Table 3-8 summarizes each of the three reportable events, including a description of the cause and corrective actions taken. Figure 3-8 is a five-year trend of spills that have occurred at BNL. The decreasing number of spills over the past couple of years is most likely due to fewer activities occurring on site because of COVID-19.


There were no long-term effects from these releases and no significant impact on the environment. In all instances, any recoverable material was removed, spill absorbents were used to remove the residual product, and all materials were collected and containerized for off-site disposal. For releases to soil, contaminated soil was removed to the satisfaction of the State inspector and containerized for off-site disposal.

**3.8.4 Major Petroleum Facility (MPF) License**

The storage and transfer of 1.9 million gallons of fuel oil (principally No. 6 oil) subjects the Laboratory to MPF licensing by NYSDEC. The fuel oil used at the CSF to produce high-pressure steam to heat and cool BNL facilities is stored in five tanks with capacities ranging from 300,000 to 600,000 gallons. The remaining storage facilities at BNL have capacities that range from 100 to 10,000 gallons and are located throughout the site where there is a need for building heat, emergency power, fuel, or other miscellaneous petroleum needs (e.g., motor oil, used oil, lube oil, biodiesel).

There are currently 58 petroleum storage facilities listed on the license, not including a large bulk tank that has been permanently closed (Tank No. 611-09). BNL remained in full compliance with MPF license requirements in 2021, which include monitoring groundwater near

**Figure 3-8. Spills Trend 2017-2021.**

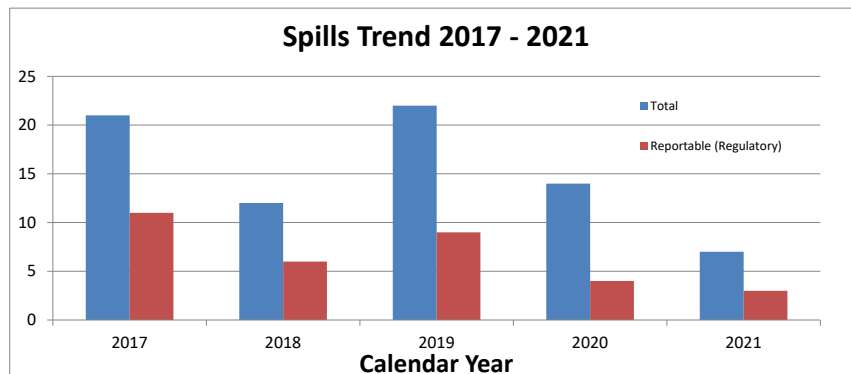

**Table 3-7. Applicability of EPCRA to BNL.**

Applicability of EPCRA to BNL				
EPCRA 302–303	Planning Notification	YES [X]	NO [ ]	NOT REQUIRED [ ]
EPCRA 304	EHS Release Notification	YES [ ]	NO [ ]	NOT REQUIRED [X]
EPCRA 311–312	MSDS/Chemical Inventory	YES [X]	NO [ ]	NOT REQUIRED [ ]
EPCRA 313	TRI Reporting	YES [X]	NO [ ]	NOT REQUIRED [ ]

six above-ground storage tanks at the MPF. The license also requires the Laboratory to inspect the storage facilities monthly, test the tank leak detection systems, and ensure high-level monitoring and secondary containment is functional. Tank integrity is also checked periodically. Groundwater monitoring consists of monthly checks for the presence of floating products and twice-yearly analyses for VOCs and semi-volatile organic compounds (SVOCs). In 2021, no VOCs or floating products attributable to MPF activities were detected above detectable limits. However, two SVOCs were found above NYS Ambient Water Quality Standards – phenols and naphthalene that were most likely attributable to a cross-contamination issue at a third-party analytical lab that performed the testing. See SER Volume II, Groundwater Status Report, for additional information on groundwater monitoring results.

There was no NYSDEC inspection of registered Petroleum Bulk Storage Facilities in 2021 due to the COVID-19 pandemic.

The refurbished Storage Facility STO651 berm performed adequately in 2021, the digital fuel gauges for all three tanks have been calibrated as per the manufacturer’s recommendations, and two of the three tanks have been cleaned and tightness tested with passing results.

In December of 2021, the NYSDEC Major Petroleum Facility License was updated and sent to NYSDEC for review. Some new petroleum storage tanks were added, and others were removed or closed as per NYSDEC regulatory requirements. The additions to the license included four double-walled, basin tanks attached to emergency generators located at Building 725 Computer Science Initiative (two units), Building 1005S (one unit), and Building 653 Well House 12 (one unit). The tank closures included three “Lube-Cube” type, double-walled tanks that were no longer

needed at Well Houses 4, 6, and 7. Additionally in 2021, Tank No. 4 at the Major Petroleum Facility received an interior epoxy coating and is scheduled to be placed back into service in 2022.

### 3.8.5 Chemical Bulk Storage (CBS)

Title 6 of the Official Compilation of the Codes, Rules, and Regulations of the State of New York (NYCRR) Part 596 requires that all aboveground tanks larger than 185 gallons and all underground tanks that store specific chemicals are registered with NYSDEC. The Laboratory holds a Hazardous Substance Bulk Storage Registration Certificate for six tanks that store treatment chemicals for potable water (sodium hydroxide and sodium hypochlorite). The tanks range in capacity from 200 to 1,000 gallons.

There was no NYSDEC regulatory inspection of the Lab’s CBS-registered tanks in 2021 due to the pandemic.

In 2021, all NYSDEC-registered CBS tanks underwent the required Five-Year Tank Inspection, which was performed by a third-party consultant, P.W. Grosser Consulting. The result of the inspection of the four registered tanks in Building 624 (Tank Nos. 624-05/06/07/08) based on service life and overall condition was to perform an additional inspection prior to one-half of the tanks’ remaining service life (September 2022). In lieu of this inspection, the older tanks were replaced with brand-new, double-walled tanks. In December of 2021, the older tanks were formally closed as per NYSDEC requirements and replaced (New Tank Nos. 624-12/13/14/15). An additional recommendation in the above report was to perform an interior inspection of Tank No. 635-04 due to excessive shell thinning and this inspection was scheduled for 2022.

### 3.8.6 County Storage Requirements

Article 12 of the Suffolk County Sanitary Code (SCSC) regulates the storage and handling of toxic and hazardous materials in aboveground or underground storage tanks, drum storage facilities, piping systems, and transfer areas. Article 12 specifies design criteria to prevent environmental impacts resulting from spills or leaks, and specifies administrative requirements such as identification, registration, and spill reporting procedures. In 1987, the Laboratory entered into a voluntary Memorandum of Agreement with SCDHS, in which DOE and BNL agreed to conform to the environmental requirements of Article 12. In April 2010, due to a directive from NYSDEC asserting its sole jurisdiction over petroleum storage at Major Oil Storage Facilities, SCDHS notified BNL that it will cease permitting activities (e.g., review/approval for new construction and modifications, issuance of operating permits, and registration requirement) for all petroleum bulk storage facilities. In 2011, the Laboratory received further information that indicated SCDHS had ceased applying Article 12 requirements to both petroleum and chemical storage at BNL regardless of whether the storage is regulated by NYSDEC. Currently, there are approximately 122 active storage facilities that are not regulated by NYSDEC that would normally fall under SCSC Article 12 jurisdiction. This includes storage of wastewater and chemicals, as well as storage facilities used to support BNL research.

To ensure that storage of chemicals and petroleum continues to meet Article 12 requirements, BNL will continue to abide by the original 1987 agreement with Suffolk County and will maintain conformance with applicable requirements of Article 12. These requirements include design, operational, and closure requirements for current and future storage facilities. Although the Laboratory will no longer submit new design plans for SCDHS review and approval or continue to perform other administrative activities such as registration of exempt facilities and updates of shared databases, it will continue to inspect all storage facilities to ensure operational requirements of SCDHS Article 12 are maintained.

### 3.9 RCRA REQUIREMENTS

The Resource Conservation and Recovery Act (RCRA) regulates hazardous wastes that, if mismanaged, could present risks to human health or the environment. The regulations are designed to ensure that hazardous wastes are managed from the point of generation to final disposal. In New York State, EPA delegates the RCRA program to NYSDEC with EPA retaining an oversight role. Because the Laboratory may generate greater than 1,000 Kg (2,200 pounds) of hazardous waste in a month, it is considered a large quantity generator and has a RCRA permit to store hazardous wastes for up to one year before shipping the wastes off-site to licensed treatment and disposal facilities.

As noted in Chapter 2, BNL also has several satellite accumulation and 90-Day Hazardous Waste Accumulation Areas. Included with the hazardous wastes regulated under RCRA are mixed wastes which are generated in small quantities at BNL. Mixed wastes are materials that are both hazardous (under RCRA guidelines) and radioactive.

In July 2021, the NYSDEC visited BNL for two days to perform an inspection of RCRA hazardous waste activities. The inspection involved the review of shipping manifests, the Waste Management Facility's Part 373 RCRA Permit, inspection and training records, and a visit to the NYSDEC Permitted Treatment, Storage, and Disposal Facility (TSDF) and site 90-Day and Satellite Accumulation hazardous waste storage areas. A letter documenting the inspection was received from the NYSDEC in August 2021 which indicated that there were no violations of NYSDEC hazardous waste regulations observed.

### 3.10 POLYCHLORINATED BIPHENYLS

The storage, handling, and use of Polychlorinated Biphenyls (PCBs) are regulated under the Toxic Substance and Control Act. Capacitors manufactured before 1979 that are believed to be oil filled are handled as if they contain PCBs, even when that cannot be verified from the manufacturer's records. All equipment containing PCBs must be inventoried, except for capacitors containing less than three pounds of dielectric fluid and items with a concentration of PCB source material of less than 50 parts per million. Certain

**Table 3-8. Summary of Chemical and Oil Spill Reports.**

Spill No. and Date	Material/Quantity	ORPS Report	Source/Cause and Corrective Actions
21-04 07/8/21	Hydraulic Oil / 3 gallons	No	As HEMO Shop electricians were conducting a preventative maintenance inspection of the Bldg. 1005S elevator, they discovered that the five-gallon catch can used to capture hydraulic oil shaft weepage had overflowed causing oil to spill onto the pit floor. Oil from the catch can also spilled onto the elevator piston casing and dripped into the casing's interstitial space. Using a baler lowered in the annular space surrounding the casing, the electricians estimated that 2.5 inches of oil were floating atop groundwater in the casing. Thin diameter adsorbent booms were subsequently lowered into elevator casing to adsorb oil floating atop the groundwater. Adsorbent booms used to recover oil from the annular space surrounding the piston casing and adsorbent pads used to clean oil on the elevator pit floor were containerized and transferred to 90-day waste accumulation area in Bldg. 452 for consolidation with similar wastes for off-site disposal.
21-06 08/19/21	Hydraulic Fluid / 2 quarts	No	Contractor personnel involved with the HFBR stack demolition noticed oil leaking from a manlift they were using to observe stack related wastes being loaded onto rail cars by the Laboratory's rail spur. Contractor personnel recovered approximately 40 pounds of contaminated soil and gravel. Waste Management personnel transported the container with the oil-contaminated debris to the Bldg. 630 90-day hazardous waste accumulation area for eventual off-site disposal. Contractor personnel replaced a failed gasket on a hydraulic fitting that was the source of the manlift leak.
21-08 09/24/21	Hydraulic Fluid / 1 pint	No	Approximately one pint of hydraulic fluid leaked from the bucket hydraulic line fitting on a John Deere excavator that was being used during the demolition of Bldg. 421. Most of the oil leaked onto the excavator's boom and chassis, while a small amount dripped onto soil. A containment tray was placed beneath the excavator chassis to capture dripping fluid. Absorbent pads used to clean oil from the excavator boom and chassis along with oil contaminated soil was placed into a five-gallon pail that was transferred to the Bldg. 630 90-day waste accumulation area for off-site disposal. The spill was caused by a leaking piston seal that HEMO Shop personnel repaired.

PCB-containing articles or PCB containers must be labeled. The inventory is updated by July 1 of each year.

The Laboratory responds to any PCB spill in accordance with standard emergency response procedures. BNL was in compliance with all applicable PCB regulatory requirements during 2021 and disposed of 670 pounds of PCB-contaminated oil, debris, and other equipment comprised predominantly of lighting ballasts and small capacitors.

The Laboratory has aggressively approached reduction in its PCB inventory, reducing it by more than 99 percent since 1993. The only known regulated PCB-contaminated piece of electrical equipment remaining on site is a one-of-a-kind klystron located in BNL's Chemistry Department.

### 3.11 PESTICIDES

The storage and application of pesticides (e.g., insecticides, rodenticides, herbicides, and algicides) are regulated under the Federal Insecticide,

Fungicide, and Rodenticide Act and the NYSDEC Pesticide Regulations. BNL uses an Integrated Pest Management approach that was developed over a decade ago and was assessed in 2021 by a third-party (Cornell Cooperative). Pesticides are used at the Laboratory to control undesirable insects and mice and microbial growth in cooling towers and to maintain certain areas free of vegetation (e.g., around fire hydrants and inside secondary containment berms). Insecticides are also applied in research greenhouses on site and the Biology Field. Herbicide use is minimized wherever possible (e.g., through spot treatment of weeds). Pesticides are applied by BNL-employed, NYSDEC pesticide-certified applicators. On an infrequent basis and for special projects, an outside vendor who also possesses the required NYSDEC application licenses applies pesticides. Cooling towers are regularly treated by another vendor that has NYSDEC-licensed pesticide applicators using NYSDEC approved biocides, corrosion inhibitors, and disinfectants in order to prevent corrosion and to disinfect the

towers onsite.

By February 1 of every year, each BNL pesticide applicator submits application records to Environmental Protection staff that are reviewed, and an electronic annual report is created and submitted to the NYSDEC detailing insecticide, rodenticide, algacide, and herbicide use for the previous year. Contractors who apply pesticides and cooling tower biocides are responsible for filing their own reports.

### 3.12 WETLANDS AND RIVER PERMITS

As noted in Chapter 1, portions of the site are situated in the Peconic River floodplain. Portions of the Peconic River are listed by NYSDEC as “scenic” under the New York Wild, Scenic, and Recreational River Systems Act. The Laboratory also has six areas regulated as wetlands and several vernal (seasonal) pools. Construction or modification activities performed within these areas require permits from NYSDEC.

Activities that could require review under the BNL Natural and Cultural Resource Management Programs (BNL 2021 and BNL 2013a) are identified during the NEPA process (see Section 3.3). In the preliminary design stages of a construction project, design details required for the permit application process are specified. These design details ensure that the construction activity will not negatively affect the area, or if it does, that the area will be restored to its original condition. When design is near completion, permit applications are filed. During and after construction, the Laboratory must comply with the permit conditions. There were no open permits in 2021.

### 3.13 PROTECTION OF WILDLIFE

#### 3.13.1 Endangered Species Act

BNL updates its list of species that are endangered, threatened, and/or of special concern (see Table 6-1 in Chapter 6) as data from state and federal sources are provided. The northern long-eared bat (*Myotis septentrionalis*) is the first federally listed species known to be present at the Laboratory. This species is known to utilize the site at least during the summer months, and management options have been established for the protection of this species on site.

State-recognized endangered (E) or threatened

(T) species at BNL include: eastern tiger salamander (E), peregrine falcon (E), Persius dusky-wing (E), bracken fern (E), crested fringed orchid (E), Engelman spikerush (E), dwarf huckleberry (E), whorled loose-strife (E), prostrate knotweed (E), possum haw (E), ipecac spurge (E), swamp darter (T), banded sunfish (T), frosted elfin (T), little bluet (T), scarlet bluet (T), pine barrens bluet (T), northern harrier (T), stargrass (T), eastern showy aster (T), and stiff-leaved goldenrod (T).

Tiger salamanders are listed as endangered in New York State because populations have declined due to habitat loss through development, road mortality during breeding migration, introduction of predatory fish into breeding sites, historical collection for the bait and pet trade, water level fluctuations, pollution, and general disturbance of breeding sites. The BNL Natural Resource Management Plan (NRMP) (BNL 2021) formalizes the strategy and actions needed to protect 26 confirmed tiger salamander breeding locations on site. The strategy includes identifying and mapping habitats, monitoring breeding conditions, improving breeding sites, and controlling activities that could negatively affect breeding.

Peregrine falcons are listed as endangered in New York State due to historic declines associated with DDT. Falcons were confirmed nesting on the HFBR stack in 2019. Because the HFBR stack was scheduled for demolition in 2020, the nest was removed prior to the falcon’s return, allowing the project to move forward. The falcons continued to be seen on site, and in 2021, found an alternate nesting site, displacing ospreys that had been nesting on the Cell Tower behind Building 30 (Brookhaven Center).

Banded sunfish and swamp darter have historically been found in the Peconic River drainage areas on site. Both species are listed as threatened within New York State, with eastern Long Island having the only known remaining populations of these fish in New York. Measures taken, or being taken, by the Laboratory to protect the banded sunfish and swamp darter and their habitats include eliminating, reducing, or controlling pollutant discharges to the Peconic River; monitoring populations and water quality to ensure that habitat remains viable; and minimizing disturbances to the river and adjacent banks. Due to an extended



drought from 2015 through mid-2017, these two fish are not likely to be found on site. Should NYSDEC establish a recovery plan, fish may be restored to historic habitats in the future.

Three butterfly species that are endangered, threatened, or of special concern have been historically documented at the Laboratory. These include the frosted elfin, persius duskywing, and the mottled duskywing. None have been documented in recent surveys. Limited habitat for the frosted elfin and persius duskywing exists on Laboratory property and the mottled duskywing is likely to exist on site; therefore, the need to manage habitat and surveys for the three butterflies has been added to the NRMP.

Surveys for damselflies and dragonflies conducted periodically during the summer months confirmed the presence of one of the three threatened species of damselflies expected to be found on site. The pine-barrens bluet, a threatened species, has been documented at one of the many coastal plain ponds at BNL.

The Laboratory is also home to 14 species that are listed as species of special concern. Such species have no protection under the state endangered species laws but may be protected under other state and federal laws (e.g., Migratory Bird Treaty Act). New York State monitors species of special concern and manages their populations and habitats, where practical, to ensure that they do not become threatened or endangered. Species of special concern found at BNL include the mottled duskywing butterfly, marbled salamander, eastern spadefoot toad, spotted turtle, eastern box turtle, eastern hognose snake, worm snake, horned lark, whippoor-will, vesper sparrow, grasshopper sparrow, red-headed woodpecker, osprey, sharp-shinned hawk, and Cooper's hawk.

The management efforts for the tiger salamander also benefit the marbled salamander. At present, no protective measures are planned for the eastern box turtle or spotted turtle, as little activity occurs within their known habitat at the Laboratory. The Laboratory continues to evaluate bird populations as part of the management strategy outlined in the NRMP.

The Laboratory has 33 plant species that are protected under state law: eight are endangered;

three are threatened (as listed above); and four are rare plants: the small-flowered false fox-glove, narrow-leaved bush clover, wild lupine, and long-beaked bald-rush. The other 18 species are "exploitably vulnerable," meaning that they may become threatened or endangered if factors that result in population declines continue. These plants are currently sheltered due to the large areas of undeveloped pine barren habitat on site. Five species on the BNL list are likely present or possible due to presence of correct habitat. As outlined in the NRMP, locations of these rare plants must be determined, populations estimated, and management requirements established. See Chapter 6 for further details.

### 3.13.2 Migratory Bird Treaty Act

As mentioned in Chapter 1, the Laboratory has identified more than 185 species of migratory birds since 1948; of those, approximately 84 species nest on site. Under the Migratory Bird Treaty Act, migratory birds are protected from capture, harassment, and destruction or disturbance of nests without permits issued by the U.S. Fish and Wildlife Service. In the past, migratory birds have caused health and safety issues, especially through the deposition of fecal matter and the birds' assertive protection of nesting sites. When this occurs, proper procedures are followed to allow the birds to nest and preventive measures are taken to ensure that they do not cause problems in the future (e.g., access to nesting is closed or repaired, and/or deterrents to nesting are installed). Canada geese (*Branta canadensis*) are managed under an annual permit from the U.S. Fish and Wildlife Services goose nest management program. Occasionally, nesting migratory birds come in conflict with ongoing or planned construction activities. When this occurs, the USDA-APHIS-Wildlife Services Division is called for consultation and resolution, if possible. Each incident is handled on a case-by-case basis to ensure the protection of migratory birds, while maintaining fiscal responsibility. See Chapter 6 for more information on migratory birds.

### 3.13.3 Bald and Golden Eagle Protection Act

While BNL does not have bald or golden eagles nesting on site, these birds are occasionally

observed visiting the area during migration. At times, immature golden eagles have spent several weeks in the area. Bald eagles are known to spend long periods of time on the north and south shores of Long Island, and the first documentation of nesting on the island occurred in 2013.

Since that time, at least ten additional nesting pairs have been documented on Long Island. Bald eagles have been documented on the BNL site and are routinely seen in the vicinity of the STP, National Weather Service, and the Cell Tower near Building 30. Further information on bald eagles is presented in Chapter 6.

### 3.14 PUBLIC NOTIFICATION OF CLEARANCE OF PROPERTY

In accordance with DOE Order 458.1, authorized releases of property suspected of containing residual radioactive material must meet DOE and other federal, state, and local radiation protection policies and requirements. Released property must be appropriately surveyed, and the Laboratory must adequately demonstrate that authorized limits are met. In addition, documentation supporting the release of property should be publicly available. The release of property off the BNL site from radiological areas is controlled. No vehicles, equipment, structures, or other materials from these areas can be released from the Laboratory unless the amount of residual radioactivity on such items is less than the authorized limits. The default authorized limits are specified in the BNL Site Radiological Control Manual (BNL 2021 Rev. 11) and are consistent with the pre-approved authorized release limits set by DOE Order 458.1.

In 2021, excess materials not identified as radioactive, such as scrap metal and electronics equipment resulting from normal operations, were released to interested parties or to an off-site location. All materials were surveyed, as required, using appropriate calibrated instruments and released based on the DOE pre-approved authorized release limits. There were no releases of real property in 2021.

### 3.15 EXTERNAL AUDITS AND OVERSIGHT

#### 3.15.1 Regulatory Agency Oversight

A number of federal, state, and local agencies

oversee BNL activities. In addition to external audits and oversight, the Laboratory has a comprehensive self-assessment program, as described in Chapter 2. In 2021, due to the continued pandemic, BNL was only inspected by federal, state, or local regulators on nine occasions. These inspections included:

- *Air Compliance.* In September, a NYSDEC inspector performed a full compliance evaluation of regulated emission sources at BNL. There were no findings.
- *Potable Water.* In June and July, SCDHS collected samples and conducted its annual inspection of the BNL potable water system. There were no violations identified; corrective actions for any minor deficiencies were established and communicated with SCDHS and are being addressed by the Laboratory's Energy & Utilities Division.
- *Sewage Treatment Plant.* SCDHS conducts quarterly inspections of the Laboratory's STP to evaluate operations and sample the effluent for SPDES compliance. No performance or operational issues were identified. SCDHS also visited the site in September 2021 to collect samples and perform SPDES inspections of other permitted outfalls. No issues were identified.
- *RCRA.* In July, the NYSDEC visited BNL for two days to perform an inspection of RCRA hazardous waste activities. The inspection involved the review of shipping manifests, the Waste Management Facility's Part 373 RCRA Permit, inspection and training records, and a visit to the NYSDEC Permitted TSDF as well as site 90-Day and Satellite Accumulation hazardous waste storage areas. A letter documenting the inspection was received from the NYSDEC in August 2021 which indicated that there were no violations of NYSDEC hazardous waste regulations.
- *RCRA/UST/CAA.* In February, the EPA conducted a comprehensive Off-Site Compliance Monitoring Activity that covered RCRA, Underground Storage Tank (UST), and Clean Air Act (CAA) requirements. A letter received in March indicated that there were no concerns identified during the off-site compliance monitoring activity.

### 3.15.2 DOE Assessments/Inspections

The DOE Brookhaven Site Office (BHSO) performs routine inspections, assessments, and surveillances of BNL operations to ensure continual improvement and success in meeting the Laboratory's mission. In 2021, BHSO performed an assessment of BNL's Wildland Fire Management Program and a surveillance of a Waste Management procedure titled, WM-SOP-581, Rev. 1 High Dose MIRP Transfer.

BHSO found that BNL's Wildland Fire Management Program is well documented and Brookhaven Science Associates (BSA) staff are highly trained and qualified. It was observed that field conditions in undeveloped portions of BNL property present increased wildfire and/or safety risks due to excessive growth adjacent to PSEG LI transmission lines, standing deadwood, and presence of ladder fuels. There were four Level 3 Findings related to the conditions noted above. A Level 3 Finding is defined as a singular, isolated regulatory non-compliance where there is a process in place. The findings are being reviewed and analyzed by BSA and will be addressed, as appropriate, to prevent any future nonconformances.

The scope of the BHSO surveillance was to review the WM-SOP-581 procedure against the requirements of the Lab's Work Planning and Control Subject Area and the DOE approved Evaluation Report of the Facility Hazard Categorization of Building 865; no findings were identified.

BHSO also participated as an observer of the BSA Multi-Topic Assessment of BNL's environmental protection programs described below. BHSO participation comprised of observing BSA's scoping, assessment conduct, and reporting.

### 3.15.3 Environmental Multi-Topic Assessment

The BNL EPD conducts routine programmatic assessments. The determination of topics for these assessments is based upon past regulatory findings, results of environmental, safety, and health inspections and/or other routine self-assessments, and frequency of past assessments. In 2021, EPD planned for and executed a programmatic self-assessment in four areas: Sustainability, National Environmental Policy Act

(NEPA)/Cultural Resources, Endangered Species/Habitat, and Radioactive Waste Sampling programs. The primary objectives and results of these assessments are summarized below.

The Sustainability assessment included review of internal requirements against external and BSA contract requirements to ensure internal requirements conform, analyze and evaluate effectiveness of corrective and preventative actions from previous assessments/audits, evaluation of the Standards-Based Management System Pollution Prevention Subject Area for review cycles and proper maintenance, and assessment of sustainability program strengths and opportunities for improvement in the area of site development and new construction. This assessment resulted in one noteworthy practice, eight opportunities for improvement, and one observation. Based on assessor observations, the overall impression is that BNL is complying with contractual requirements despite budgetary constraints and is taking sustainable business considerations into account for site development. However, the assessment findings also concluded that sustainable design takes a lower priority as compared to safety issues and other important and immediate problems and priorities that take precedence. The identified observation and opportunities for improvement were shared with the assessed organizations, documented in the Laboratory's Integrated Operational Performance System (IOPS), and will be tracked to closure.

The NEPA/Cultural Resources assessment included the review of existing routine categorical exclusions (CXs) to determine if they are sufficient to cover work at BNL. Several organizations were also interviewed to ensure actions are in place to meet NEPA requirements; organizations responsible for facility maintenance (such as Facilities & Operations and Collider Accelerator) were also evaluated for their awareness of cultural resource requirements associated with buildings over 50 years old and/or eligible for listing on the National Register of Historic Places. The assessment resulted in two Noteworthy Practices for the Proposal Information Management System (PIMS) and Environment, Biology, Nuclear Science and Nonproliferation Directorate for established processes ensuring proper NEPA coverage; one

CHAPTER 3: COMPLIANCE STATUS

Non-conformance related to improper classification of projects as maintenance resulting in the need for re-evaluation; two Observations for failure to ensure NEPA evaluation prior to start of work; and five Opportunities for Improvement to ensure documents are updated on a routine basis (i.e., every five years), reminder system to submit annual memos covering programs, evaluating need to establish one or more additional generic CX document, and expanding the PIMS system to cover Joint Work Statements and Field Work Permits. Per the Laboratory’s Event/Issues Management Subject Area, a causal analysis was performed for the identified findings and corrective actions were developed and will be tracked to closure.

The Endangered Species/Habitat assessment included evaluation of management plans and any processes that are in place to ensure work

conducted at BNL is reviewed for impacts to threatened and endangered (T&E) species and their habitat and is compliant with Federal and State endangered species regulations. Based on assessor observations, the overall impression is that the Lab is fully complying with federal and state endangered species regulations. The assessment yielded no findings as there are multiple redundancies throughout the work planning process that prevent projects impacting special status species.

The assessment of Radioactive Waste Sampling Programs addressed portions of the Radioactive Waste Control Form (RWCF) review process affecting the identification and characterization of radioactive wastes containing “sampleable” materials. Through the review of randomly selected RWCF’s, the assessment reviewed the process of

**Table 3-9. Existing Agreements and Enforcement Actions Issued to BNL With Status.**

Number	Title	Parties	Effective Date	Status
<b>Agreements</b>				
No Number	Suffolk County Agreement	BNL, DOE, SCDHS	Originally signed on 09/23/87	This agreement was developed to ensure that the storage and handling of toxic and hazardous materials at BNL conform to the environmental and technical requirements of Suffolk County codes.
II-CERCLA-FFA-00201	Federal Facility Agreement under the CERCLA Section 120 (also known as the Interagency Agreement or “IAG” of the Environmental Restoration Program)	DOE, EPA, NYSDEC	02/28/92	This agreement provides the framework, including schedules, for assessing the extent of contamination and conducting cleanup at BNL. Work is performed either as an Operable Unit or a Removal Action. The IAG integrates the requirements of CERCLA, RCRA, and NEPA. Cleanup is currently in long-term surveillance and maintenance mode for the groundwater treatment systems, former soil/sediment cleanup areas, and the reactors; this includes monitoring of institutional controls. Demolition of the High Flux Beam Reactor (HFBR) stack was completed in 2021. The HFBR reactor vessel is scheduled for decontamination and decommissioning by 2072. All groundwater treatment systems operated as required in 2021. Management of the characterization and remediation of PFOS, PFOA and 1,4-dioxane was formally included under the BNL CERCLA program. Construction of two new treatment systems to address PFOS and PFOA in groundwater downgradient of two source areas was initiated in 2021.
<b>No Notices of Violation/Enforcement Actions for 2021.</b>				
No Number	Notice of Violation (NOV)	NYSDEC	08/17/21	On August 17, 2021, the Laboratory received an NOV for continuing violation of the permit limit for Tolytriazole (TTA). A formal noncompliance report which included a corrective action plan to address this issue was submitted to NYSDEC on September 16, 2021. Please see section 3.6.1 for more details.

Notes:  
 CERCLA = Comprehensive Environmental Response, Compensation and Liability Act  
 EPA = Environmental Protection Agency  
 NEPA = National Environmental Policy Act  
 NYSDEC = New York State Department of Environmental Conservation  
 RCRA = Resource Conservation and Recovery Act  
 SCDHS = Suffolk County Department of Health Services

identifying and documenting “sampleable” wastes as identified in and required by WM-SOP-510: Review and Certification of Radioactive and Accountable Nuclear Material Waste Control Forms. The assessment found that the overall process of identifying and documenting the “sampleable” portions of radioactive wastes is effectively performed and consistently and correctly captures potential problematic waste components which have resulted in past non-conformances with disposal facility waste acceptance criteria.

#### 3.15.4 Nevada National Security Site

The Laboratory continues to be a certified Nevada National Security Site (NNSS) waste generator. As part of the NNSS waste certification process, the NNSS Maintenance and Operations Contractor conducts annual assessments of generator Waste Certification Programs (WCP).

BNL was not included on the NNSS 2021 assessment schedule; however, as required by the NNSS Waste Acceptance Criteria, an independent assessment of the WCP was scheduled and performed by an outside contractor. The assessment resulted in no findings against BNL’s WCP, enabling BNL continued access to the NNSS for radioactive waste disposal.

#### 3.16 AGREEMENTS, ENFORCEMENT ACTIONS, AND OTHER ENVIRONMENTAL OCCURRENCE REPORTS

In addition to the rules and regulations discussed throughout this chapter, there were two existing agreements between BNL, DOE, and regulatory agencies that remained in effect and one Notice of Violation (NOV) accessed in 2021. Existing agreements and details on the findings and corrective actions taken for the NOV are summarized in Table 3-9.

#### REFERENCES AND BIBLIOGRAPHY

- BNL 2013a. Cultural Resource Management Plan for Brookhaven National Laboratory. Brookhaven National Laboratory, Upton, NY. May 2013.
- BNL 2021. Natural Resource Management Plan for Brookhaven National Laboratory. BNL-112669-2021. Brookhaven National Laboratory, Upton, NY.
- BNL 2019. Brookhaven National Laboratory Site Radiological Control Manual, Rev. 9. Brookhaven National Laboratory, Upton, NY.
- Bruno, C. 2021. Brookhaven National Laboratory Spill Prevention Control and Countermeasure Plan. Brookhaven National Laboratory, Upton, NY.
- Bruno, C. 2021. Brookhaven National Laboratory 2020 Annual Potable Water Sampling Plan. Brookhaven National Laboratory, Upton, NY.
- DOE Order 458.1 2011. Radiation Protection of the Public and the Environment. U.S. Department of Energy, Washington, DC. February 11, 2011.
- EPA. 2000. Federal Facilities Agreement under CERCLA120. Administrative Docket Number II-CERCLA-FFA-00201.
- SCDHS. 1993. Suffolk County Sanitary Code Article 12: Toxic and Hazardous Material Storage and Handling Controls. Suffolk County Department of Health Services, NY.



Brookhaven National Laboratory (BNL) monitors both radioactive and nonradioactive emissions at several facilities on site to ensure compliance with the requirements of the Clean Air Act (CAA). In addition, BNL conducts ambient air monitoring to verify local air quality and detect possible environmental impacts from Laboratory operations.

During 2021, BNL facilities released a total of 11,054 curies of short-lived radioactive gases. Oxygen-15 and Carbon-11 emitted from the Brookhaven Linac Isotope Producer constituted more than 99.9 percent of the site's radiological air emission.

Because natural gas prices were comparatively lower than residual fuel oil prices throughout the year, BNL's Central Steam Facility used natural gas to meet 98.9 percent of the heating and cooling needs of the Laboratory's major facilities in 2021. As a result, emissions of particulates, oxides of nitrogen, sulfur dioxide, and volatile organic compounds were well below the respective regulatory permit criteria pollutant limits.

The COVID-19 pandemic had significant impacts on air travel and commuting greenhouse gas (GHG) emissions. Since the Laboratory followed its Phase 2 limited operations plan consistent with New York State and Department of Energy guidelines, air travel was limited to mission-critical trips, resulting in a 94 percent drop in air travel GHG emissions from the 2020 fiscal year total. Since 65 to 70 percent of staff telecommuted during 2021, commuting GHG emissions were 27 percent lower than in fiscal year 2020.

---

#### 4.1 RADIOLOGICAL EMISSIONS

Federal air quality laws and U.S. Department of Energy (DOE) regulations that govern the release of airborne radioactive material include 40 CFR 61: Subpart H, National Emission Standards for Hazardous Air Pollutants (NESHAPs) part of the CAA, and DOE Order 458.1, Chg. 4, Radiation Protection of the Public and the Environment. Under NESHAPs Subpart H, facilities that have the potential to cause an annual radiation dose greater than 0.1 mrem (1  $\mu$ Sv) to a member of the public must continuously monitor emissions. Facilities capable of delivering radiation doses below that limit require periodic, confirmatory sampling.

BNL has two active facilities: the Brookhaven Linac Isotope Producer (BLIP), whose emissions are continuously monitored with an inline detection system, and the Target Processing Laboratory (TPL), which has a particulate filter sampling system to continuously collect samples for gross alpha and gross beta activity, and one inactive facility, the High

Flux Beam Reactor (HFBR), where periodic emissions monitoring is conducted. Figure 4-1 provides the locations of these monitored facilities and Table 4-1 presents airborne release data from these facilities. Annual emissions from monitored facilities are discussed in the following sections of this chapter. The associated radiation dose estimates are presented in Table 8-5 in Chapter 8.

#### 4.2 FACILITY MONITORING

Radioactive emissions are monitored at the HFBR, BLIP, and TPL. The sampling points in the exhaust stack for BLIP and the TPL exhaust duct are equipped with glass-fiber filters that capture samples of airborne particulate matter released from these facilities. The filters are collected and analyzed weekly for gross alpha and beta activity. Particulate filter analytical results for gross alpha and beta activity in 2021 are reported in Table 4-2. The average gross alpha and beta airborne activity concentration levels for samples collected from



**Figure 4-1. Air Emission Release Points Subject to Monitoring.**

the BLIP exhaust stack were 0.0004 and 0.0067 pCi/m<sup>3</sup>, respectively. Annual average gross alpha and beta airborne activity concentration levels for samples collected from the TPL were 0.0009 and 0.0096 pCi/m<sup>3</sup>, respectively.

#### 4.2.1 High Flux Beam Reactor

In 1997, a groundwater plume was traced back to a leak in the HFBR spent fuel storage pool. Consequently, the HFBR was put in standby mode until November 1999, when the DOE declared that it was to be permanently shut down. Residual tritium in water in the reactor vessel and piping systems continued to diffuse into the building's air through valve seals and other system penetrations, though

emission rates were much lower than during the years of operation. In 2010, the HFBR was disconnected from the 100-meter stack, and a new HFBR exhaust system was installed in 2011. As part of the HFBR Long-Term Surveillance Program (BNL 2018), air samples are collected from outside the HFBR confinement structure using a permanently installed sample port. Samples are analyzed for tritium to evaluate facility emissions and to ensure that air quality within the building is acceptable to permit staff entry for inspections and routine maintenance. Samples are collected for three or four weeks per month using a standard desiccant sampling system for tritium analysis. Desiccant samples are analyzed by an off-site contract laboratory.

#### 4.2.2 Brookhaven Linac Isotope Producer

Protons from the Linear Accelerator (LINAC) are sent via an underground beam tunnel to the BLIP, where they strike various metal targets to produce new radionuclides for medical diagnostics. The activated metal targets are transferred to the TPL in Building 801 for separation and shipment to various radiopharmaceutical research laboratories. During irradiation, the targets become hot and are cooled by a continuously recirculating water system. The cooling water also becomes activated during the process, producing secondary radionuclides. The most significant of these radionuclides are oxygen-15 (O-15, half-life: 122 seconds) and carbon-11 (C-11, half-life: 20.4 minutes). During target irradiations, both isotopes are released as gaseous, airborne emissions through the facility's 33-foot stack. Emission levels of these radionuclides are dependent on the current and energy of the proton beam used to produce the radioisotopes.

In 2021, BLIP operated over a period of 36.4 weeks, during which 3,685 Ci of C-11 and 7,369 Ci of O-15 were released, totaling 11,054 Ci (see Table 4-1). Since BLIP did not conduct operations in 2020, comparison is made to 2019 BLIP operations. In 2019, BLIP combined emissions of C-11 and O-15 were higher than 2021 levels at 19,022 Ci. The 2021 release of tritium produced from activation of target cooling water was 0.026 Ci compared to 0.038 Ci of tritium released in 2019.

#### 4.2.3 Target Processing Laboratory

As mentioned in Section 4.2.1, metal targets irradiated at the BLIP are transported to the TPL in Building 801, where isotopes are chemically extracted for radiopharmaceutical production. Airborne radionuclides released during the extraction process are drawn through multi-stage HEPA and charcoal filters and the filtered air is then vented to the atmosphere. The types of radionuclides that are produced depend on the isotopes chemically extracted from the irradiated metal targets, which may change from year to year. Annual radionuclide quantities released from this facility are very small, typically in the  $\mu\text{Ci}$  to  $\text{mCi}$  range. Historical analytical results of TPL particulate filters show gross alpha/beta levels to be minimal. As a result, there are no reported

**Table 4-1. Airborne Radionuclide Releases from Monitored Facilities.**

Facility	Nuclide	Half-Life	Ci Released
HFBR	Tritium	12.3 years	2.59E-01
BLIP	C-11	20.38 minutes	3.68E+03
	O-15	122 seconds	7.37E+03
	Tritium	12.3 years	2.59E-02
<b>Total</b>			<b>1.11E+04</b>

**Notes:**

1 Ci =  $3.7\text{E}+10$  Bq

BLIP = Brookhaven Linac Isotope Producer

HFBR = High Flux Beam Reactor (operations were terminated in November 1999)

radionuclide emissions from the TPL in Table 4-1. Should future gross beta analyses of TPL emissions show the potential for other radionuclide emissions, gamma analysis may be used to identify potentially emitted nuclides.

#### 4.2.4 Additional Minor Sources

Several research departments at BNL use designated fume hoods for work that involves small quantities of radioactive materials in the  $\mu\text{Ci}$  to  $\text{mCi}$  range. The work typically involves labeling chemical compounds and transferring material between containers. Due to the use of HEPA filters and activated charcoal filters, the nature of the work conducted, and the small quantities involved, these operations have a very low potential for atmospheric releases of significant quantities of radioactive materials. Compliance with NESHAPs Subpart H is demonstrated using an inventory system that allows an upper estimate of potential releases to be calculated.

Facilities that demonstrate compliance in this way include Buildings 463, 490, 510, 555, 734, 745, 815, and 817, where research is conducted in the fields of nuclear safety, nuclear science, biology, chemistry, high energy physics, photon science, advanced technology, environmental chemistry, and synthetic biology. See Table 8-5 in Chapter 8 for the calculated dose from these facility emissions.

#### 4.2.5 Nonpoint Radiological Emission Sources

Nonpoint radiological emissions from a variety of diffuse sources may be evaluated for compliance with NESHAPs Subpart H. Diffuse sources evaluated often include planned

research, planned waste management activities, and planned decontamination and decommissioning activities. Evaluations determine whether NESHAPs permitting and continuous monitoring requirements are applicable or periodic confirmatory sampling is needed to ensure compliance with Subpart H standards for radionuclide emissions. Chapter 8 discusses the NESHAPs evaluations of diffuse sources in 2021.

**4.3 AMBIENT AIR MONITORING**

As part of the Environmental Monitoring Program, air monitoring stations are in place around the perimeter of the BNL site (see Figure 4-2). There are four blockhouse stations equipped for collecting samples. At each blockhouse, vacuum pumps draw air through columns where particulate matter is captured on a glass-fiber filter. Particulate filters are collected weekly and analyzed for gross alpha and beta activity using a gas-flow proportional counter. Also, water vapor for tritium analysis is collected on silica-gel adsorbent material for processing by liquid scintillation analysis. In 2021, silica-gel samples were collected every two weeks.

**4.3.1 Gross Alpha and Beta Airborne Activity**

Particulate filter analytical results for gross alpha and beta airborne activity are reported in Table 4-3. Ambient air samples are collected weekly from site perimeter monitoring stations P2, P4, P7, and P9. Validated samples are those not rejected due to equipment malfunction or other factors (e.g., sample air volumes were not acceptable).

The annual average gross alpha and beta airborne activity levels for the four monitoring stations were 0.0012 and 0.0126 pCi/m<sup>3</sup>, respectively. Annual gross beta activity trends recorded at Station P7 are plotted in Figure 4-3. The results for this location are typical for the site and show seasonal variation in activity within a range that is representative of natural background levels. The New York State Department of Health (NYSDOH) received duplicate filter samples that were collected at Station P7, using a sampler provided by NYSDOH. These samples were collected weekly and analyzed by the NYSDOH laboratory for gross beta activity. The analytical results were comparable to the Station P7 samples analyzed by General Engineering Lab; an analytical laboratory contracted

**Table 4-2. Gross Activity in Facility Air Particulate Filters.**


Monitored Facility		Gross Alpha		Gross Beta	
		(pCi/m <sup>3</sup> )			
BLIP	N	52		52	
	Max.	0.0012 ± 0.0008		0.0358 ± 0.0028	
	Avg.	0.0004 ± 0.0005		0.0067 ± 0.0011	
	MDL	0.0007*		0.0010*	
TPL - Bldg. 801	N	52		52	
	Max.	0.0045 ± 0.0009		0.0449 ± 0.0022	
	Avg.	0.0009 ± 0.0005		0.0096 ± 0.0011	
	MDL	0.0006*		0.0008*	

Notes:  
 See Figure 4-1 for monitored facility locations.  
 All values shown with a 95% confidence interval.  
 BLIP = Brookhaven Linac Isotope Producer  
 MDL = Minimum Detection Limit  
 N = Number of validated samples collected  
 TPL = Target Processing Laboratory  
 \*Average MDL for all validated samples taken at this location

**Table 4-3. Gross Activity Detected in Ambient Air Monitoring Particulate Filters.**

Sample Station		Gross Alpha		Gross Beta	
		(pCi/m <sup>3</sup> )			
P2	N	49		49	
	Max.	0.0032 ± 0.0011		0.0331 ± 0.0024	
	Avg.	0.0013 ± 0.0005		0.0132 ± 0.0012	
	MDL	0.0005*		0.0007*	
P4	N	45		45	
	Max.	0.0041 ± 0.0011		0.0228 ± 0.0014	
	Avg.	0.0013 ± 0.0005		0.0131 ± 0.0011	
	MDL	0.0004*		0.0006*	
P7	N	50		50	
	Max.	0.0036 ± 0.0008		0.0200 ± 0.0013	
	Avg.	0.0013 ± 0.0005		0.0122 ± 0.0010	
	MDL	0.0004*		0.0006	
P9	N	48		48	
	Max.	0.0026 ± 0.0007		0.0221 ± 0.0016	
	Avg.	0.0011 ± 0.0005		0.0119 ± 0.0012	
	MDL	0.0004*		0.0006*	
<b>Grand Average</b>		<b>0.0012 ± 0.0005</b>		<b>0.0126 ± 0.0011</b>	

Notes:  
 See Figure 4-2 for sample station locations.  
 All values shown with a 95% confidence interval.  
 MDL = minimum detection limit  
 N = Number of validated samples collected  
 \*Average MDL for all validated samples taken at this location

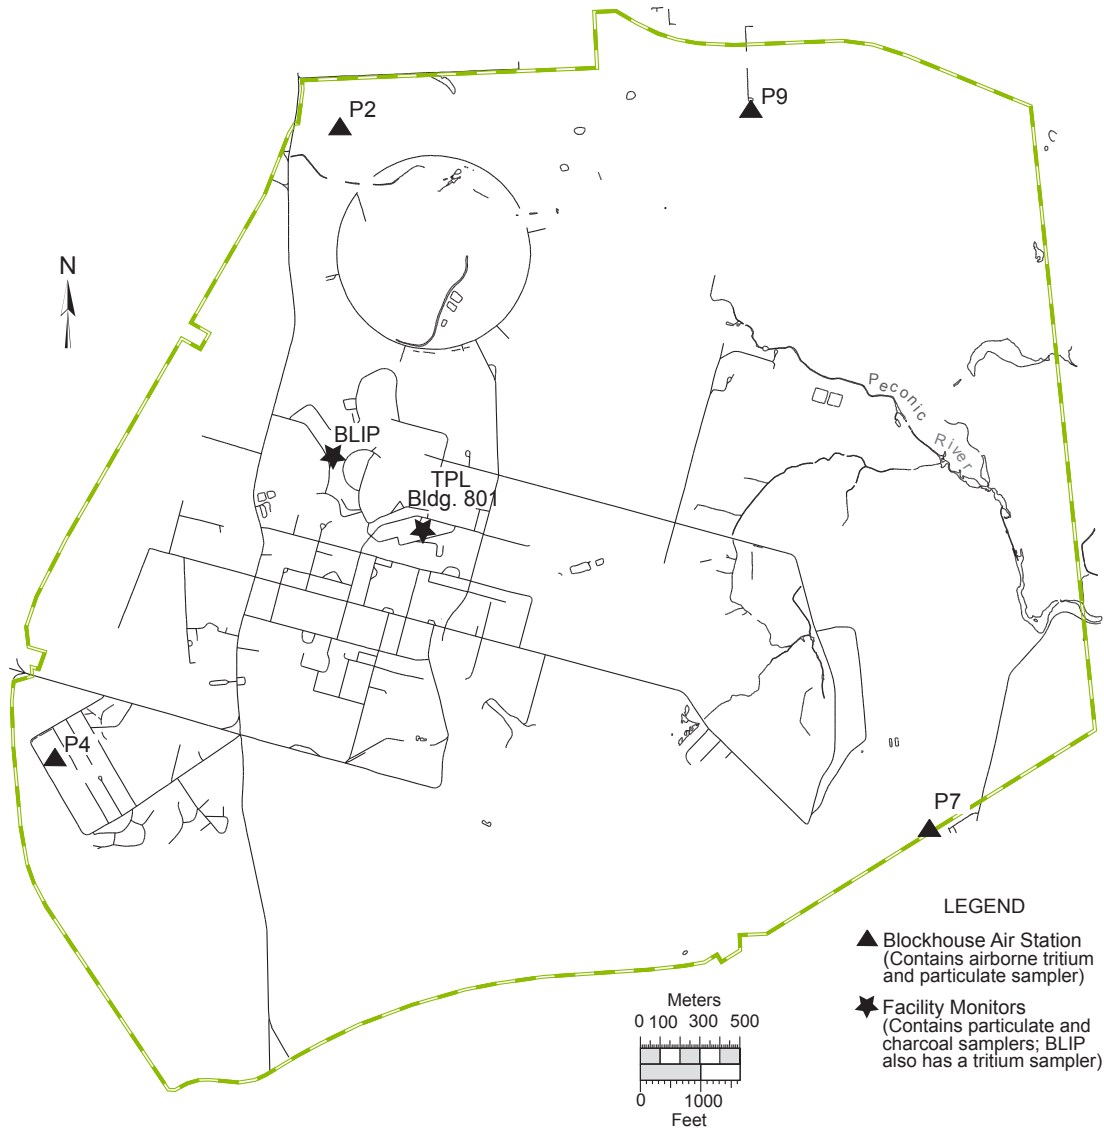

**Figure 4-2. BNL On-Site Ambient Air Monitoring Stations.**

by BNL. New York State's analytical results for gross beta activity at the Laboratory were between 0.0034 and 0.0148 pCi/m<sup>3</sup>, with an average concentration of 0.0088 pCi/m<sup>3</sup>. BNL results ranged from 0.0059 to 0.0200 pCi/m<sup>3</sup>, with an average concentration of 0.0122 pCi/m<sup>3</sup>.

As part of a statewide monitoring program, NYSDOH also collects air samples in Albany, New York, a control location with no potential to be influenced by radiological facility emissions. In 2021, NYSDOH reported that airborne gross beta activity at that location varied between 0.0019

and 0.0239 pCi/m<sup>3</sup> and had an average concentration of 0.0110 pCi/m<sup>3</sup>. All the BNL samples were less than the maximum concentration collected at the NYSDOH control location, demonstrating that on-site radiological air quality was consistent with that observed at locations in New York State not located near radiological facilities.

#### 4.3.2 Airborne Tritium

Airborne tritium in the form of tritiated water (HTO) is monitored throughout the BNL site. In 2021, samples were collected from Stations P2,



P4, P7, and P9 to assess the potential impacts from the Laboratory's two tritium sources. Table 4-4 lists the number of validated samples collected at each location, the maximum value observed, and the annual average concentration. Validated samples are those not rejected due to equipment malfunction or other factors (e.g., a battery failure in the sampler, frozen or supersaturated silica gel, insufficient sample volumes, or the loss of sample during preparation at the contract analytical laboratory). Samples for airborne tritium were collected every two weeks from each sampling station during 2021. The average tritium concentrations at all the sampling locations were less than the typical minimum detection limits, ranging from 4.4 to 14.5 pCi/m<sup>3</sup>.

#### 4.4 NONRADIOLOGICAL AIRBORNE EMISSIONS

Various state and federal regulations governing non-radiological releases require facilities to conduct periodic or continuous emission monitoring to demonstrate compliance with emission limits. The Central Steam Facility (CSF) is the only BNL facility that requires monitoring for non-radiological emissions. The Laboratory has several other emission sources subject to state and federal regulatory requirements that do not require emission monitoring (see Chapter 3 for details).


The CSF supplies steam for heating and cooling to major BNL facilities through an underground steam distribution and condensate grid. The location of the CSF is shown in Figure 4-1. The combustion units at the CSF are designated as Boilers 1A, 5, 6, and 7. Boiler 1A, which was installed in 1962, has a heat input of 16.4 MW (56.7 million British thermal units [MMBtu]/per hour). Boiler 5, installed in 1965, has a heat input of 65.3 MW (225 MMBtu/hr). The newest units, Boilers 6 and 7, were installed in 1984 and 1996, and each has a heat input of 42.6 MW (147 MMBtu/hr). For perspective, National Grid's Northport, New York, power station has four utility-sized turbine/generator boilers, each with a maximum-rated heat input of 385 MW (1,315 MMBtu/hr).

Because the CSF boilers have the potential to emit more than 100 tons per year of oxides of nitrogen (NO<sub>x</sub>), the CSF is considered a major facility, and all four of its boilers are subject to the

Reasonably Available Control Technology (RACT) requirements of Title 6 of the New York Code, Rules, and Regulations (NYCRR) Subpart 227-2. Because of their design, heat inputs, and dates of installation, Boilers 6 and 7 are also subject to the Federal New Source Performance Standard (40 CFR 60, Subpart Db: Standards of Performance for Industrial-Commercial-Institutional Steam Boilers). Both boilers are equipped with continuous emission monitoring systems (CEMS) to show compliance with NO<sub>x</sub> standards of Subpart 227-2 and Subpart Db, and with continuous opacity monitors to demonstrate compliance with Subpart Db opacity monitoring requirements. To measure combustion efficiency, the boilers are also monitored for carbon monoxide (CO). Continuous emission monitoring results from the two boilers are reported quarterly to EPA and the New York State Department of Environmental Conservation (NYSDEC).

The Subpart 227-2 NO<sub>x</sub> RACT emission limit for the combustion of natural gas and the combustion of No. 6 oil burned in the CSF three large boilers is 0.15 lbs/MMBtu. The NO<sub>x</sub> RACT emission limit for the CSF's one mid-size boiler (Boiler 1A) is 0.20 lbs/MMBtu. From May 1 to September 15 of each year, the peak ozone period, owners and operators of boilers equipped with CEMS must demonstrate compliance with Subpart 227-2 NO<sub>x</sub> RACT limits by calculating the 24-hour average emission rate from CEMS readings and comparing the value to the emission limit. During the remainder of the year, the calculated 30-day rolling average emission rate is used to establish compliance. Owners and operators of boilers not equipped with CEMS must demonstrate compliance with NO<sub>x</sub> RACT limits via periodic emissions testing. Following the end of each calendar quarter, facilities with boilers equipped with CEMS must tabulate and summarize emissions, monitoring, and operating parameter measurements recorded during the preceding three months. Measured opacity levels cannot exceed 20 percent opacity, except for one six-minute period per hour of not more than 27 percent opacity.

When No. 6 oil was burned, past emissions testing and CEMS results have shown that CSF boilers 5, 6, and 7 cannot meet the new lower NO<sub>x</sub> RACT standards; therefore, BNL uses an

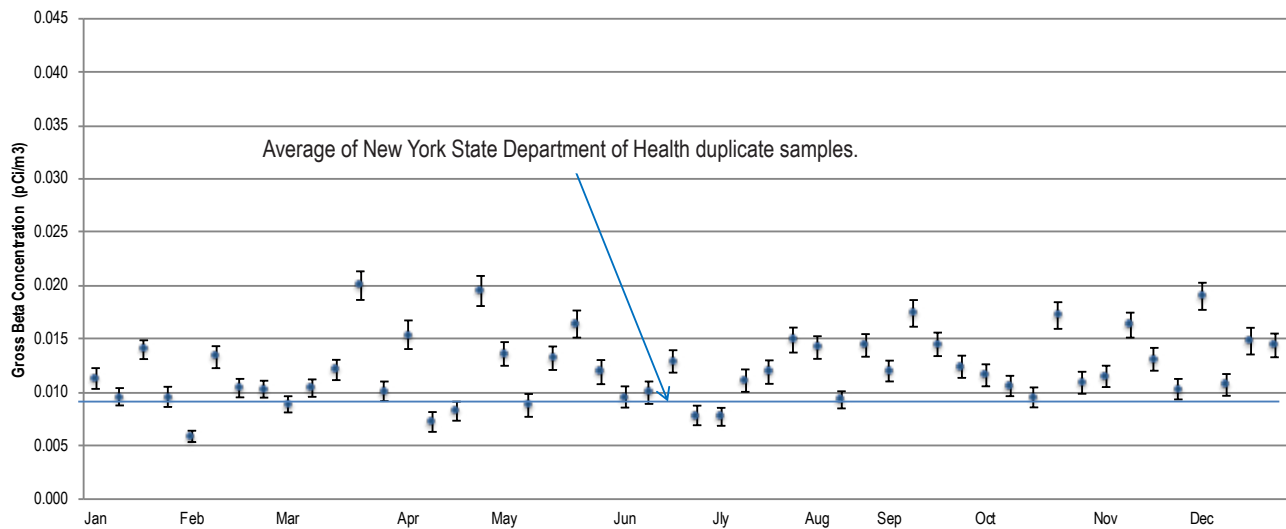

Note: All values are presented with a 95 percent confidence interval.

**Figure 4-3. Airborne Gross Beta Concentration Trend Recorded at Station P7.**

approved system averaging plan to demonstrate compliance in quarterly reports submitted to NYSDEC. This plan utilizes a NO<sub>x</sub> ledger, where NO<sub>x</sub> rate credits accumulated during quarterly periods when natural gas is burned at levels below the NO<sub>x</sub> RACT limits offset ledger debits that occur when Boilers 5, 6, and 7 burn oil. The ledger must show that the actual NO<sub>x</sub> weighted average emission rate of operating boilers is less than the Subpart 227-2 permissible NO<sub>x</sub> weighted average rate for the quarter.

The actual weighted average emission rates for operating boilers in the first, second, third, and fourth quarters, respectively, were 0.090, 0.109, 0.093, and 0.112 lbs/MMBtu, while the corresponding permissible weighted average emissions rate was 0.151 lbs/MMBtu for the first and third quarters and 0.150 lbs/MMBtu for the second and fourth quarters.

In 2021, there were seven recorded excess opacity measurements. Two recorded readings for Boiler 6 on February 17 were due to a load shift and a single Boiler 6 excess opacity reading on March 28 was due to unusually heavy rainfall that obstructed the transmission of light in the Boiler 6 continuous opacity monitor. Two Boiler 7 excess opacity readings on March 15 were due to contractor maintenance of the opacity monitor, while two Boiler 7 excess opacity readings

on June 22 occurred during start-up/shutdown of the boiler while firing #6 oil in preparation for National Grid utility maintenance of the natural gas supply system. While there are no regulatory requirements to continuously monitor opacity for Boilers 1A and 5, surveillance monitoring of visible stack emissions is a condition of BNL's Title V operating permit. Daily observations of stack gases recorded by CSF personnel throughout the year showed no visible emissions on days when the boilers were operated.

To satisfy quality assurance requirements for the continuous emissions monitoring system of the Laboratory's Title V operating permit, a relative accuracy test audit (RATA) of the Boilers 6 and 7 continuous emissions monitoring systems for NO<sub>x</sub> and CO<sub>2</sub> was conducted in December 2021. The results of the RATA demonstrated that the Boiler 6 and 7 NO<sub>x</sub> and CO<sub>2</sub> continuous emissions monitoring systems met RATA acceptance criteria, which are defined in 40 CFR 60, Appendix B, Specifications 2 and 3.

In 2021, residual fuel prices exceeded those of natural gas for most of the year. As a result, natural gas was used to supply 98.9 percent of the heating and cooling needs of BNL's major facilities. By comparison, in 2016, residual fuel satisfied 21 percent of the major facility heating and cooling needs. Consequently, 2021 emissions of

**Table 4-4. Ambient Airborne Tritium Measurements in 2021.**

Sample Station	Wind Sector	Validated Samples	Maximum	Average
			(pCi/m <sup>3</sup> )	
P2	NNW	25	14.3 ± 9.2	1.3 ± 4.3
P4	WSW	22	15.0 ± 7.9	2.4 ± 4.5
P7	ESE	25	6.7 ± 6.8	1.3 ± 5.0
P9	NE	25	13.6 ± 6.1	1.7 ± 7.5
<b>Grand Average</b>				<b>1.7 ± 5.4</b>

Notes:  
 See Figure 4-2 for station locations.  
 Wind sector is the downwind direction of the sample station from the High Flux Beam Reactor (HFBR) stack.  
 All values reported with a 95% confidence interval.  
 Typical minimum detection limit for tritium is between 4.4 and 14.5 pCi/m<sup>3</sup>.

particulates, NO<sub>x</sub>, and sulfur dioxide (SO<sub>2</sub>) were 1.8, 14.1, and 17.8 tons less than the respective totals for 2016, when No. 6 oil was used to supply a much higher percent of site heating and cooling needs. Table 4-5 shows fuel use and emissions since 2012.

**4.5 GREENHOUSE GAS EMISSIONS**

Since the implementation guidance for Executive Order (EO) 13834, Efficient Federal Operations, that was released in April 2019 did not require agencies to amend greenhouse gas

(GHG) reduction targets, the Laboratory has continued to strive to achieve the numerical targets set forth in EO 13693.

One of the overarching goals of EO 13693 was for federal agencies to establish agency-wide GHG reduction targets for their combined Scope 1 and 2 GHG emissions and for their Scope 3 GHG emissions (see Appendix A for definitions). DOE set the following GHG emission reduction goals for fiscal year (FY) 2025: reduce Scope 1 and 2 GHG emissions by 50 percent relative to its FY 2008 baseline and reduce Scope 3 GHG emissions by 25 percent relative to its FY 2008 baseline. BNL includes these same goals in its annual Site Sustainability Plan (SSP), which it submits to DOE in December of each year (BNL 2022). BNL’s SSP identifies several actions that have or will be taken to help the Laboratory progress towards meeting the Scope 1 and 2 GHG emissions reduction goal.

In November 2011, the Long Island Solar Farm (LISF), a large array of more than 164,000 solar photovoltaic panels constructed on the BNL site, began producing solar power. The LISF was estimated to deliver an annual average of 44 million kilowatt-hours (kWh) per year of solar energy into the local utility grid over a 20-year period. To date,

**Table 4-5. Central Steam Facility Fuel Use and Emissions (2012–2021).**

Annual Fuel Use and Fuel Heating Values							Emissions			
Year	No. 6 Oil (10 <sup>3</sup> gals)	Heating Value (MMBtu)	No. 2 Oil (10 <sup>3</sup> gals)	Heating Value (MMBtu)	Natural Gas (10 <sup>6</sup> ft <sup>3</sup> )	Heating Value (MMBtu)	TSP (tons)	NO <sub>x</sub> (tons)	SO <sub>2</sub> (tons)	VOCs (tons)
2012	43.44	6,519	0.00	0	613.44	630,616	2.5	29.1	1.2	1.7
2013	117.21	17,590	0.00	0	631.95	649,645	2.9	30.7	2.9	1.8
2014	34.03	5,107	0.00	0	673.80	690,584	2.6	30.9	1.0	1.9
2015	9.66	1,449	0.00	0	619.98	638,209	2.4	30.3	0.4	1.7
2016	804.38	120,712	0.00	0	441.98	453,348	3.7	33.6	19.0	1.7
2017	65.07	9,765	0.00	0	564.96	579,559	2.3	28.2	1.7	1.6
2018	36.04	5,409	0.04	6	642.33	662,242	2.5	31.5	1.0	1.8
2019	15.56	2,335	0.13	17.94	588.49	649,343	2.3	28.5	0.5	1.6
2020	44.20	6,455	0	0	553.70	610,905	2.2	28.9	1.2	1.5
2021	46.24	6,713	0	0	583.99	603,261	1.9	19.5	1.2	1.3
<b>Permit Limit (in tons)</b>							<b>113.3</b>	<b>159.0</b>	<b>445.0</b>	<b>39.7</b>

Notes:  
 NO<sub>x</sub> = Oxides of Nitrogen  
 SO<sub>2</sub> = Sulfur Dioxide  
 TSP = Total Suspended Particulates  
 VOCs = Volatile Organic Compounds

it has exceeded the estimate every year; in 2021, the LISF provided 48.9 million kilowatt-hours of solar energy to Long Island. This equates to 27,055 metric tons CO<sub>2</sub> equivalents (MT CO<sub>2</sub>e) GHG offset or reduction.

Even though the power from the LISF is purchased by the local utility, the Laboratory receives GHG reduction credits by purchasing an equivalent amount of Renewable Energy Credits (RECs) each year. In March 2011, BNL began receiving 15 megawatts per hour of hydropower from the New York Power Authority. In 2021, BNL consumed 120,593 megawatts of hydropower, providing a net combined GHG reduction of 93,728 MT CO<sub>2</sub>e from the LISF and hydropower. Furthermore, in 2016 BNL completed an expansion of the Northeast Solar Energy Research Center (NSERC). The NSERC is a solar photovoltaic facility that now has a total peak capacity of 907 kW. In 2021, it provided 659,336 kWh and offset 365 MT CO<sub>2</sub>e.

DOE awarded BNL's first Utility Energy Service Contract (UESC) in October 2013. This project provided for the implementation of energy savings measures to reduce Scope 1 and 2 GHG levels by approximately 7,000 MT CO<sub>2</sub>e. The UESC project implementation was completed in May 2015 and included the following energy conservation measures:

- Installation of a 1,250-ton high-efficiency chiller to increase the efficiency of supplied chilled water;
- Upgraded lighting systems in 18 buildings; and
- Enhanced building control upgrades and additions to provide for heating, ventilation, and air conditioning temperature setbacks in nine buildings.

The UESC project has been a success, with annual energy savings within three percent of the original estimates for each of the seven years since completion. In FY 2018, an investment grade audit (IGA) was initiated for a potential Phase II


UESC project. In 2019, the IGA was completed and the process to issue a contract was begun. Planned energy savings projects under consideration include additional lighting and building control upgrades, free cooling, and some HVAC improvements for the Chemistry Building. Due to some concerns by Brookhaven Science Associates and DOE, the UESC II effort was temporarily paused. However, it is expected to resume soon. BNL continues to periodically evaluate the potential to install a combined heat and power plant, as well as renewable energy projects, and will recommend going forward if a business case is developed to make installation a viable alternative.

To meet the 2025 Scope 3 GHG emissions reduction goal, Scope 3 emissions must be lowered by 5,034 MT CO<sub>2</sub>e from the FY 2008 baseline of 20,136 MT CO<sub>2</sub>e. Overall, Scope 3 GHG emissions decreased by 3,617 MT CO<sub>2</sub>e, down 26.1 percent from FY 2020, and 49 percent less than the FY 2008 baseline value of 20,136 MT CO<sub>2</sub>e. The decrease from FY 2020 is mostly due to a 2,302 MT CO<sub>2</sub>e drop in GHG emissions from business air travel, and a 993 MT CO<sub>2</sub>e decrease in commuting GHG emissions.


**Figure 4-4. BNL Scope 3 Greenhouse Gases: Impacts of Covid-19**

**BNL Greenhouse Gases**

Brookhaven National Lab saw significant reductions in greenhouse gas emissions

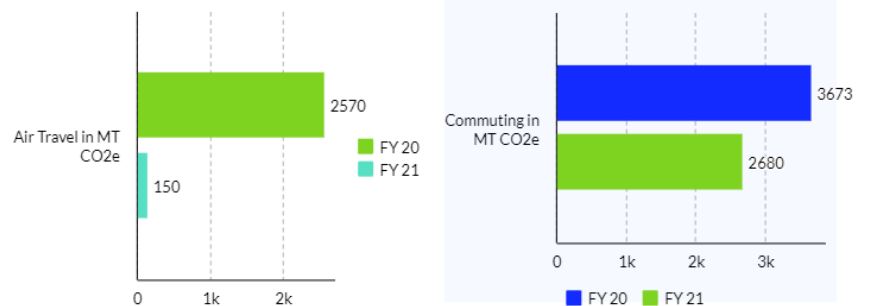

**2020-2021 BNL impacts**

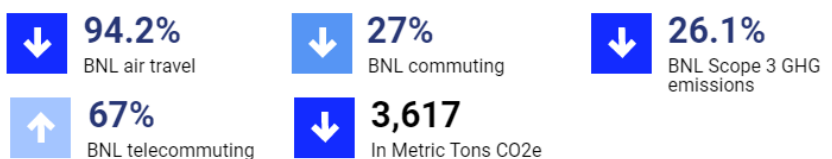

The COVID-19 pandemic had significant impacts on Laboratory air travel and commuting GHG emissions, as noted in Figure 4-4. Since the Laboratory followed its limited operations plan consistent with New York State and DOE guidelines throughout the year, air travel trips were restricted to those that were mission critical and 67 percent of employees telecommuted.

#### 4.5.1 Hydrofluorocarbons

To prepare for anticipated decreases in the availability of certain hydrofluorocarbons (HFCs) as EPA implements the HFC phasedown requirements of the American Innovation and Manufacturing Act, the Laboratory examined its operations and activities that use HFCs. Refrigerants in existing air conditioning and refrigeration equipment account for 78 percent of the 13,270 lbs of HFCs in use. Based on a review of leaks associated with Laboratory HFC refrigeration and air conditioning equipment over the last five years, current supplies of HFC-407C and HFC-401A are sufficient to meet anticipated future needs for system leaks. Current supplies of HFC-134a are insufficient to meet future leak repair needs of existing equipment and actions have been taken to increase this supply.

#### REFERENCES AND BIBLIOGRAPHY

- 40 CFR 60 Subpart Db. Standards of Performance for Industrial-Commercial-Institutional Steam Boilers, 72 FR 32742, Jun. 13, 2007, as amended by 79 FR11249, February 27, 2014.
- 40 CFR 61 Subpart H. National Emission Standards for Emissions of Radionuclides Other Than Radon from Department of Energy Facilities. 54 FR 51695, Dec. 15, 1989, as amended by 67 FR 57166, September 9, 2002.
- BNL 2018, Long-Term Surveillance and Maintenance Manual for the High Flux Beam Facility, Brookhaven National Laboratory, Upton, NY. (Rev 5) August 2018.
- BNL, 2021. FY 2022 Site Sustainability Plan Brookhaven National Laboratory, December 7, 2020.
- DOE 2011. DOE Order 458.1. Radiation Protection of the Public and the Environment. U.S. Department of Energy, Washington, DC. Admin Chg. 4, September 15, 2020.
- NYCRR Subpart 227-2, Title 6. Reasonably Available Control Technology for Oxides of Nitrogen. New York State Department of Environmental Conservation, Albany, NY., Amended November 11, 2019.
- Executive Order 13693, 2015. Planning for Federal Sustainability in the Next Decade. US Federal Register, March 25, 2015. Revoked by EO 1834, May 17, 2018.
- Executive Order 13834, 2018. Efficient Federal Operations. US Federal Register May 22, 2018. Revoked by EO 14057, December 8, 2021
- Shlein, Bernard, et al., (eds). 1998. Handbook of Health Physics and Radiological Health, Third Edition. Williams and Wilkins, Baltimore, MD.
- USC Title 42, Chapter 85. Air Pollution Prevention and Control (Clean Air Act), 1990.



Wastewater generated from operations at Brookhaven National Laboratory (BNL) is treated at the Sewage Treatment Plant (STP) before it is discharged to nearby groundwater recharge basins. Some wastewater may contain very low levels of radiological, organic, or inorganic contaminants. Monitoring, pollution prevention, and vigilant operation of treatment facilities ensure that these discharges comply with all applicable regulatory requirements and that the public, employees, and the environment are protected.

Analytical data for 2021 shows that the average gross alpha and beta activity levels in the STP discharge (EA, Outfall 001) were within the typical range of historical levels and were well below New York State Drinking Water Standards (NYS DWS). Tritium was detected just above the method detection limit (MDL) in the STP discharge during December 2021; no cesium-137, strontium-90, or other gamma-emitting nuclides attributable to Laboratory operations were detected. Non-radiological monitoring of the STP effluent showed that all organic and inorganic parameters were within State Pollutant Discharge Elimination System (SPDES) effluent limits or other applicable standards.

The average concentrations of gross alpha and beta activity in stormwater and cooling water discharged to recharge basins were within typical ranges and no gamma-emitting radionuclides were detected. Disinfection byproducts continue to be detected at low concentrations above the MDL in discharges to recharge basins due to the use of chlorine and bromine for the control of algae and bacteria in potable and cooling water systems. Inorganics (e.g., metals) were detected; however, their presence is due primarily to sediment runoff in stormwater discharges.

The Peconic River did not flow offsite in 2021. Radiological data from Peconic River surface water sampling show that the average concentrations of gross alpha and gross beta activity from on-site locations were indistinguishable from control locations, and all detected levels were below the applicable NYS DWS. No gamma-emitting radionuclides attributable to Laboratory operations were detected either upstream or downstream of the former STP outfall, and tritium was not detected above MDL's in any of the surface water samples.

## 5.1 SURFACE WATER MONITORING PROGRAM

In addition to monitoring discharges to surface waters under the State Pollutant Discharge Elimination System (SPDES) program described in Chapter 3, BNL routinely monitors surface water quality (including radionuclides) as part of its site Surveillance Program. Although discharges of treated wastewater from the Laboratory's STP into the headwaters of the Peconic River ceased in October 2014, the Laboratory continues to monitor surface water at several locations along the Peconic River to assess the impact that site operations may have on surface water quality.

On-site monitoring station HY is located upstream of all Laboratory operations and provides information on the background water quality of the Peconic River (see Figure 5-1). The Carmans River is monitored as a geographic control location for comparative purposes, as it is not affected by operations at BNL and is not connected to the Peconic River watershed.

On the Laboratory site, the Peconic River is an intermittent, groundwater-fed stream. Off-site flow occurs only after periods of sustained precipitation and a concurrent rise in the water table, typically in the spring. There was no off-site flow in 2021. The fluctuating cycles with periods of


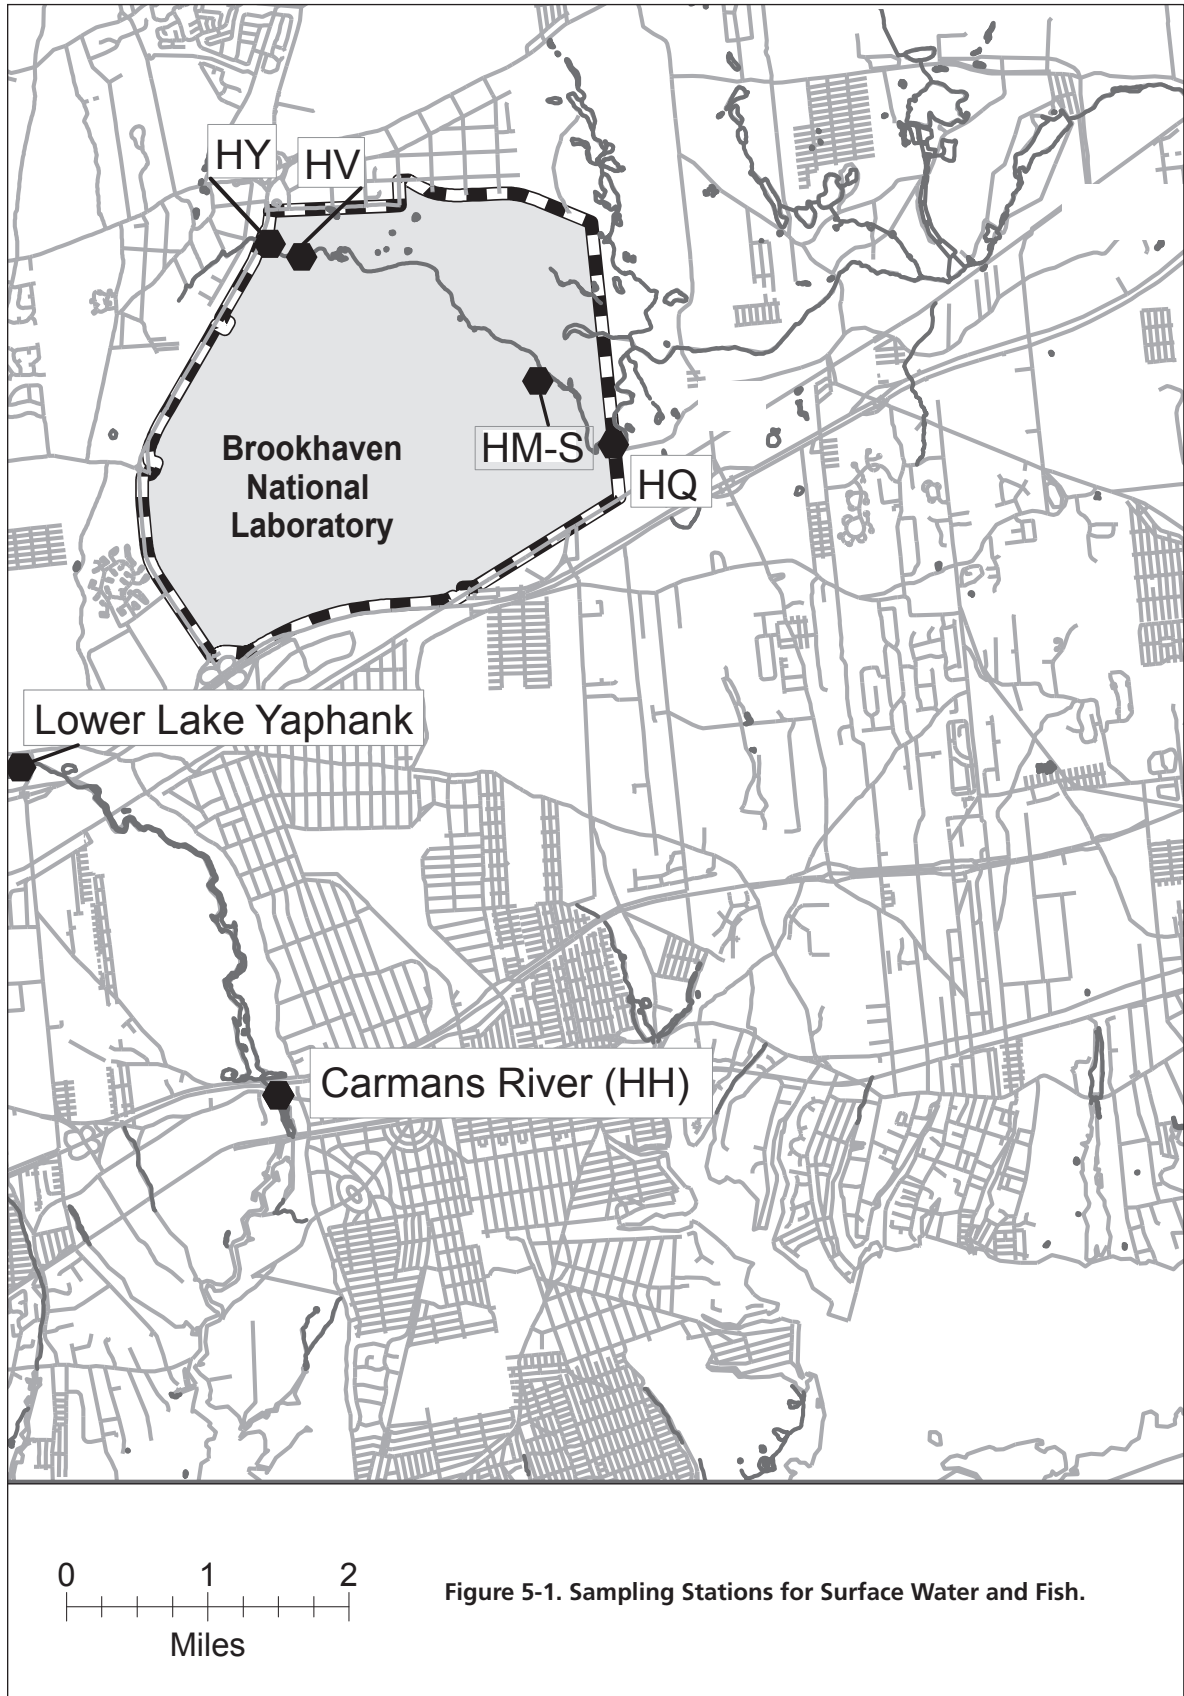


Figure 5-1. Sampling Stations for Surface Water and Fish.

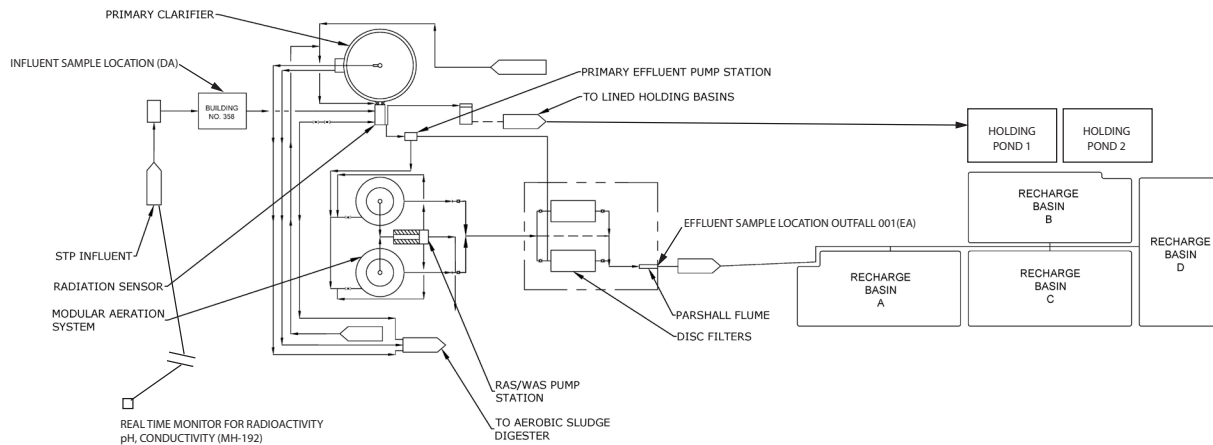

**Figure 5-2. Schematic of BNL's Sewage Treatment Plant (Recharge Basin Discharge)**

flow and no-flow are indicative of the combined influences of precipitation and groundwater. The cycles can sometimes occur over short periods of time, but low groundwater levels often result in several years where no or little flow occurs.

Historical monitoring data indicates no significant variations in water quality throughout the Peconic River system on site, and pollution prevention efforts at the Laboratory have significantly reduced the risk of accidental releases. The following sections describe BNL's surface water monitoring and surveillance program.

## 5.2 SANITARY SYSTEM EFFLUENTS

The STP effluent (Outfall 001) is a discharge point authorized under BNL's SPDES permit that is issued by the New York State Department of Environmental Conservation (NYSDEC) (Section 3.6.1). Figure 5-2 shows a schematic for discharge of treated STP effluent to nearby groundwater recharge basins. The Laboratory's STP treatment process includes three principal steps: 1) aerobic oxidation for secondary removal of biological matter and nitrification of ammonia, 2) secondary clarification, and 3) filtration for final solids removal. Tertiary treatment for nitrogen removal is also provided by controlling the oxygen levels in the aeration tanks. During the aeration process, the oxygen levels are allowed to drop to the point where microorganisms use nitrate-bound oxygen

for respiration; this liberates nitrogen gas and consequently reduces the concentration of nitrogen in the STP discharge.

Solids separated in the clarifier are pumped to aerobic digesters for continued biological solids reduction and sludge thickening. Once the sludge in the aerobic digester reaches a solids content of six percent, the sludge is sampled to ensure it meets the waste acceptance criteria for disposal at the Suffolk County Department of Public Works Sewage Treatment Facility at Bergen Point, in West Babylon, New York.

Real-time monitoring of the sanitary waste stream for radioactivity, pH, and conductivity occurs at two locations. The first site, MH-192, is approximately one mile upstream of the STP and provides a minimum of 30 minutes to warn the STP operators that wastewater exceeding SPDES limits or BNL administrative effluent release criteria is en route. The second monitoring site is at the point where the STP influent enters the treatment process.

Based on the data collected by the real-time monitoring systems, any influent to the STP that may not meet SPDES limits and BNL effluent release criteria can be diverted to two double-lined holding ponds. The total combined capacity of the two holding ponds exceeds six million gallons, or approximately 18 days of flow. Diversion would continue until the influent water quality

Table 5-1: Tritium and Gross Activity in Water at the Sewage Treatment Plant (2021)

		Flow (liters)	Tritium (pCi/L)		Gross Alpha (pCi/L)		Gross Beta (pCi/L)	
			max.	avg.	max.	avg.	max.	avg.
January	influent	1.56E+07	< 339	< MDL	< 16.7	1.5 ± 2.7	7.9 ± 4.5	5.0 ± 2.4
	effluent	1.70E+07	< 334	< MDL	< 5.6	-0.4 ± 0.8	4.9 ± 1.5	3.3 ± 1.3
February	influent	1.73E+07	< 422	< MDL	< 9.9	3.5 ± 0.9	8.9 ± 3.3	6.1 ± 1.9
	effluent	1.68E+07	< 413	< MDL	< 4.9	1.0 ± 2.5	4.6 ± 1.3	3.5 ± 1.0
March	influent	2.42E+07	< 409	< MDL	< 15.7	1.9 ± 4.5	11.0 ± 4.9	7.0 ± 2.7
	effluent	2.27E+07	< 416	< MDL	< 3.4	0.0 ± 0.5	3.5 ± 1.4	2.7 ± 0.4
April	influent	1.66E+07	< 322	< MDL	< 9.6	1.8 ± 2.6	4.8 ± 2.5	4.0 ± 1.1
	effluent	2.26E+07	< 343	< MDL	< 4.4	0.5 ± 0.5	3.1 ± 0.5	2.3 ± 0.6
May	influent	1.73E+07	< 305	< MDL	4.9 ± 3.2	3.6 ± 0.9	4.6 ± 2.0	3.8 ± 1.2
	effluent	2.52E+07	< 305	< MDL	< 2.8	0.0 ± 1.9	4.7 ± 1.4	3.2 ± 1.1
June	influent	2.99E+07	< 348	< MDL	< 13.4	4.4 ± 4.8	8.7 ± 3.3	4.0 ± 2.9
	effluent	3.16E+07	< 344	< MDL	6.5 ± 4.4	3.2 ± 2.6	5.7 ± 1.3	4.4 ± 1.1
July	influent	3.55E+07	< 340	< MDL	11.4 ± 9.0	8.0 ± 3.6	16.0 ± 3.9	6.1 ± 4.9
	effluent	3.10E+07	< 329	< MDL	< 7.3	2.2 ± 3.1	4.8 ± 1.4	3.7 ± 1.0
August	influent	3.95E+07	< 400	< MDL	< 4.4	1.0 ± 0.9	4.2 ± 1.4	1.8 ± 1.6
	effluent	3.39E+07	< 398	< MDL	< 9.1	0.8 ± 1.0	7.4 ± 3.4	3.8 ± 1.9
September	influent	2.41E+07	< 372	< MDL	< 6.8	2.2 ± 1.6	9.0 ± 4.7	4.3 ± 3.2
	effluent	2.42E+07	< 373	< MDL	< 7.6	0.5 ± 1.0	5.5 ± 1.9	3.9 ± 1.3
October	influent	2.10E+07	< 306	< MDL	8.3 ± 5.1	2.5 ± 3.8	9.0 ± 2.4	4.6 ± 2.9
	effluent	2.20E+07	< 386	< MDL	7.3 ± 3.9	2.8 ± 3.1	8.8 ± 1.7	4.2 ± 3.1
November	influent	2.31E+07	< 395	< MDL	4.5 ± 3.0	2.1 ± 1.6	3.6 ± 1.1	2.3 ± 0.6
	effluent	3.21E+07	< 486	< MDL	< 4.6	1.2 ± 1.9	8.2 ± 3.7	4.3 ± 2.3
December	influent	1.71E+07	< 409	< MDL	< 4.6	2.5 ± 1.4	4.5 ± 1.6	2.8 ± 1.2
	effluent	2.07E+07	450 ± 271	75.1 ± 252.3	< 8.3	2.9 ± 2.1	5.3 ± 1.6	3.2 ± 1.5
Annual Avg.	influent			< MDL		2.9 ± 0.9		4.3 ± 0.8
	effluent			< MDL		1.2 ± 0.6		3.6 ± 0.4
<b>Total Release</b>		<b>3.00E+08</b>		<b>2.6 mCi (a)</b>		<b>0.4 mCi</b>		<b>1.1 mCi</b>
<b>Average MDL (pCi/L)</b>				<b>372.4</b>		<b>4.7</b>		<b>1.8</b>
<b>SDWA Limit (pCi/L)</b>				<b>20000</b>		<b>15</b>		<b>50 (b)</b>

Notes:  
 All values above MDL are reported with a 95% confidence interval.  
 To convert values from pCi to Bq, divide by 27.03.  
 Negative numbers occur when the measured value is lower than background (see Appendix B for description).  
 MDL = minimum detection limit  
 SDWA = Safe Drinking Water Act

- (a) The total released value for tritium is a conservative calculation that is based on an average of the 95% confidence interval maximums as estimates of monthly average release concentrations. The majority of the effluent samples showed average concentrations less than zero and all results were less than the MDL.
- (b) The drinking water standards were changed from 50 pCi/L (concentration based) to 4 mrem/yr (dose based) in 2003. As gross beta activity does not identify specific radionuclides, a dose equivalent cannot be calculated for the values in the table.

would allow for the permit limits and release criteria to be met. Wastewater diverted to the holding ponds is tested and evaluated against the requirements for release. If necessary, the wastewater is treated and then reintroduced into the STP at a rate that ensures compliance with SPDES permit limits for nonradiological parameters or BNL effluent release criteria for radiological

parameters. In 2021, there were no instances where influent water quality required diversion of wastewater to the hold-up ponds.

### 5.2.1 Sanitary System Effluent–Radiological Analyses

Wastewater at the STP is sampled at the inlet to the treatment process, Station DA, and at the

STP outfall, Station EA, as shown in Figure 5-2. At each location, samples are collected on a flow-proportional basis; that is, for every 1,000 gallons of water treated, approximately four fluid ounces of sample are collected and composited into a five-gallon collection container. These samples are analyzed weekly for gross alpha and gross beta activity and for tritium. Samples collected from these locations are also composited and analyzed monthly for gamma-emitting radionuclides and strontium-90 (Sr-90: half-life, 29 years).

Although the STP discharge is not used as a direct source of potable water, the Laboratory applies the more stringent Safe Drinking Water Act (SDWA) standards for comparison purposes when monitoring the effluent, in lieu of Department of Energy wastewater criteria. Under the SDWA, water standards are based on a 4 mrem (40  $\mu$ Sv) dose limit. The SDWA specifies that no individual may receive an annual dose greater than 4 mrem from radionuclides that are beta or photon emitters, which includes up

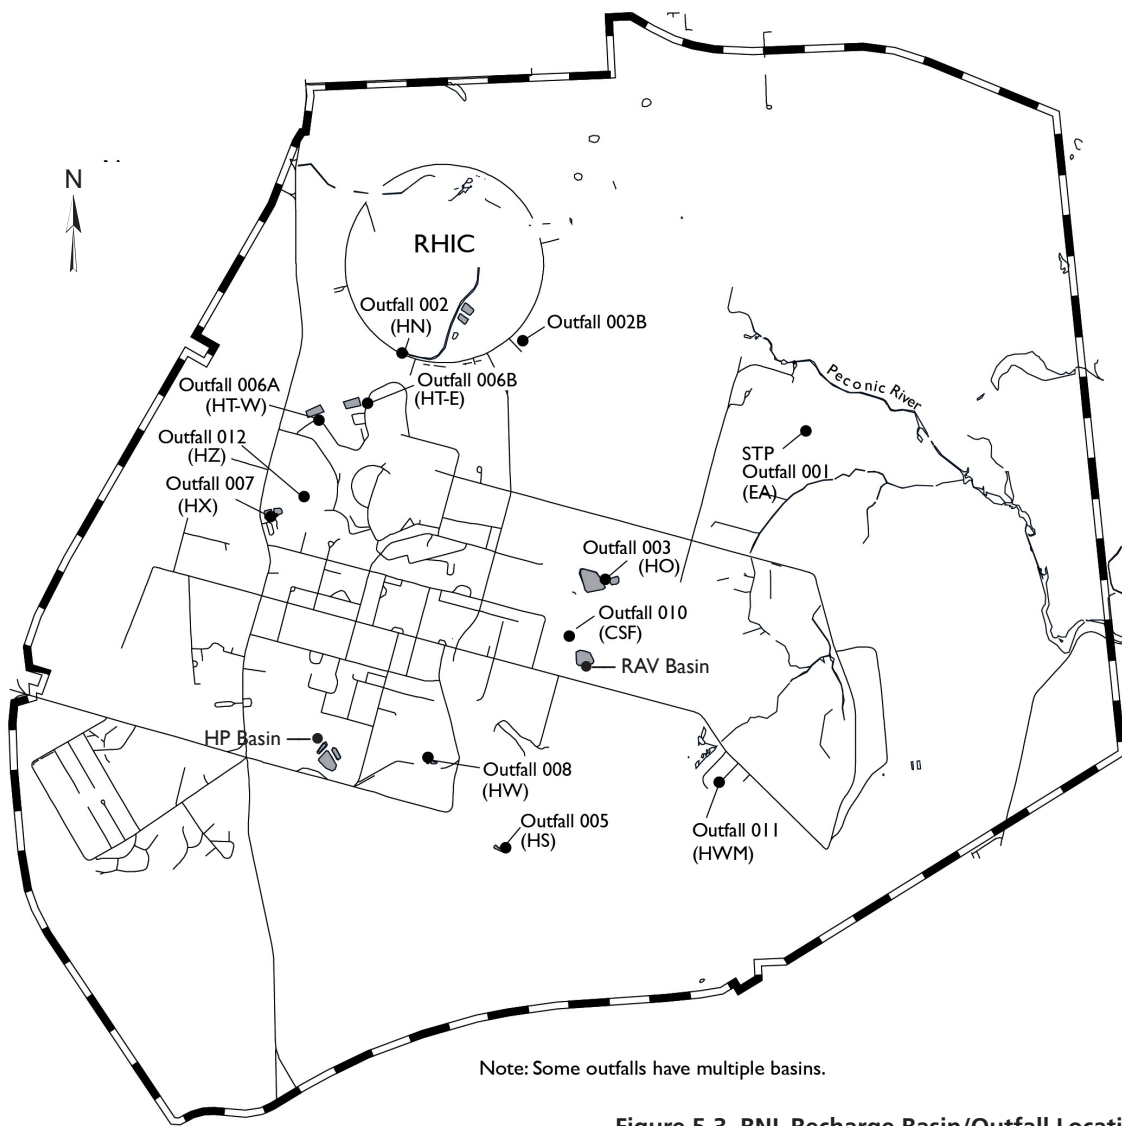


Figure 5-3. BNL Recharge Basin/Outfall Locations.



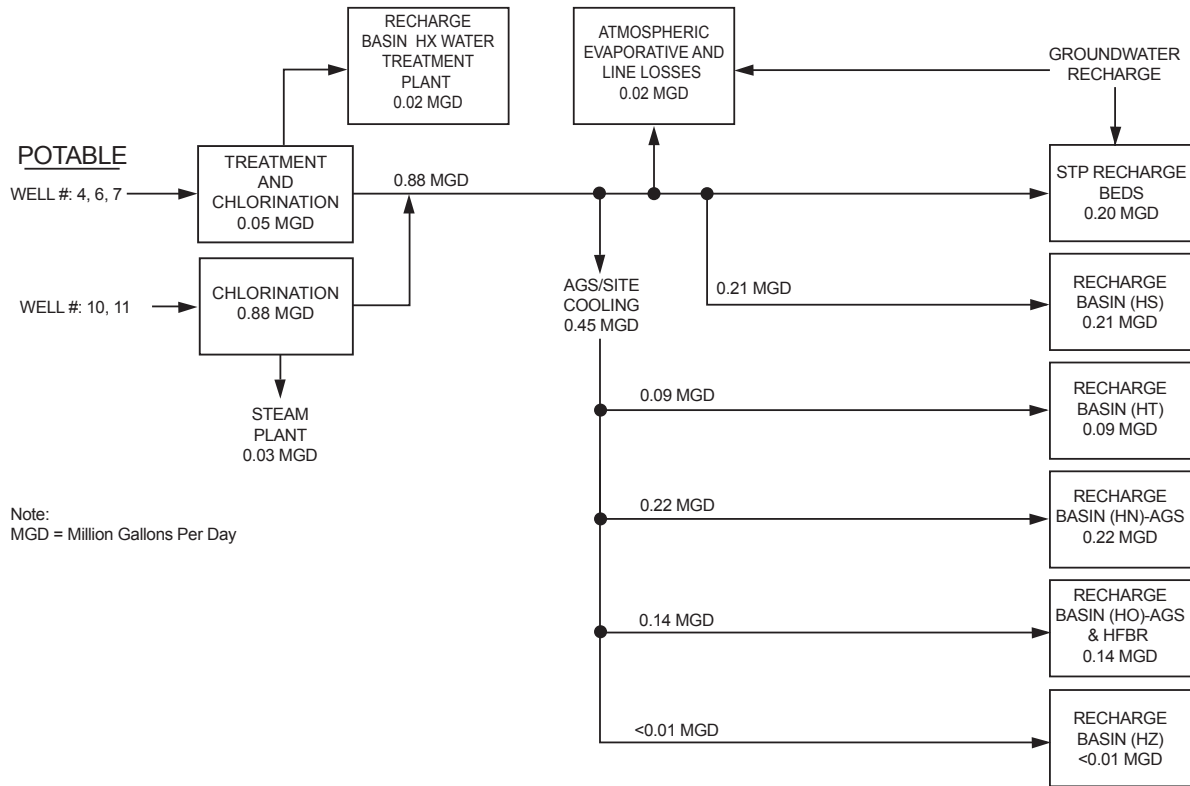


Figure 5-4. Schematic of Potable Water Use and Flow at BNL.

to 168 individual radioisotopes. BNL performs radionuclide-specific gamma analysis to ensure compliance with this standard. The SDWA annual average gross alpha activity limit is 15 pCi/L, including radium-226 (Ra-226: half-life, 1,600 years), but excluding radon and uranium. Other SDWA-specified drinking water limits are 20,000 pCi/L for tritium (H-3: half-life, 12.3 years), 8 pCi/L for Sr-90, 5 pCi/L for Ra-226 and Ra-228 (Ra-228: half-life, 5.75 years), and 30 µg/L for uranium. Gross alpha and beta activity measurements are used as a screening tool for detecting the presence of radioactivity.

Table 5-1 shows the monthly gross alpha and beta activity data and tritium concentrations for the STP influent and effluent during 2021. Annual average gross alpha and beta activity levels in the STP effluent were 1.2 ± 0.6 pCi/L and 3.6 ± 0.4 pCi/L, respectively. Both gross alpha and gross beta average concentrations were higher than those measured at the Carman’s River control location (HH) reported in Table 5-5; however,

they were well below the SDWA standards that are used for comparison purposes. Tritium was detected above the MDL in the discharge of the STP (EA, Outfall 001) during December 2021 with the maximum concentration being 450 ± 271 pCi/L and an average of 75.1 ± 252 pCi/L, both well below the SDWA standard of 20,000 pCi/L. In 2021, there were no gamma-emitting nuclides detected in the STP effluent.

**5.2.2 Sanitary System Effluent – Nonradiological Analyses**

Monitoring of the STP effluent for volatile organic compounds (VOCs), inorganics, and anions is conducted as part of the SPDES Compliance Program, which is discussed in further detail in Chapter 3.

**5.3 PROCESS-SPECIFIC WASTEWATER**

Wastewater that may contain constituents above SPDES permit limits or ambient water quality discharge standards must be held by the

generating facility and characterized to determine the appropriate means of disposal. The analytical results are compared with the appropriate discharge limit, and the wastewater is only released to the sanitary system if the volume and concentration of contaminants in the discharge would not jeopardize the quality of the STP effluent and subsequently, potentially impact groundwater quality (BNL 2020).

The Laboratory's SPDES permit includes requirements for quarterly sampling and analysis of process-specific wastewater discharged from metal-cleaning operations in Building 498 and cooling tower discharges from Building 902. These operations are monitored for contaminants such as metals, cyanide, VOCs, and semi-volatile organic compounds. In 2021, analyses of these waste streams showed that, although several operations contributed contaminants (principally metals) to the STP influent in concentrations exceeding SPDES-permitted levels, these discharges did not affect the quality of the STP effluent.

Process wastewaters that are not expected to be of consistent quality and are not routinely generated are held for characterization before release to the sanitary system. The process wastewaters typically include purge water from groundwater sampling, wastewater from cleaning of heat exchangers, wastewater generated as a result of restoration activities, and other industrial wastewaters. To determine the appropriate disposal method, samples are analyzed for contaminants specific to the process, and the concentrations are compared to the SPDES effluent limits and BNL's effluent release criteria (BNL 2020). If the concentrations are within limits, authorization for sewer system discharge is granted; if not, alternate means of disposal are used. Any waste that contains elevated levels of hazardous or radiological contaminants in concentrations that exceeded Laboratory effluent release criteria are sent to the BNL Waste Management Facility for proper management and off-site disposal.

#### 5.4 RECHARGE BASINS

Recharge basins are used for the discharge of "clean" wastewater, including once-through cooling water, stormwater runoff, and cooling tower blowdown. These wastewaters are suitable for

direct replenishment of the groundwater aquifer. Figure 5-3 shows the locations of the Laboratory's discharges to recharge basins (also called "outfalls" under BNL's SPDES permit). Figure 5-4 presents an overall schematic of potable water use at the Laboratory, and how much of this water is discharged to the 11 on-site recharge basins:

- Basins HN, HT-W, and HT-E receive once-through cooling water discharges generated at the Alternating Gradient Synchrotron (AGS), Linear Accelerator, and Relativistic Heavy Ion Collider (RHIC), as well as cooling tower blowdown and stormwater runoff.
- Basin HS receives predominantly stormwater runoff, once-through cooling water from Building 555 (Chemistry Department), and minimal cooling tower blowdown from the Computational Science Initiative facility.
- Basin HX receives Water Treatment Plant filter backwash water.
- Basin HO receives cooling water discharges from the AGS and stormwater runoff from the area surrounding the High Flux Beam Reactor (HFBR).

Several other recharge areas are used exclusively for discharging stormwater runoff. These areas include Basin HW near the National Synchrotron Light Source II (NSLS-II) site, Basin CSF at the Central Steam Facility (CSF), and Basin HW-M at the former Hazardous Waste Management Facility (FHWMF). Recharge Basins HP and RAV are used for discharge of treated water from the groundwater remediation systems and are monitored under BNL's Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) equivalency permits.

Each of the recharge basins is a permitted point-source discharge under the Laboratory's SPDES permit and equivalency permits under the CERCLA program. Where required by the permit, the basins are equipped with a flow monitoring station, allowing for weekly recordings of flow rates. The specifics of the SPDES compliance monitoring program are provided in Chapter 3. To supplement the monitoring program, samples are also routinely collected and analyzed under BNL's Environmental Surveillance Program for radioactivity, VOCs, metals, and anions. During 2021, water samples were collected from all

the basins listed above semi-annually except for recharge Basin HX at the Water Treatment Plant (due to previously documented non-impact to groundwater from plant operations) and a recharge basin at the FHWMF (due to absence of operations at the FHWMF that could lead to the contamination of runoff).

**5.4.1 Recharge Basins – Radiological Analyses**

Discharges to the recharge basins were sampled semi-annually and analyzed for gross alpha and beta activity, gamma-emitting radionuclides, and tritium. The results are presented in Table 5-2. Gross alpha activity ranged from non-detect to  $3.03 \pm 1.61$  pCi/L and gross beta activity ranged from non-detect to  $5.07 \pm 1.07$  pCi/L. Low-level detections of beta activity are attributable to naturally occurring radionuclides, such as potassium-40 (K-40: half-life,  $1.3E+09$  years). No gamma-emitting nuclides attributable to BNL operations or tritium were detected in any discharges to recharge basins. All tritium values were below the MDL's and were well below the 20,000 pCi/L drinking water standard.

**5.4.2 Recharge Basins – Nonradiological Analyses**

During 2021, discharge samples were collected semi-annually for water quality parameters, metals, and VOCs. Field-measured parameters (e.g., pH, conductivity, and temperature) were routinely monitored and recorded. The water quality and metals analytical results are summarized in Tables 5-3 and 5-4, respectively. The nonradiological analytical results are compared to groundwater discharge standards promulgated under Title 6 of the New York Codes, Rules, and Regulations (NYCRR), Part 703.6.

Low concentrations of disinfection byproducts were periodically detected above the MDL's in discharges to several of the basins throughout the year. Sodium hypochlorite and bromine, used to control bacteria in the drinking water and algae in cooling towers, can break down to bromoform, chloroform, dibromochloromethane, and dichlorobromomethane. Concentrations were above the 1 µg/L MDL at Basins HO, HT-E, HT-W, and HN for all disinfection byproducts, the highest

**Table 5-2: Radiological Analysis of Samples from On-Site Recharge Basins (2021)**

Basin		Gross Alpha	Gross Beta	Tritium
		(pCi/L)		
	<i>No. of samples</i>	2	2	2
HN	<i>max.</i>	< 4.89	$1.77 \pm 1.34$	< 380
	<i>avg.</i>	< MDL	$1.4 \pm 0.73$	< MDL
HO	<i>max.</i>	< 1.45	$2.57 \pm 1.62$	< 377
	<i>avg.</i>	< MDL	$1.92 \pm 1.26$	< MDL
HS	<i>max.</i>	$2.14 \pm 0.91$	$1.38 \pm 0.44$	< 334
	<i>avg.</i>	$0.17 \pm 3.87$	$-0.84 \pm 4.35$	< MDL
HT-E	<i>max.</i>	$0.79 \pm 0.5$	$1.83 \pm 0.48$	< 374
	<i>avg.</i>	< MDL	< MDL	< MDL
HT-W	<i>max.</i>	< 1.66	$2.22 \pm 0.87$	< 345
	<i>avg.</i>	< MDL	$2.18 \pm 0.08$	< MDL
HW	<i>max.</i>	$3.03 \pm 1.61$	$5.07 \pm 1.07$	< 339
	<i>avg.</i>	$2.75 \pm 0.55$	$3.54 \pm 2.99$	< MDL
HZ	<i>max.</i>	< 1.92	$2.31 \pm 0.78$	< 387
	<i>avg.</i>	< MDL	$1.57 \pm 1.46$	< MDL
<b>SDWA Limit</b>		<b>15</b>	<b>(a)</b>	<b>20,000</b>

Notes:

See Figure 5-3 for recharge basin/outfall locations.

All values above MDL reported with a 95% confidence interval.

Negative numbers occur when the measured value is lower than background (see Appendix B for description).

To convert values from pCi to Bq, divide by 27.03.

(a) The drinking water standard was changed from 50 pCi/L (concentration based) to 4 mrem/yr (dose based) in 2003. As gross beta activity does not identify specific radionuclides, a dose equivalent of this value cannot be calculated.

MDL = minimum detection limit

SDWA = Safe Drinking Water Act

values all being under 9.1 µg/L, which was the highest value recorded for bromoform. The only other VOC detected above MDL's was toluene, which was detected in HS Basin during August 2021 at an estimated concentration of 0.97 µg/L, well below the reporting limit of 5 µg/L.

The analytical data presented in Table 5-3 show that, for 2021, the concentrations of all analytes were within effluent standards, except for chlorides. Historically, chlorides are found to be higher in samples collected during the winter and are attributed to road salt used to control snow and ice buildup. The period surrounding the high values correspond

Table 5-3: Water Quality Data for Onsite Recharge Basins (2021)

ANALYTE	Recharge Basin									NYSDEC Effluent Standard	Typical MDL
	HN (RHIC)	HO (AGS/HFBR)	HS (s)	HT-W (Linac)	HT-E (AGS)	HW (s)	CSF (s)	HZ (s)			
<i>No. of samples</i>	2	2	2	2	2	2	2	2	2		
pH (SU)	<i>min.</i>	7.5	7.9	7.2	8.2	7.6	7.5	7.7	8.0	6.5 - 9.0	NA
	<i>max.</i>	7.7	8.4	7.3	8.8	7.7	7.5	7.8	8.0		
Conductivity (µS/cm)	<i>min.</i>	362	366	510	370	42	82	87	366	SNS	NA
	<i>max.</i>	1189	665	1278	385	2635	332	1070	401		
	<i>avg.</i>	775.5	515.5	894	377.5	1338.5	207	578.5	383.5		
Temperature (Deg. C)	<i>min.</i>	7.6	13	3.9	12.3	0.7	7.5	4.5	8.9	SNS	NA
	<i>max.</i>	22.3	25	22.4	24	23.7	23.1	22.6	22		
	<i>avg.</i>	15.0	19.0	13.2	18.2	12.2	15.3	13.6	15.5		
Dissolved oxygen (mg/L)	<i>min.</i>	8.3	8.9	7.2	8.5	8.5	8.4	8.6	8.7	SNS	NA
	<i>max.</i>	11.0	11.2	12.4	10.3	13.1	12.9	13.4	11.4		
	<i>avg.</i>	9.7	10.0	9.8	9.4	10.8	10.7	11.0	10.0		
Chlorides (mg/L)	<i>min.</i>	61	62	110	66	2	8.1	5.6	65	500	18.4
	<i>max.</i>	330	420	2800	200	21000	84	300	70		
	<i>avg.</i>	195.5	241	1455	133	10501	46.05	152.8	67.5		
Sulfates (mg/L)	<i>min.</i>	8.9	9.5	11	11	1.4	1.4	2.1	9.7	500	11.8
	<i>max.</i>	9.6	12	31	13	1.4	2.7	3.2	11		
	<i>avg.</i>	9.3	10.8	21.0	12.0	1.4	2.1	2.7	10.4		
Nitrate as nitrogen (mg/L)	<i>min.</i>	0.6	0.5	0.6	0.6	0.1	0.1	0.1	0.5	10	0.1
	<i>max.</i>	0.9	0.7	0.9	0.7	1.1	0.3	0.3	0.7		
	<i>avg.</i>	0.8	0.6	0.7	0.7	0.6	0.2	0.2	0.6		

## Notes:

See Figure 5-3 for recharge basin/outfall locations.

NA = not applicable

(s) = stormwater

NYSDEC = New York State Department of Environmental Conservation

AGS = Alternating Gradient Synchrotron

RHIC = Relativistic Heavy Ion Collider

Linac = Linear Accelerator

SNS = effluent standard not specified

to precipitation events in February 2021. The data in Table 5-4 show that all parameters complied with the respective water quality or groundwater discharge standards. The data for sodium at basin HT-E coincides with the chlorides shown in Table 5-3 indicating road salts as the source.

### 5.4.3 Stormwater Assessment

All recharge basins receive stormwater runoff. Stormwater at BNL is managed by collecting runoff from paved surfaces, roofs, and other impermeable surfaces and directing it to recharge basins via underground piping and above-grade vegetated swales. Recharge Basin HS receives most of the stormwater runoff from the central, developed

portion of the Laboratory site. Basins HN, HZ, HT-W, and HT-E receive runoff from the Collider-Accelerator complex. Basin HO receives runoff from the area surrounding the HFBR. Basin CSF receives runoff from the CSF area and along Cornell Avenue east of Renaissance Road. Basin HW receives runoff from the NSLS-II site, and HW-M receives runoff from the fenced area at the FHWMF.

Stormwater runoff at the Laboratory typically has elevated levels of inorganics (i.e., metals) and has a low pH. The inorganics are attributable to high sediment content in stormwater (inorganics occur naturally in native soil). In an effort to further improve the quality of stormwater runoff on site, BNL has formal procedures for managing and maintaining outdoor

CHAPTER 5: WATER QUALITY

Table 5-4: Metals Analysis of Water Samples From BNL On-Site Recharge Basins (2021)

METAL	Recharge Basin								NYSDEC Effluent Limit or AWQS	Typical MDL	
	HO (AGS)		HT-E (AGS)		HT-W (Linac)		HZ (stormwater)				
	T	F	T	F	T	F	T	F			
<i>Total (T) or Filtered (F)</i>											
<i>No. of samples</i>	2	2	2	2	2	2	2	2	2		
<b>Ag</b> Silver (µg/L)	<i>min.</i>	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	50	2
	<i>max.</i>	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0		
	<i>avg.</i>	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0		
<b>Al</b> Aluminum (µg/L)	<i>min.</i>	< 50.0	< 50.0	65	< 50.0	< 50.0	< 50.0	< 50.0	< 50.0	2000	50
	<i>max.</i>	< 50.0	91	280	50	59	< 50.0	< 50.0	< 50.0		
	<i>avg.</i>	< 50.0	70.5	172.5	< 50.0	54.5	< 50.0	< 50.0	< 50.0		
<b>As</b> Arsenic (µg/L)	<i>min.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	50	5
	<i>max.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0		
	<i>avg.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0		
<b>Ba</b> Barium (µg/L)	<i>min.</i>	31	36	4.4	4.3	40	39	38	36	2000	20
	<i>max.</i>	39	38	410	430	52	49	41	42		
	<i>avg.</i>	35	37	207.2	217.2	46	44	39.5	39		
<b>Be</b> Beryllium (µg/L)	<i>min.</i>	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	SNS	2
	<i>max.</i>	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0		
	<i>avg.</i>	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0		
<b>Cd</b> Cadmium (µg/L)	<i>min.</i>	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	10	2
	<i>max.</i>	< 2.0	< 2.0	2.0	2.0	< 2.0	< 2.0	< 2.0	< 2.0		
	<i>avg.</i>	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0		
<b>Co</b> Cobalt (µg/L)	<i>min.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	5	5
	<i>max.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0		
	<i>avg.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0		
<b>Cr</b> Chromium (µg/L)	<i>min.</i>	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	100	10
	<i>max.</i>	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0		
	<i>avg.</i>	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0		
<b>Cu</b> Copper (µg/L)	<i>min.</i>	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	1000	10
	<i>max.</i>	< 10.0	< 10.0	10.0	< 10.0	< 10.0	< 10.0	10.0	10.0		
	<i>avg.</i>	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0		
<b>Fe</b> Iron (mg/L)	<i>min.</i>	< 0.1	< 0.1	0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	0.6	0.05
	<i>max.</i>	0.4	< 0.1	0.8	0.2	0.1	< 0.1	0.1	< 0.1		
	<i>avg.</i>	0.2	< 0.05	0.4	0.1	0.1	< 0.05	< 0.05	< 0.05		
<b>Hg</b> Mercury (µg/L)	<i>min.</i>	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	1.4	0.2
	<i>max.</i>	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2		
	<i>avg.</i>	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2		
<b>Mn</b> Manganese (µg/L)	<i>min.</i>	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0	600	4
	<i>max.</i>	11	4.0	180	170	4.0	< 4.0	4.0	< 4.0		
	<i>avg.</i>	7.4	< 4.0	91.2	87	< 4.0	< 4.0	< 4.0	< 4.0		

(continued on next page)



**Table 5-4. Metals Analysis of Water Samples from BNL On-Site Recharge Basins** (concluded).

METAL	<i>Total (T) or Filtered (F)</i>	Recharge Basin								NYSDEC Effluent Limit or AWQS	Typical MDL
		HO (AGS)		HT-E (AGS)		HT-W (Linac)		HZ (stormwater)			
		T	F	T	F	T	F	T	F		
<i>No. of samples</i>		2	2	2	2	2	2	2	2		
<b>Na</b> Sodium (mg/L)	<i>min.</i>	46	49	3.2	3.2	59	61	50	49	SNS	0.25
	<i>max.</i>	260	250	14000	14000	150	140	57	55		
	<i>avg.</i>	153	149.5	7001.6	7001.6	104.5	100.5	53.5	52		
<b>Ni</b> Nickel (µg/L)	<i>min.</i>	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	200	10
	<i>max.</i>	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0		
	<i>avg.</i>	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0	< 10.0		
<b>Pb</b> Lead (µg/L)	<i>min.</i>	< 3.0	< 3.0	< 3.0	< 3.0	< 3.0	< 3.0	< 3.0	< 3.0	50	3
	<i>max.</i>	< 3.0	< 3.0	3.0	< 3.0	< 3.0	< 3.0	3.0	< 3.0		
	<i>avg.</i>	< 3.0	< 3.0	< 3.0	< 3.0	< 3.0	< 3.0	< 3.0	< 3.0		
<b>Sb</b> Antimony (µg/L)	<i>min.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	6	5
	<i>max.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0		
	<i>avg.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0		
<b>Se</b> Selenium (µg/L)	<i>min.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	20	5
	<i>max.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0		
	<i>avg.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0		
<b>Tl</b> Thallium (µg/L)	<i>min.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	SNS	5
	<i>max.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0		
	<i>avg.</i>	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0		
<b>V</b> Vanadium (µg/L)	<i>min.</i>	< 7.0	< 7.0	< 7.0	< 7.0	< 7.0	< 7.0	< 7.0	< 7.0	SNS	7
	<i>max.</i>	70	< 7.0	< 7.0	< 7.0	< 7.0	< 7.0	< 7.0	< 7.0		
	<i>avg.</i>	< 38.5	< 7.0	< 7.0	< 7.0	< 7.0	< 7.0	< 7.0	< 7.0		
<b>Zn</b> Zinc (µg/L)	<i>min.</i>	< 20.0	< 20.0	21	< 20.0	< 20.0	< 20.0	< 20.0	< 20.0	5000	20
	<i>max.</i>	26.0	24.0	87.0	62.0	22.0	20.0	22.0	23.0		
	<i>avg.</i>	23.0	22.0	54.0	40.5	21.0	< 20.0	21.0	21.5		

**Notes:**

See Figure 5-3 for recharge basin/outfall locations.

AGS = Alternating Gradient Synchrotron

AWQS = Ambient Water Quality Standards

Linac = Linear Accelerator

work and storage areas. The requirements include covering of equipment and materials (e.g., road salt storage and bins/containers with potential to leak residual oils or any other hazardous materials) to prevent contact with stormwater, conducting an aggressive maintenance and inspection program, implementing erosion control measures during soil disturbance activities, and restoring these areas when operations cease.

Basin sediment sampling is conducted on a

five-year testing cycle to ensure these discharges comply with regulatory requirements. Basin sediments were last sampled in 2017 and data were presented in Chapter 6 of the 2017 SER. The next sampling event will occur in 2022.

### 5.5 PECONIC RIVER SURVEILLANCE

Several locations are monitored along the Peconic River to assess the overall water quality of the river and assess any impact from BNL

**Table 5-5: Radiological Results for Surface Water Samples Collected Along the Peconic and Carmans Rivers (2021)**

Sampling Station		Gross Alpha	Gross Beta	Tritium	Strontium-90
		(pCi/L)			
HY (headwaters) on site, west of the RHIC ring	N	2	2	2	2
	max	2.2 ± 0.74	1.21 ± 0.4	< 416	< 0.86
	avg	1.53 ± 1.32	0.71 ± 0.98	< MDL	0.31 ± 0.03
HV (headwaters) on site, inside the RHIC ring	N	2	2	2	NS
	max	1.3 ± 0.82	1.1 ± 0.59	< 373	-
	avg	1.05 ± 0.5	0.93 ± 0.33	< MDL	-
HM-S tributary, on-site	N	1	1	1	1
	max	< 1.16	< 0.9	< 396	< 4.2
	avg	NA	NA	NA	NA
HQ downstream of STP, at BNL site boundary	N	NS	NS	NS	NS
	max	-	-	-	-
	avg	-	-	-	-
Carmans River control Location, off-site	N	2	2	2	2
	max	< 1.48	1.9 ± 0.71	< 380	0.3 ± 0.19
	avg	0.63 ± 0.93	1.72 ± 0.35	< MDL	0.08 ± 0.44
<b>SDWA Limit (pCi/L)</b>		<b>15</b>	<b>(a)</b>	<b>20,000</b>	<b>8</b>

**Notes:**

See Figure 5-1 sampling station locations.  
 All values reported with a 95% confidence interval.  
 To convert values from pCi to Bq, divide by 27.03.  
 MDL = minimum detection limit  
 N = number of samples analyzed  
 NA = not applicable  
 NS = not sampled due to dry conditions  
 RHIC = Relativistic Heavy Ion Collider

SDWA = Safe Drinking Water Act  
 STP = Sewage Treatment Plant  
 (a) The drinking water standard was changed from 50 pCi/L (concentration based) to 4 mrem/yr (dose based) in 2003. Because gross beta activity does not identify specific radionuclides, a dose equivalent cannot be calculated for the values in the table.

operations. Sampling points along the Peconic River are identified in Figure 5-1. In total, four stations (two upstream and two downstream of the former STP discharge) were sampled in 2021. A sampling station along the Carmans River (HH) was also monitored as a geographic control location not affected by Laboratory operations or located within the Peconic River watershed. The following locations were monitored for radiological and nonradiological parameters:

Upstream sampling station:

- HY, on site, immediately east of William Floyd Parkway
- HV, on site, just east of the 10 o'clock experimental hall in the RHIC Ring, radiological only

Downstream sampling stations:

- HM-S, on site, at east firebreak south of mainstem of Peconic
- HQ, on site, at east boundary of BNL (no offsite flow occurred in 2021)

Control location:

- HH, Carmans River

**5.5.1 Peconic River – Radiological Analyses**

During 2021, radionuclide analyses were performed on surface water samples collected from three of the four Peconic River sampling locations (HQ was dry throughout the year) and the Carmans River control location. HM-N, located at the east firebreak, was removed from sampling as HY and HV allow for radiological assessment of potential RHIC impacts and no other contributions from potential BNL operations enter the river until the tributary monitoring at HM-S. HQ sampling station is the final monitoring location before the river flows off site.

In 2021, the Peconic River flow continued to be low. Two samples were able to be taken at the upper sampling locations and a single sample was taken at HM-S. The radiological data from Peconic River surface water samples are

**Table 5-6: Water Quality Analytical Results for Surface Water Samples Collected Along the Peconic and Carmans Rivers (2021)**

Analyte	Peconic River Station Locations				NYSDEC Effluent Standard	Typical MDL
	HY	HM-S	HQ	Carmans River HH (Control)		
<i>No. of samples</i>	2	1	NS	2		
pH (SU)	<i>min.</i>	4.3	-	-	6.5 - 8.5	NA
	<i>max.</i>	6.8	4.0	-		
	<i>avg.</i>	5.5	-	-		
Conductivity (µS/cm)	<i>min.</i>	75.0	-	-	SNS	NA
	<i>max.</i>	112	-	-		
	<i>avg.</i>	93.5	-	-		
Temperature (deg C)	<i>min.</i>	5.9	-	-	SNS	NA
	<i>max.</i>	21.4	9.8	-		
	<i>avg.</i>	13.7	-	-		
Dissolved oxygen (mg/L)	<i>min.</i>	7.3	-	-	SNS	NA
	<i>max.</i>	9.7	-	-		
	<i>avg.</i>	8.5	-	-		
Chlorides (mg/L)	<i>min.</i>	12.0	-	-	250	0.6
	<i>max.</i>	13.0	4.0	-		
	<i>avg.</i>	12.5	-	-		
Sulfate (mg/L)	<i>min.</i>	1.6	-	-	250	1.8
	<i>max.</i>	2.5	1.3	-		
	<i>avg.</i>	2.1	-	-		
Nitrate as nitrogen (mg/L)	<i>min.</i>	0.2	-	-	10	0.3
	<i>max.</i>	3.1	1.0	-		
	<i>avg.</i>	1.7	-	-		

**Notes:**

See Figure 5-1 for monitoring locations.

HY = Peconic River headwaters, on site, east of Wm Floyd Pkwy.

HQ = Peconic River on site at east boundary

HM-S = Peconic River tributary at east firebreak

HH = Carmans River control location, off site

NYSDEC = New York State Department of Environmental Conservation

SNS = effluent standard not specified

NS = sample not taken due to dry conditions

summarized in Table 5-5. Radiological analysis of water samples collected from all locations had very low concentrations of gross alpha and gross beta activity that were attributed to natural sources. All detected levels were below the applicable NYS DWS. Tritium values were below MDLs at all locations on the Peconic and Carmans Rivers. Sr-90 was detected just above the detection limit at 0.3 pCi/L at station HH on the Carmans River and all other values were below MDLs.

### 5.5.2 Peconic River – Nonradiological Analyses

River water samples collected in 2021 were analyzed for water quality parameters (e.g., pH, temperature, conductivity, and dissolved oxygen), anions (e.g., chlorides, sulfates, and nitrates), metals, and VOCs. The analytical data for the Peconic River and Carmans River samples are summarized in Table 5-6 (water quality) and Table 5-7 (metals). The only VOC detected was carbon

CHAPTER 5: WATER QUALITY

Table 5-7: Metals Analytical Results for Surface Water Samples Collected Along the Peconic and Carmans Rivers (2021)

METAL	Peconic River Locations						Carmans River HH (Control)		NYSDEC AWQS (a)	Typical MDL	
	HY		HM-S		HQ		T	D			
	T	D	T	D	T	D	T	D			
<i>Total (T) or Dissolved (D)</i>											
<i>No. of samples</i>	2	2	1	1	NS	NS	2	2			
<b>Ag (I)</b> Silver (µg/L)	<i>min.</i>	< 2.0	< 2.0	--	--	--	--	< 2.0	< 2.0	0.1	2
	<i>max.</i>	< 2.0	< 2.0	< 2.0	< 2.0	--	--	< 2.0	< 2.0		
	<i>avg.</i>	< 2.0	< 2.0	--	--	--	--	< 2.0	< 2.0		
<b>Al (I)</b> Aluminum (µg/L)	<i>min.</i>	460	390	--	--	--	--	< 50.0	< 50.0	100	50
	<i>max.</i>	3300	1000	900	710	--	--	< 50.0	< 50.0		
	<i>avg.</i>	1880	695	--	--	--	--	< 50.0	< 50.0		
<b>As (D)</b> Arsenic (µg/L)	<i>min.</i>	< 5.0	< 5.0	--	--	--	--	< 5.0	< 5.0	150	5
	<i>max.</i>	< 5.0	< 5.0	< 5.0	< 5.0	--	--	< 5.0	< 5.0		
	<i>avg.</i>	< 5.0	< 5.0	--	--	--	--	< 5.0	< 5.0		
<b>Ba</b> Barium (µg/L)	<i>min.</i>	< 20.0	< 20.0	--	--	--	--	34.0	32.0	SNS	20
	<i>max.</i>	< 20.0	< 20.0	9.4	8.3	--	--	56.0	55.0		
	<i>avg.</i>	< 20.0	< 20.0	--	--	--	--	45.0	43.5		
<b>Be (AS)</b> Beryllium (µg/L)	<i>min.</i>	< 2.0	< 2.0	--	--	--	--	< 2.0	< 2.0	11	2
	<i>max.</i>	< 2.0	< 2.0	< 2.0	< 2.0	--	--	< 2.0	< 2.0		
	<i>avg.</i>	< 2.0	< 2.0	--	--	--	--	< 2.0	< 2.0		
<b>Cd (D)</b> Cadmium (µg/L)	<i>min.</i>	< 2.0	< 2.0	--	--	--	--	< 2.0	< 2.0	1.1	2
	<i>max.</i>	< 2.0	< 2.0	< 2.0	< 2.0	--	--	< 2.0	< 2.0		
	<i>avg.</i>	< 2.0	< 2.0	--	--	--	--	< 2.0	< 2.0		
<b>Co (AS)</b> Cobalt (µg/L)	<i>min.</i>	< 5.0	< 5.0	--	--	--	--	< 5.0	< 5.0	5	5
	<i>max.</i>	< 5.0	< 5.0	< 5.0	< 5.0	--	--	< 5.0	< 5.0		
	<i>avg.</i>	< 5.0	< 5.0	--	--	--	--	< 5.0	< 5.0		
<b>Cr (I)</b> Chromium (µg/L)	<i>min.</i>	< 10.0	< 10.0	--	--	--	--	< 10.0	< 10.0	34	10
	<i>max.</i>	< 10.0	< 10.0	< 10.0	< 10.0	--	--	< 10.0	< 10.0		
	<i>avg.</i>	< 10.0	< 10.0	--	--	--	--	< 10.0	< 10.0		
<b>Cu (D)</b> Copper (µg/L)	<i>min.</i>	< 10.0	< 10.0	--	--	--	--	< 10.0	< 10.0	4	10
	<i>max.</i>	< 10.0	< 10.0	< 10.0	< 10.0	--	--	< 10.0	< 10.0		
	<i>avg.</i>	< 10.0	< 10.0	--	--	--	--	< 10.0	< 10.0		
<b>Fe (AS)</b> Iron (mg/L)	<i>min.</i>	0.2	0.2	--	--	--	--	0.3	0.1	0.3	0.05
	<i>max.</i>	2.4	0.7	0.3	0.3	--	--	0.3	0.1		
	<i>avg.</i>	1.3	0.4	--	--	--	--	0.3	0.1		
<b>Hg (D)</b> Mercury (µg/L)	<i>min.</i>	< 0.2	< 0.2	--	--	--	--	< 0.2	< 0.2	0.2	0.2
	<i>max.</i>	< 0.2	< 0.2	< 0.2	< 0.2	--	--	< 0.2	< 0.2		
	<i>avg.</i>	< 0.2	< 0.2	--	--	--	--	< 0.2	< 0.2		
<b>Mn</b> Manganese (µg/L)	<i>min.</i>	31	9.7	--	--	--	--	40	40	SNS	4
	<i>max.</i>	34	32	R	R	--	--	180	170		
	<i>avg.</i>	32.5	20.9	--	--	--	--	110	105		
<b>Na</b> Sodium (mg/L)	<i>min.</i>	7.6	7.7	--	--	--	--	28	28	SNS	0.25
	<i>max.</i>	18	19	3.1	2.9	--	--	28	29		
	<i>avg.</i>	12.8	13.4	--	--	--	--	28	28.5		

(continued on next page)

**Table 5-7: Metals Analytical Results for Surface Water Samples Collected Along the Peconic and Carmans Rivers (concluded).**

METAL		Peconic River Locations						Carmans River HH (Control)		NYSDEC AWQS (a)	Typical MDL
		HY		HM-S		HQ		T	D		
		T	D	T	D	T	D	T	D		
Total (T) or Dissolved (D)											
No. of samples		2	2	1	1	NS	NS	2	2		
<b>Ni (D)</b> Nickel (µg/L)	min.	< 10.0	< 10.0	--	--	--	--	< 10.0	< 10.0	23	10
	max.	< 10.0	< 10.0	< 10.0	< 10.0	--	--	< 10.0	< 10.0		
	avg.	< 10.0	< 10.0	--	--	--	--	< 10.0	< 10.0		
<b>Pb (D)</b> Lead (µg/L)	min.	< 3.0	< 3.0	--	--	--	--	< 3.0	< 3.0	0.1	3
	max.	7.1	< 3.0	< 3.0	< 3.0	--	--	< 3.0	< 3.0		
	avg.	4.4	< 3.0	--	--	--	--	< 3.0	< 3.0		
<b>Sb</b> Antimony (µg/L)	min.	< 5.0	< 5.0	--	--	--	--	< 5.0	< 5.0	SNS	5
	max.	< 5.0	< 5.0	< 5.0	< 5.0	--	--	< 5.0	< 5.0		
	avg.	< 5.0	< 5.0	--	--	--	--	< 5.0	< 5.0		
<b>Se (D)</b> Selenium (µg/L)	min.	< 5.0	< 5.0	--	--	--	--	< 5.0	< 5.0	4.6	5
	max.	< 5.0	< 5.0	< 5.0	< 5.0	--	--	< 5.0	< 5.0		
	avg.	< 5.0	< 5.0	--	--	--	--	< 5.0	< 5.0		
<b>Tl (AS)</b> Thallium (µg/L)	min.	< 5.0	< 5.0	--	--	--	--	< 5.0	< 5.0	8	5
	max.	< 5.0	< 5.0	< 5.0	< 5.0	--	--	< 5.0	< 5.0		
	avg.	< 5.0	< 5.0	--	--	--	--	< 5.0	< 5.0		
<b>V (AS)</b> Vanadium (µg/L)	min.	< 7.0	< 7.0	--	--	--	--	< 7.0	< 7.0	14	7
	max.	< 7.0	< 7.0	< 7.0	< 7.0	--	--	< 7.0	< 7.0		
	avg.	< 7.0	< 7.0	--	--	--	--	< 7.0	< 7.0		
<b>Zn (D)</b> Zinc (µg/L)	min.	< 20.0	< 20.0	--	--	--	--	< 20.0	< 20.0	37	20
	max.	31	< 20.0	13	10	--	--	< 20.0	< 20.0		
	avg.	20.3	< 20.0	--	--	--	--	< 20.0	< 20.0		

## Notes:

See Figure 5-1 sampling station locations.

AWQS = Ambient Water Quality Standards

SNS = effluent standard not specified for these elements in Class C surface waters

(a) NYS AWQS for Class C surface waters

R = value rejected based on analytical lab qualifiers

NS - sample not collected due to dry conditions

disulfide at 0.36 µg/L, just above the MDL, at HM-S on the Peconic River and is likely from decay of organic matter located in the wetlands upstream. No VOCs were found in any samples collected from the Carmans River in 2021.

Water quality parameters measured in the three Peconic River locations and the Carmans River control location (HH) show that pH, temperature, conductivity, and dissolved oxygen levels were all within applicable NYS standards.

Ambient water quality standards (AWQS) for metallic elements are based on their solubility state. Certain metals are only biologically available

to aquatic organisms if they are in a dissolved or ionic state, whereas other metals are toxic in any form (i.e., dissolved and particulate combined). In 2021, the BNL monitoring program continued to assess water samples for both the dissolved and particulate form. Dissolved concentrations were determined by filtering the samples prior to acid preservation and analysis. Examination of the total (i.e., particulate form) metals data showed that aluminum, iron, and lead were present in concentrations at some locations that exceeded NYS AWQS. Aluminum was detected at concentrations exceeding the NYS AWQS at



## CHAPTER 5: WATER QUALITY

locations HY and HM-S on the Peconic River for both filtered and unfiltered samples. Iron was detected throughout the Peconic and Carmans River systems at concentrations that were at or slightly exceeding the NYS AWQS in both the filtered and unfiltered fractions; iron and aluminum are found in high concentrations in native Long Island soil and, for iron, at high levels in groundwater. Lead at concentrations greater than the NYS AWQS was found in samples collected at station HY on the Peconic River. Filtration of the samples reduced

concentrations for some metals, but not all, suggesting that suspended sediment was responsible for some metals in the samples.

### REFERENCES AND BIBLIOGRAPHY

- BNL. 2020. Standards Based Management System Subject Area: Liquid Effluents. Brookhaven National Laboratory, Upton, NY. March 2020.
- NYCRR Part 703.6. Title 6. 2019 Surface Water and Groundwater Quality Standards and Groundwater Effluent Limitations. New York State Department of Environmental Conservation. Albany, NY.

# Natural and Cultural Resources

---

The Brookhaven National Laboratory (BNL) Natural Resource Management Program is designed to protect and manage flora and fauna and the ecosystems in which they exist. The Laboratory's natural resource management strategy is based on understanding the site's resources and maintaining compliance with applicable regulations.

The goals of the program include protecting and monitoring the ecosystems, conducting research, and communicating with personnel and the public on ecological issues. BNL focuses on protecting both Federal and New York State threatened and endangered species on site, as well as continuing the Laboratory's leadership role within the greater Long Island Central Pine Barrens ecosystem. Monitoring to determine whether current or historical activities are affecting natural resources is also part of the program. In 2021, deer, vegetation, and soil sampling results were consistent with previous years' results.

The overriding goal of the Cultural Resource Management Program is to ensure that proper stewardship of BNL historic resources is established and maintained. Additional goals of the program include maintaining compliance with various historic preservation and archeological laws and regulations and ensuring the availability of identified resources for research and interpretation. In 2021, 19 buildings were confirmed by the New York State Historic Preservation Office to be eligible for listing on the National Register of Historic Places. The Cultural Resource program, working with the BNL Graphic Arts team, was able to digitize 1,448 videotapes to digital format for readily available use by the Lab and historians.

---

## 6.1 NATURAL RESOURCE MANAGEMENT PROGRAM

The Natural Resource Management Program at BNL promotes stewardship of the natural resources found at the Laboratory and integrates natural resource management and protection with BNL's scientific mission. The Natural Resource Management Plan (NRMP) describes the program strategy, elements, and planned activities for managing the various natural resources found on site. The NRMP is updated every five years, with the most recent update completed in 2021 (BNL 2021).

### 6.1.1 Identification and Mapping

An understanding of an environmental baseline is the foundation of natural resource management planning. BNL uses digital global positioning systems (GPS) and geographic information systems (GIS) to clearly relate various

"layers" of geographic information (e.g., vegetation types, soil condition, habitat, forest health, etc.). This is done to gain insight into interrelationships between the biotic systems and physical conditions at the Laboratory.

Mapping associated with tracking impacts from the operation of the Long Island Solar Farm (LISF) at BNL continues to use GPS and GIS as tools to analyze changes to wildlife populations and vegetation. In 2020, the Lab secured a contract with an aerial imaging service that provides high-definition images that are updated three times each year. This service allows tracking of visually evident changes in vegetation, hydro-period, and infrastructure. The service includes aerial imagery dating back to 2014.

A wide variety of vegetation, birds, reptiles, amphibians, and mammals inhabit the BNL site. Through implementation of the NRMP, endangered and threatened species, as well as

**Table 6-1. Federal and New York State Threatened & Endangered Species, Species of Special Concern, & Species of Greatest Conservation Need.**

Federal and New York State Threatened & Endangered Species, Species of Special Concern, & Species of Greatest Conservation Need			
Common Name	Scientific Name	State Status	BNL Status
<b>Insects</b>			
Comet damer	<i>Anax longipes</i>	SGCN	Confirmed
Frosted elfin	<i>Callophrys iris</i>	T	Likely
New England bluet	<i>Enallagma laterale</i>	SGCN	Likely
Little bluet	<i>Enallagma minusculum</i>	T	Likely
Scarlet bluet	<i>Enallagma pictum</i>	T	Likely
Pine Barrens bluet	<i>Enallagma recurvatum</i>	T	Confirmed
Mottled duskywing	<i>Erynnis martialis</i>	SC	Likely
Persius duskywing	<i>Erynnis persius persius</i>	E	Likely
Pine barrens zanclognatha	<i>Zanclognatha martha</i>	SGCN	Confirmed
Black-bordered lemon moth	<i>Marimatha nigrofimbria</i>	SGCN	Confirmed
<b>Fish</b>			
Banded sunfish	<i>Enneacanthus obesus</i>	T	Confirmed
Swamp darter	<i>Etheostoma fusiforme</i>	T	Confirmed
<b>Amphibians</b>			
Marbled salamander	<i>Ambystoma opacum</i>	SC	Confirmed
Eastern tiger salamander	<i>Ambystoma tigrinum tigrinum</i>	E	Confirmed
Fowler's toad	<i>Bufo fowleri</i>	SGCN	Confirmed
Four-toed salamander	<i>Hemidactylum scutatum</i>	SGCN	Confirmed
Eastern spadefoot toad	<i>Scaphiopus holbrookii</i>	SC	Confirmed
<b>Reptiles</b>			
Worm snake	<i>Carphophis amoenus</i>	SC	Confirmed
Snapping turtle	<i>Chelydra serpentina</i>	SGCN	Confirmed
Spotted turtle	<i>Clemmys guttata</i>	SC	Confirmed
Northern black racer	<i>Coluber constrictor</i>	SGCN	Confirmed
Eastern hognose snake	<i>Heterodon platyrhinos</i>	SC	Confirmed
Stinkpot turtle	<i>Sternotherus odoratus</i>	SGCN	Confirmed
Eastern box turtle	<i>Terrapene carolina</i>	SC	Confirmed
Eastern ribbon snake	<i>Thamnophis sauritus</i>	SGCN	Confirmed
<b>Birds (nesting, transient, or potentially present)</b>			
Cooper's hawk	<i>Accipiter cooperii</i>	SC	Confirmed
Sharp-shinned hawk	<i>Accipiter striatus</i>	SC	Confirmed
Grasshopper sparrow	<i>Ammodramus savannarum</i>	SC	Confirmed
Great egret	<i>Ardea alba</i>	SGCN	Confirmed
Whip-poor-will	<i>Caprimulgus vociferus</i>	SC	Confirmed
Northern harrier	<i>Circus cyaneus</i>	T	Confirmed
Black-billed cuckoo	<i>Coccyzus erythrophthalmus</i>	SGCN	Confirmed
Northern bobwhite	<i>Colinus virginianus</i>	SGCN	Confirmed
Prairie warbler	<i>Setophaga discolor</i>	SGCN	Confirmed
Horned lark	<i>Eremophila alpestris</i>	SC	Confirmed
Perigrine Falcon	<i>Falco peregrinus</i>	E	Confirmed
Bald Eagle	<i>Haliaeetus leucocephalus</i>	T	Confirmed
Wood thrush	<i>Hylocichla mustelina</i>	SGCN	Confirmed
Red-headed woodpecker	<i>Melanerpes erythrocephalus</i>	SC	Confirmed
Osprey	<i>Pandion haliaetus</i>	SC	Confirmed
Scarlet tanager	<i>Piranga olivacea</i>	SGCN	Confirmed
Glossy ibis	<i>Plegadis falcinellus</i>	SGCN	Confirmed
Brown thrasher	<i>Toxostoma rufum</i>	SGCN	Confirmed
Blue-winged warbler	<i>Vermivora pinus</i>	SGCN	Confirmed

continued on next page

species of special concern, have been identified as having been resident at BNL during the past 30 years or are expected to be present on site (see Table 6-1). New York State endangered animal species confirmed as currently inhabiting Laboratory property include the eastern tiger salamander (*Ambystoma t. tigrinum*) and the peregrine falcon (*Falco peregrinus*).

Endangered plants that have been confirmed on the BNL site include Engelmann spikerush (*Eleocharis engelmannii*), Ipecac spurge (*Euphorbia ipecacuanhae*), dwarf huckleberry (*Gaylussacia bigeloviana*), and whorled loosestrife (*Lysimachia quadrifolia*). Five other New York State endangered species have been identified at BNL in the past or are possibly present including: Persius duskywing (*Erynnis p. persius*), crested fringed orchid (*Plantathera cristata*), prostrate knotweed (*Polygonum aviculare ssp. buxiforme*), bracken fern (*Pteridium aquilinum var. pseudo-caudatum*), and possum haw (*Viburnum nudum var. nudum*).

Eight threatened species in New York State have been positively identified on site and three other species are considered likely to be present. Threatened species include: two fish (banded sunfish [*Enneacanthus obesus*] and swamp darter [*Etheostoma fusiforme*]); three plants (stiff-leaved goldenrod [*Oligoneuron rigida*], stargrass [*Aletris farinosa*], and eastern showy aster [*Eurybia spectabilis*]); the northern harrier (*Circus cyaneus*) is periodically seen in the fall; and the bald eagle (*Haliaeetus leucocephalus*) is routinely seen visiting the site. Insects listed as threatened include the Pine Barrens bluet (*Enallagma recurvatum*),

**Table 6-1. Federal and New York State Threatened & Endangered Species, Species of Special Concern, & Species of Greatest Conservation Need (concluded).**

Federal and New York State Threatened & Endangered Species, Species of Special Concern, & Species of Greatest Conservation Need			
Common Name	Scientific Name	State Status	BNL Status
<b>Mammals</b>			
Northern long-eared bat	<i>Myotis septentrionalis</i>	FT	Confirmed
<b>Plants</b>			
Small-flowered false foxglove	<i>Agalinis paupercula</i>	R	Confirmed
Stargrass	<i>Aletris farinosa</i>	T	Confirmed
Butterfly weed	<i>Asclepias tuberosa ssp. interior</i>	V	Confirmed
Spotted wintergreen	<i>Chimaphila maculata</i>	V	Confirmed
Flowering dogwood	<i>Cornus florida</i>	V	Confirmed
Pink lady's slipper	<i>Cypripedium acaule</i>	V	Confirmed
Ground pine	<i>Dendrolycopodium obscurum</i>	V	Confirmed
Round-leaved sundew	<i>Drosera rotundifolia var. rotundifolia</i>	V	Confirmed
Marginal wood fern	<i>Dryopteris marginalis</i>	V	Confirmed
Engelman spikerush	<i>Eleocharis engelmannii</i>	E	Confirmed
Ipecac spurge	<i>Euphorbia ipecacuanhae</i>	E	Confirmed
Eastern showy aster	<i>Eurybia spectabilis</i>	T	Confirmed
Dwarf huckleberry	<i>Gaylussacia bigeloviana</i>	E	Confirmed
Winterberry	<i>Ilex verticillata</i>	V	Confirmed
Sheep laurel	<i>Kalmia angustifolia</i>	V	Confirmed
Narrow-leaved bush clover	<i>Lespedeza angustifolia</i>	R	Confirmed
Wild lupine	<i>Lupinus perennis</i>	R	Confirmed
Whorled loosestrife	<i>Lysimachia quadrifolia</i>	E	Confirmed
Bayberry	<i>Myrica pensylvanica</i>	V	Confirmed
Stiff-leaved goldenrod	<i>Oligoneuron rigida</i>	T	Confirmed
Cinnamon fern	<i>Osmunda cinnamomea</i>	V	Confirmed
Clayton's fern	<i>Osmunda claytoniana</i>	V	Confirmed
Royal fern	<i>Osmunda regalis</i>	V	Confirmed
Crested fringed orchid	<i>Plantathera cristata</i>	E	Likely
Green fringed orchid	<i>Platanthera lacera</i>	V	Confirmed
Prostate knotweed	<i>Polygonum aviculare ssp. buxiforme</i>	E	Possible
Bracken fern	<i>Pteridium alquilinum var. pseudocaudatum</i>	E	Possible
Swamp azalea	<i>Rhododendron viscosum</i>	V	Confirmed
Long-beaked bald-rush	<i>Rhynchospora scirpoides</i>	R	Confirmed
New York fern	<i>Thelypteris novaboracensis</i>	V	Confirmed
Marsh fern	<i>Thelypteris palustris var. pubescens</i>	V	Confirmed
Possum haw	<i>Viburnum nudum var. nudum</i>	E	Possible
Virginia chain-fern	<i>Woodwardia virginica</i>	V	Confirmed
Notes: information based on 6 NYCRR Part 182, 6 NYCRR Part 193, and BNL survey data. E = endangered FE=federally endangered FT = federally threatened	R = rate SC = species of special concern SGCN = species of greatest conservation need T = threatened V = exploitably vulnerable		

a damselfly which was confirmed at one of the many coastal plain ponds located on site. Two other damselflies, the little bluet (*Enallagma minisculum*) and the scarlet bluet (*Enallagma pictum*), are likely to be present at one or more of the ponds on site. The frosted elfin (*Callophrys irus*), a butterfly, has been historically present on site due to its preferred habitat and host plant, wild lupine (*Lupinus perennis*).

A number of other species that are listed as rare, of special concern, or exploitably vulnerable by New York State either currently inhabit the site, visit during migration, or have been identified historically. BNL has one federally threatened species, the northern long-eared bat (*Myotis septentrionalis*), that is found within the forests of the Lab.

### 6.1.2 Habitat Protection and Enhancement

BNL has administrative processes in place to protect on-site habitats and natural resources.

Activities to eliminate or minimize negative effects on endangered, threatened, or sensitive species are either incorporated into Laboratory procedures or into specific program or project plans. Human access to critical habitats, when necessary, is limited, and habitats are enhanced to improve survival or increase populations. Routine activities, such as road maintenance, are not performed until the planned activities have been evaluated and determined to be unlikely to affect habitat.

#### 6.1.2.1 Salamander Protection Efforts

Many safeguards are in place to

protect eastern tiger salamander breeding areas. BNL staff must review any project planned near eastern tiger salamander habitats and every effort is made to minimize impacts. A map of the breeding areas is reviewed when new projects are proposed. The current map incorporates buffer areas around tiger salamander habitats of 1,000 feet based on guidance from the New York State Department of Environmental Conservation (NYSDEC). Other efforts to protect this state-endangered species include determining when adult salamanders are migrating toward breeding locations, when metamorphosis has been completed, and when juveniles are migrating after metamorphosis.

Water quality testing is conducted as part of the routine monitoring of recharge basins, as discussed in Chapter 5. In cooperation with NYSDEC, habitat surveys have been routinely conducted since 1999. Biologists conducting egg mass and larval surveys have confirmed that 26 on-site ponds are used by eastern tiger salamanders. In 2021, a limited number of surveys were completed as COVID-19 restrictions were still in place. A total of six ponds were visited with documentation of 88 egg masses.

#### 6.1.2.2 *Banded Sunfish*

Banded sunfish protection efforts include observing whether adequate water is present within areas currently identified as sunfish habitat, ensuring that vegetation in their habitat is not disturbed, and evaluating all activities taking place in ponds and the Peconic River on site for potential impacts on these habitats. Drought conditions that lasted from 2015 through early 2017 likely resulted in the extirpation of the banded sunfish from the BNL site. The single known habitat held water throughout 2018 and 2019 could likely sustain sunfish. However, a short survey by NYSDEC personnel in 2019 did not find sunfish in the pond. No additional effort has been made regionally with regard to the banded sunfish in 2021.

#### 6.1.2.3 *Migratory Birds*

A total of 216 species of birds have been identified at BNL since 1948; at least 85 species are known to nest on site. Some of these nesting

birds have shown declines in their populations nationwide over the past 30 years. The Laboratory conducts routine monitoring of songbirds along seven permanent bird survey routes in various habitats on site.

In 2021, monthly surveys were conducted starting at the end of April and extending through the end of August. These surveys identified 67 bird species, compared to the 65 species identified in 2020 and 73 species in 2019. A total of 135 bird species have been identified in surveys in the past 22 years; 59 of these species were present in each of the past 22 years. Variations in the number and species identified during each survey may reflect the time of observation, variations in weather patterns between years, and possible changes in the environment.

The three most diverse transects on site are by the LISF, the Peconic River, and the eastern edge of the BNL property. The transects passing through the various forest types on site (e.g., white pine, pine-oak forest, and red maple-mesic heath forest) showed a less diverse bird community. Bird survey data are stored in an electronic database for future reference and study. Little data on the effects of a large, utility-scale solar array such as the LISF are present within scientific literature. To assess the effects of the LISF on local bird populations, the collection of migratory bird data in both the Biology Field and Solar Farm transects is important. The LISF vegetation and the way it is managed may play a key role as habitat for migratory birds.

The eastern bluebird (*Sialia sialis*) has been identified as a declining species of migratory birds in North America. This is due to loss of habitat and nest site competition from European starlings (*Sturnus vulgaris*) and house sparrows (*Passer domesticus*). BNL's NRMP includes habitat enhancement for the eastern bluebird.

Since 2000, the Laboratory has installed more than 60 nest boxes around open grassland areas on site to enhance their population. The LISF created nearly 200 acres of suitable habitat for the eastern blue bird. Forty boxes were installed around the northern-most portions of the LISF and are routinely used by bluebirds, house wrens, and tree swallows. Bluebirds have also benefited from natural nesting habitat



resulting from the 2012 wildland fire that resulted in significant tree mortality. Bluebirds have been documented annually within the burned area since 2019.

In 2019, a pair of peregrine falcons (*Falco peregrinus*) successfully nested on the stack of the former High Flux Beam Reactor (HFBR). The pair took over a common raven's nest and successfully raised two chicks. While the nesting is a great success, the nesting was discouraged in 2020 to allow the demolition of the stack which is required under the Record of Decision for the Decontamination and Dismantlement of the HFBR. The falcons had been seen in various locations on site in 2020 but nesting was not documented. In 2021, the falcons took over an osprey's nest located on a cellular tower on the western portion of the Lab. The pair successfully raised three chicks.

Migratory birds occasionally cause safety and health concerns, particularly Canada geese (*Branta canadensis*) and several species of migratory birds that occasionally nest on buildings or in construction areas on site. To control the goose population, the Laboratory manages nesting through egg oiling under an annual permit from the U.S. Fish & Wildlife Service. In 2020, the nest management program was suspended due to restrictions associated with COVID-19. Prior to the start of nesting, the population was estimated at 105 birds; nesting success resulted in a population of approximately 150 birds by August 2020. Nest management in 2021 was overall successful with only a dozen or so goslings produced. The number of resident geese was lowered to approximately 40 birds through the permanent removal of 82 geese from the flock by USDA Wildlife Services.

#### 6.1.2.4 Bald Eagle

The bald eagle (*Haliaeetus leucocephalus*) has been increasing in population locally on Long Island with more than a dozen known nest sites on the island. Bald eagles were sighted numerous times in the area of the Sewage Treatment Plant (STP) throughout 2021. As the eagle population increases on Long Island, the potential for them to nest on the BNL site will increase as well.

#### 6.1.2.5 Northern Long-eared Bat

As discussed in Section 6.1.1, the northern long-eared bat was added to the list of federally threatened species in 2015. BNL began planning for the eventual listing and put in place actions to minimize the likelihood of impacting this species. The two most likely activities that could impact this bat on the BNL site are building demolitions and prescribed fires. Inspections for the presence of bats may be conducted through either acoustic or visual surveys prior to demolition. Regardless of the outcome of acoustic monitoring (when conducted), a final internal inspection of the building(s) is conducted approximately 24 hours prior to demolition to verify the absence of bats.

For growing season prescribed fires, acoustic monitoring may be done within the burn unit to determine if there is bat activity. If positive results occur, surveys of the entire burn unit are completed to identify potential roost trees and appropriate protections are put into place to ensure that bats are not impacted by fire. In 2021, two buildings were demolished, and there was no impact to bats. No prescribed fires were conducted in 2021.

To ensure continued understanding of the presence and use of forested habitats by bats, four nights of mist netting were conducted during July and August. No northern long-eared bats were captured. However, acoustic monitoring detected at least one occurrence. Other bats captured included big brown bats (*Eptesicus fuscus*) and eastern red bat (*Lasiurus borealis*). The need to continue bat monitoring will likely increase in the future as the northern long-eared bat is currently under review for being listed as endangered under the Endangered Species Act.

### 6.1.3 Population Management

In addition to controlling resident Canada goose populations described above, the Laboratory also monitors or manages other populations, including species of interest, to ensure that they are sustained and to control invasive species.

#### 6.1.3.1 Wild Turkey

The forested areas of BNL provide ideal nesting and foraging habitat for wild turkey

(*Meleagris gallapavo*). In 2021, the on-site population continued to range between 350 and 500 birds due to successful nesting. Each year, NYSDEC manages a hunting period during the week of Thanksgiving, and a youth-only hunt in May for several areas across Long Island, which typically results in approximately 100 birds taken. The NYSDEC is considering expanding turkey hunting to a month-long season in 2022.

### 6.1.3.2 White-Tailed Deer

BNL consistently updates information on the resident population of white-tailed deer (*Odocoileus virginianus*). As there are no natural predators on site and hunting is not permitted at the Laboratory, there are no significant pressures on the population to migrate beyond their typical home range of approximately one square mile. Normally, a population density of ten to 30 deer per square mile is considered an optimum sustainable level for a given area. This would equate to approximately 80 to 250 deer inhabiting the BNL property under optimal circumstances. This was the approximate density in 1966, when BNL reported an estimate of 267 deer on site (Dwyer 1966). The Laboratory has been conducting routine population surveys of the white-tailed deer since 2000.

Deer overpopulation can affect animal and human health (e.g., animal starvation, Lyme disease from deer ticks, and collision injuries to both humans and animals), species diversity (e.g., songbird species reduction due to selective grazing and destruction of habitat by deer), and property damage (e.g., collision damage to autos and browsing damage to ornamental

plantings). Deer-related collisions on site continued to be low presumably due to deer harvest as well as fewer employees onsite due to the COVID-19 pandemic.

High deer populations are a regional problem, and the Laboratory is just one area on Long Island with such an issue. Multiple east end towns are now managing deer populations either through culls (aka deer harvests), hunting, or sterilization programs. Under BNL's permit for deployment of the 4-Poster™ tick management system issued by NYSDEC, the Laboratory is required to implement a deer management program. BNL has been implementing deer management since 2015 and conducting herd reductions annually since 2018. The herd was estimated at 425 at the end of 2020 and a harvest was planned for two separate weekends between February and April 2021.

The first herd reduction was conducted in February 2021 with the second round in mid-March, both resulting in a total of 81 animals being taken. Several nights had bad weather and/or icy conditions that prevented safe operations. The removal of 81 deer effectively brought the population to approximately 344 animals which did not meet the reduction goals of getting below 250 deer. With reproduction at approximately 60 percent, the population at the end of 2021 was estimated at approximately 400 deer. Reproductive effort indicated potential population growth to roughly 500 deer but the presence of Epizootic Hemorrhagic Disease (EHD) on Long Island may have resulted in the lower population. EHD is a viral disease transmitted by biting midges and the disease is usually fatal once symptoms emerge. At least a couple of documented deer deaths on the BNL site were likely the result of EHD. Efforts were underway in the fall of 2021 to plan for the next round of population management in 2022 with a later start to avoid weather and help ensure reduction goals can be achieved.

### 6.1.4 Compliance Assurance and Potential Impact Assessment

The National Environmental Policy Act (NEPA) review process at BNL ensures that environmental impacts of a proposed action or activity



4 poster™ tick management system

are adequately evaluated and addressed. The Laboratory uses NEPA reviews when identifying potential environmental impacts associated with site activities, especially projects that may result in physical alterations to the landscape and structures. As appropriate, stakeholders such as EPA, NYSDEC, Suffolk County Department of Health Services (SCDHS), BNL's Community Advisory Council (CAC), and the Brookhaven Executive Roundtable are involved in reviewing major projects that have the potential for significant environmental impacts. Formal NEPA reviews are coordinated with the State of New York.

In January 2020, the Department of Energy (DOE) announced the award for construction of the Electron-Ion Collider at BNL. This resulted in the development of an Environmental Evaluation and Notification Form that was submitted to the Brookhaven Site Office and a determination was issued that an Environmental Assessment (EA) would be necessary. The EA was developed and presented to the CAC in September 2020 and was further developed for submission to New York State by year's end. The EA was finalized and a Finding of No Significant Impact was issued by DOE on March 26, 2021.

## 6.2 UPTON ECOLOGICAL AND RESEARCH RESERVE

The Upton Ecological and Research Reserve (Upton Reserve) consists of 530 acres located on the eastern boundary of the BNL site. The reserve has been designated as an area for the protection of sensitive habitats and a place where researchers can study local ecosystems. The Upton Reserve is home to a wide variety of flora and fauna. It contains wetlands and is largely within the core preservation area of the Long Island Central Pine Barrens. Based on information from a 1994-1995 biological survey of the Laboratory, experts believe the reserve is home to more than 200 plant species and at least 162 species of mammals, birds, fish, reptiles, and amphibians (LMS 1995).

The Upton Reserve is managed by BNL which also coordinates research projects that occur within the reserve and the larger Pine Barrens. After successfully establishing a Memorandum of Understanding (MOU) with the State

University of New York's School of Environmental Science and Forestry (SUNY-ESF), efforts to revisit the 2005-2006 forest health monitoring program resulted in the completion of monitoring during summer 2020 (see education programs below). The MOU with SUNY-ESF allows for greater levels of research within the Central Pine Barrens and the Upton Reserve. Little research was conducted in 2021 due to continued limitations for on-site internships due to COVID-19.

## 6.3 MONITORING FLORA AND FAUNA

The Laboratory routinely conducts surveillance monitoring of flora and fauna to determine the effects of past and present activities on the site. Because soil contaminated with a radioactive isotope of cesium (Cs-137) was used in some BNL landscaping projects in the past, traces of Cs-137 attributable to past practices and worldwide fallout from above-ground nuclear bomb testing can be found in deer and other animals and plants. At the cellular level, Cs-137 takes the place of potassium (K), an essential nutrient. Most tables in this chapter listing Cs-137 also list analytical results for potassium-40 (K-40), a naturally occurring radioisotope of potassium that is commonly found in flora and fauna. Studies indicate that Cs-137 out-competes potassium when potassium salts are limited in the environment, which is typical on Long Island. Including K-40 in tables allows for a comparison with Cs-137 levels and is used, in part, to determine the accuracy of analytical results. The results of the annual sampling conducted under the flora and fauna monitoring program are described in the following sections.

### 6.3.1 Deer Sampling

White-tailed deer in New York State are typically large, with males weighing on average approximately 150 pounds; females typically weigh approximately 100 pounds. However, white-tailed deer on Long Island tend to be much smaller, weighing an average of 80 pounds. The meat available for consumption from local deer ranges from 20 to 40 pounds per animal. Samples of meat and liver are taken from each deer, when possible, and are analyzed for Cs-137. Data are reported on a wet-weight basis, as that

is the form most likely used for consumption.

Since 1996, BNL has routinely collected deer samples from on- and off-site areas. While most off-site samples are the result of car/deer accidents near the Laboratory, samples from deer taken by hunters beyond BNL boundaries or samples from car/deer accidents greater than one mile from BNL have also been made available for analysis. In 1998, a statistical analysis suggested that 40 deer from off site and 25 deer from on site are needed to achieve a statistically sound data set. The number obtained each year has not met this preferred level because sample availability depends on accidents between vehicles and deer and people reporting dead deer. In 2021, a total of 19 deer were taken both on and off the BNL site. However, the meat sample from one of the onsite deer taken during the deer cull was contaminated during preparation at the analytical laboratory and had to be discarded resulting in 18 meat samples and 19 liver samples.

Figure 6-1 shows the location of all deer samples taken within a five-mile radius of the Laboratory between 2017 and 2021. Most of the off-site samples are concentrated along the William Floyd Parkway on the west boundary of BNL, whereas historically most on-site samples are collected near the Laboratory's main entrance gate and the developed portions of the site. The distribution of deer samples onsite is becoming more uniform across the site due to obtaining samples during annual deer population reduction efforts. Historically, samples tended to be from near the front gate due to collisions with cars entering or leaving the site.

Based on more than two decades of sampling, deer taken from more than one mile from BNL are used for comparison with populations on and near the Laboratory that could acquire Cs-137 from a BNL source. In 2021, 18 deer were obtained on site, of which 14 were sampled as part of deer reduction efforts, and only one deer was taken from offsite greater than a mile from BNL. As mentioned above, one meat sample from the deer reduction efforts had to be discarded, leaving 17 onsite samples for analysis. The low number of offsite deer was the result of an increased number of employees who normally report deer for sampling continued

to work from home due to COVID-19. The one offsite deer and four of the onsite deer were due to deer/vehicle collisions. The analytical results of deer sampling are shown in Table 6-2. The samples taken as part of deer population reductions serve a dual purpose to provide data for surveillance and to determine the safe release of meat for consumption. Every tenth deer taken was sampled for Cs-137 content in both meat and liver.

#### 6.3.1.1 *Cesium-137 in White-Tailed Deer*

Based on historic and current data, white-tailed deer sampled at or near the Laboratory contain higher concentrations of Cs-137 than deer from greater than one mile off site. This is most likely because the deer graze on vegetation growing in soil where elevated Cs-137 levels are known to exist. Cesium-137 in soil can be transferred to above-ground plant matter via root uptake, where it then becomes available to browsing and grazing animals or is consumed directly with soil while the animal is grazing.

Remediation of contaminated soil areas on site occurred under the Laboratory's Comprehensive Environmental Response, Compensation & Liability Act (CERCLA) program, with all major areas of contaminated soil being remediated by September 2005.

In 2021, Cs-137 concentrations in deer meat samples were obtained from 17 deer on site with a range of values from 0.07 pCi/g, wet weight, to 1.99 pCi/g, wet weight, and an arithmetic average of 0.41 pCi/g, wet weight, as shown in Table 6-2. The wet weight concentration is before a sample is dried for analysis and is the form most likely to be consumed. Dry weight concentrations are typically higher than wet weight values. The highest on-site sample in 2021 (1.99 pCi/g, wet weight) was roughly eight times the highest on-site sample reported in 2020 (0.24 pCi/g, wet weight) and six times lower than the highest level ever reported in 1996 (11.74 pCi/g, wet weight). Higher values in deer are usually seen during the fall months immediately after plants stop growing and uptake ceases. By January, cesium has usually been excreted.

Cs-137 concentrations in off-site deer meat samples are typically separated into two groups:



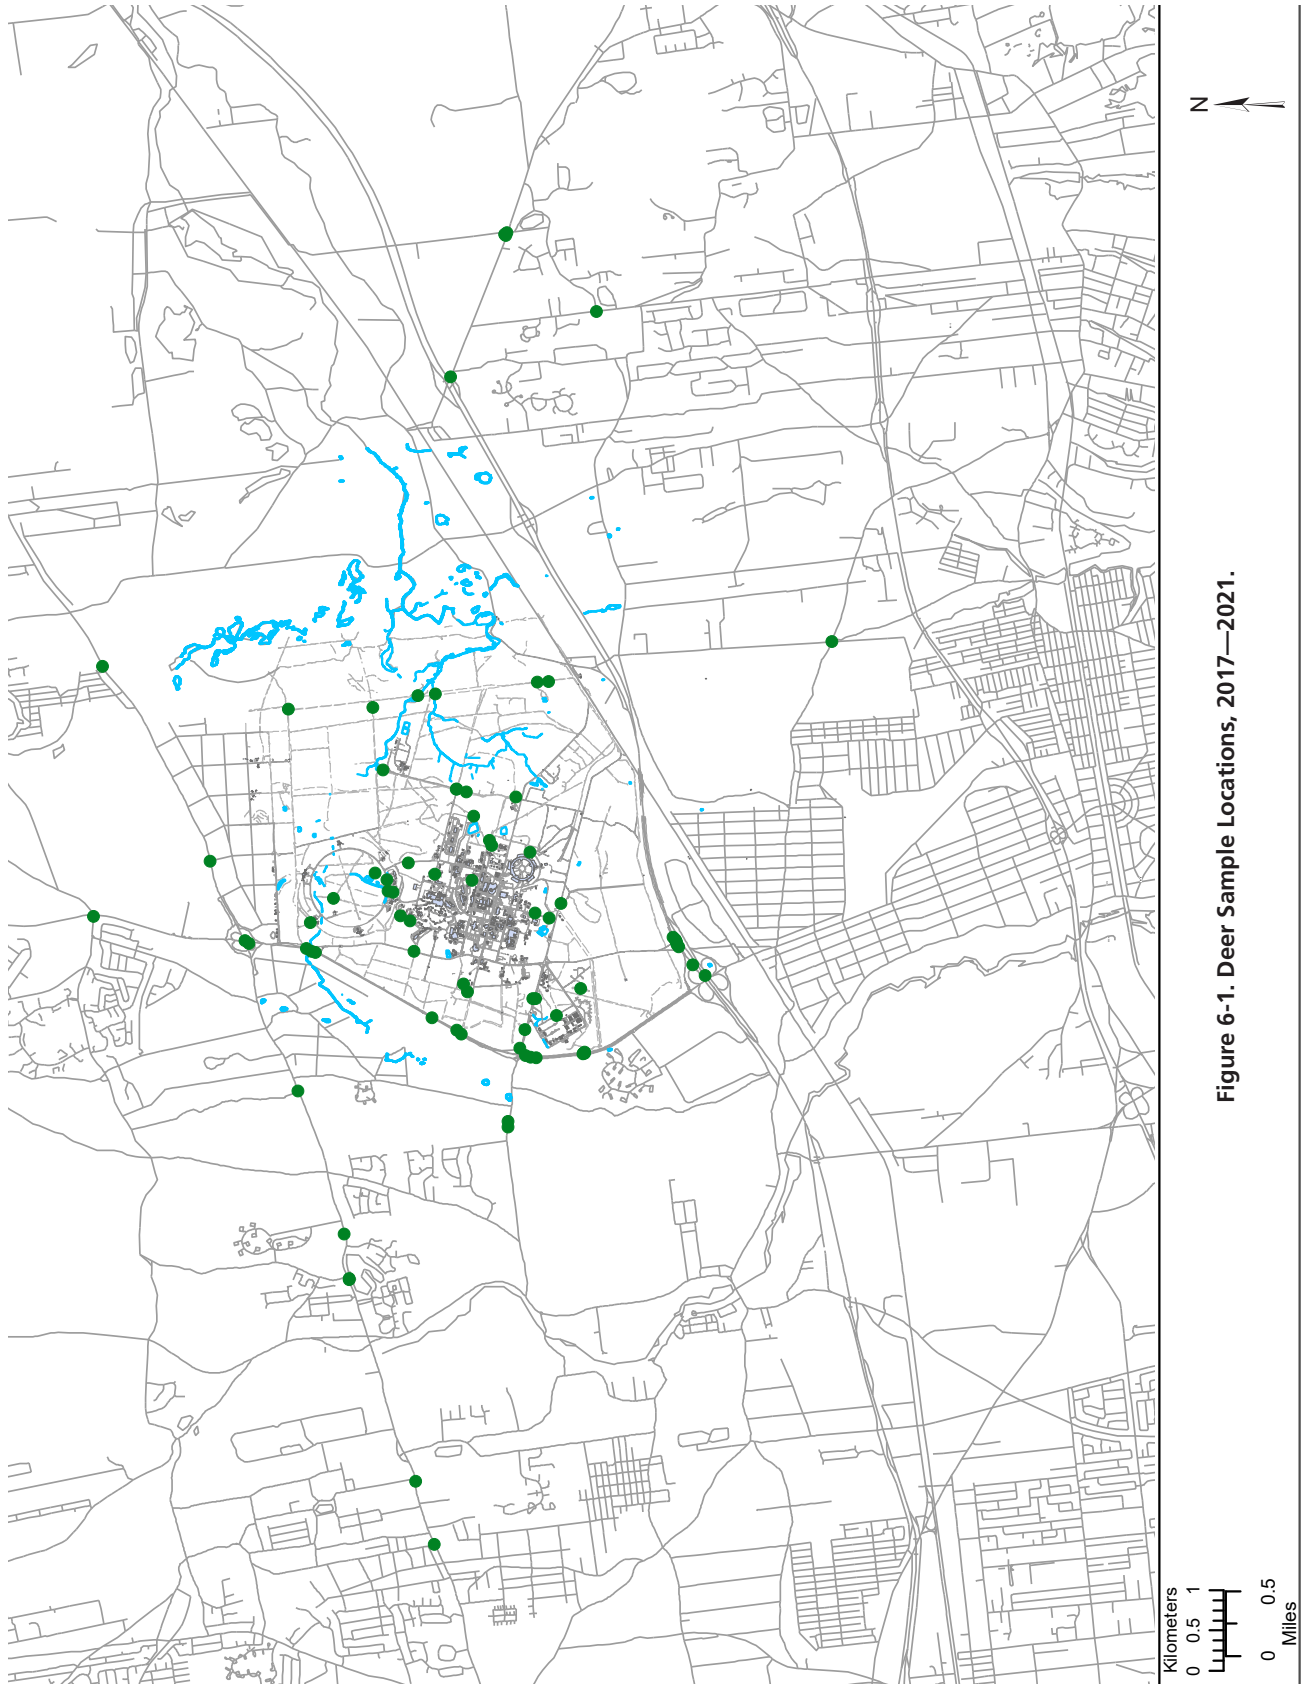


Figure 6-1. Deer Sample Locations, 2017—2021.



CHAPTER 6: NATURAL AND CULTURAL RESOURCES

Table 6-2. Radiological Analyses of Deer Tissue (2021).

Sample Location	Collection Date	Tissue	K-40 pCi/g (Wet Weight)	Cs-137 pCi/g (Wet Weight)
<b>BNL</b>				
Cull Sample 1 East Firebreak at HM-s	2/20/21	flesh	3.21±0.62	0.63±0.07
		liver	2.39±0.19	0.12±0.01
Cull Sample 2 HT-e Area	2/20/21	flesh	3.24±0.57	0.20±0.04
		liver	2.00±0.17	0.04±0.01
Cull Sample 3 former Bldg 51 Area	2/20/21	flesh	2.83±0.65	0.26±0.05
		liver	2.03±0.19	0.05±0.01
Cull Sample 4 First St. South of East Fifth Ave.	2/21/21	flesh	1.38±0.82	0.36±0.07
		liver	2.13±0.19	0.09±0.01
Cull Sample 5 East Firebreak at HM-n	2/21/21	flesh	3.16±0.73	0.07±0.04
		liver	2.31±0.18	0.01±0.01
Cull Sample 6 East of Bldg. 924*	2/22/21	liver	2.20±0.16	0.06±0.01
Cull Sample 7 West Meteorology Field	3/12/21	flesh	3.14±0.56	0.13±0.03
		liver	2.19±0.16	0.03±0.01
Cull Sample 8 RHIC Center	3/13/21	flesh	3.17±0.48	0.23±0.04
		liver	2.00±0.14	0.05±0.01
Cull Sample 9 East Firebreak North of South Boundary 1	3/13/21	flesh	3.26±0.47	0.33±0.04
		liver	2.30±0.31	0.07±0.02
Cull Sample 10 Stump Dump	3/13/21	flesh	2.43±0.45	0.17±0.03
		liver	2.10±0.21	0.05±0.01
Cull Sample 11 Front Gate Area	3/13/21	flesh	2.91±0.67	0.20±0.05
		liver	1.93±0.15	0.05±0.01
Cull Sample 12 East Princeton and Fawn Path	3/13/21	flesh	2.81±0.48	0.13±0.03
		liver	2.14±0.15	0.04±0.01
Cull Sample 14 East Firebreak North of South Boundary 2	3/14/21	flesh	3.03±0.88	0.44±0.07
		liver	2.02±0.26	0.10±0.02
Cull Sample 13 east of Basin HO	3/14/21	flesh	2.83±0.53	0.26±0.04
		liver	2.18±0.17	0.06±0.01
Rochester St. East of Bldg. 479	10/5/21	flesh	2.92±0.24	1.23±0.04
		liver	2.52±0.19	0.36±0.02
East Firebreak northeast corner	11/18/21	flesh	3.03±0.14	1.99±0.03
		liver	2.73±0.17	0.51±0.02
Princeton Ave. east of main gate deer 1	12/15/21	flesh	2.31±0.39	0.16±0.03
		liver	3.42±0.52	0.50±0.05
Princeton Ave. east of main gate deer 2	12/17/21	flesh	3.13±0.39	0.19±0.03
		liver	2.19±0.30	0.03±0.01
<b>&gt; 1 Mile from BNL</b>				
Route 25, 1 mile east of East Bartlett Rd	3/4/21	flesh	2.91±0.16	0.06±0.01
		liver	2.82±0.22	0.01±0.01
<b>Flesh Averages</b>				
All Samples (18)			2.87±0.55	0.39±0.04
BNL Average (17)			2.87±0.56	0.41±0.04
> 1 Mile Average (1)			2.91±0.16	0.06±0.01
Cull Average (13)			1.88±0.62	0.26±0.05
<b>Liver Averages</b>				
All Samples (19)			2.29±0.23	0.12±0.02
BNL Average (18)			2.27±0.23	0.12±0.02
> 1 Mile Average (1)			2.82±0.22	0.01±0.01
Cull Average (14)			2.14±0.19	0.06±0.01

Notes: All values are shown with a 95% confidence interval

K-40 Occurs naturally in the environment and is presented as a comparison to Cs-137

All averages are the arithmetic average with confidence limits using a 2 sigma (95%) propagated error.

\* Cull Sample 6 flesh sample was damaged during lab preparation and could not be analyzed.

samples taken within one mile of BNL (no samples in 2021) and samples taken farther away (one sample in 2021), as shown in Table 6-2. Concentrations in meat samples taken within one mile were not available due to the lack of samples. Because deer on site may routinely travel up to one mile off site, the arithmetic average for deer taken on site and within one mile of the Laboratory is also calculated; for 2021, this could not be calculated due to the lack of near offsite deer samples. The single deer sampled from greater than one mile from BNL had a Cs-137 concentration of 0.06 pCi/g, wet weight. Figure 6-2 compares the average values of Cs-137 concentrations in meat samples collected in 2021 from onsite, greater than one mile, and deer taken from culling.

Figure 6-3 presents the ten-year trend of on-site and near off-site Cs-137 averages in deer meat. The 2021 average is approximately seven times the 2020 value of 0.06 pCi/g, wet weight but is lower than the ten-year average. The higher averages shown are reflective of a significant number of samples taken in the fall when Cs-137 levels are typically higher. However, these sample results continue to indicate the effectiveness of cleanup actions across the Laboratory, with the trend being downward from 2012 to 2021 and the ten-year average being 0.49 pCi/g.

The effectiveness of the BNL soil cleanup program and the reduction of Cs-137 in deer meat was evaluated by Rispoli, et al. (2014). The average Cs-137 content was shown to be statistically lower than before cleanup. Samples taken at distances greater than one mile from the BNL site were shown to remain consistent before and after cleanup, while the on-site and near off-site values were shown to decline. In 2017, while preparing for monitoring associated with the reduction of the deer population, the ten-year average for on-site deer samples was calculated to be 1.0 pCi/g, wet weight, and this value was used to establish an administrative release criterion for deer meat made available for donation. When possible, liver samples are taken concurrently with meat samples. The liver generally accumulates Cs-137 at a lower rate than muscle tissue. The typically lower values in liver allow


the results to be used as a validity check for meat values (i.e., if liver values are higher than meat values, results can be considered questionable and should be confirmed).

In liver samples collected on site in 2021, Cs-137 concentrations ranged from 0.01 pCi/g to 0.51 pCi/g, wet weight, with an average of 0.12 pCi/g, wet weight. The single liver sample from deer taken greater than one mile from BNL had a Cs-137 concentration of 0.01 pCi/g, wet weight. The potential radiological dose resulting from deer meat consumption is discussed in Chapter 8.


The New York State Department of Health (NYSDOH) has formally considered the potential public health risks associated with elevated Cs-137 levels in on-site deer and determined that neither hunting restrictions nor formal health advisories are warranted (NYSDOH 1999).

As mentioned above, BNL has established an administrative release criterion of 1.0 pCi/g, wet weight, for meat from deer removed from the Laboratory and donated for consumption. A total of 81 deer were taken during population reductions in 2021. Meat samples were obtained from every tenth deer during the first weekend and every fifth deer during the second weekend. Samples were sent for analysis and are included in Table 6-2. The results ranged from 0.07 pCi/g, wet weight, to 0.44 pCi/g, wet weight, with the arithmetic average being 0.26 pCi/g, wet weight. Since all samples were well below the 1.0 pCi/g, wet weight administrative limit, all 2,204 pounds of meat were donated to Island Harvest Food Pantry.

With respect to the health of on-site deer based on their exposure to radionuclides, the International Atomic Energy Agency (IAEA) has concluded that chronic dose rates of 100 millirad per day to even the most radiosensitive species in terrestrial ecosystems are unlikely to cause detrimental effects in animal populations (IAEA 1992). A deer containing a uniform distribution of Cs-137 within muscle tissue at the highest levels observed to date (11.74 pCi/g, wet weight, reported in 1996) would carry a total amount of approximately 0.2  $\mu$ Ci. That animal would receive an absorbed dose of approximately 3 millirad per day, which is only three percent of the IAEA threshold. The deer observed and sampled on

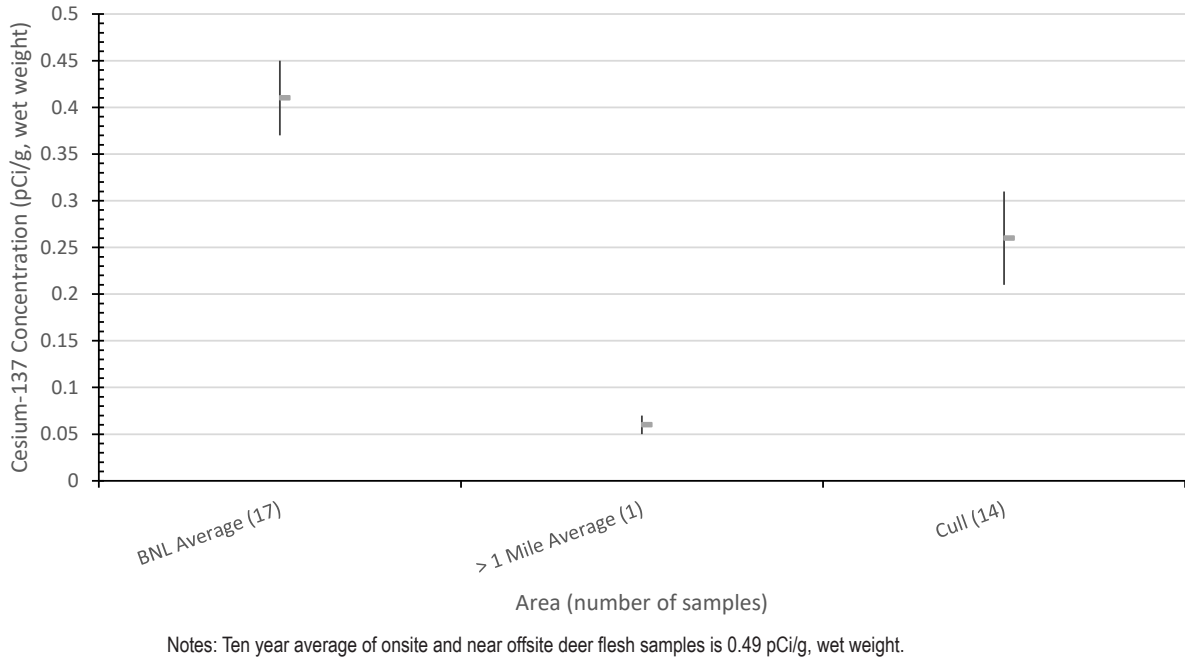

**Figure 6-2. Comparison of Cs-137 values in deer flesh for onsite, offsite within 1 mile, onsite and near offsite, and offsite greater than 1 mile from the Laboratory.**

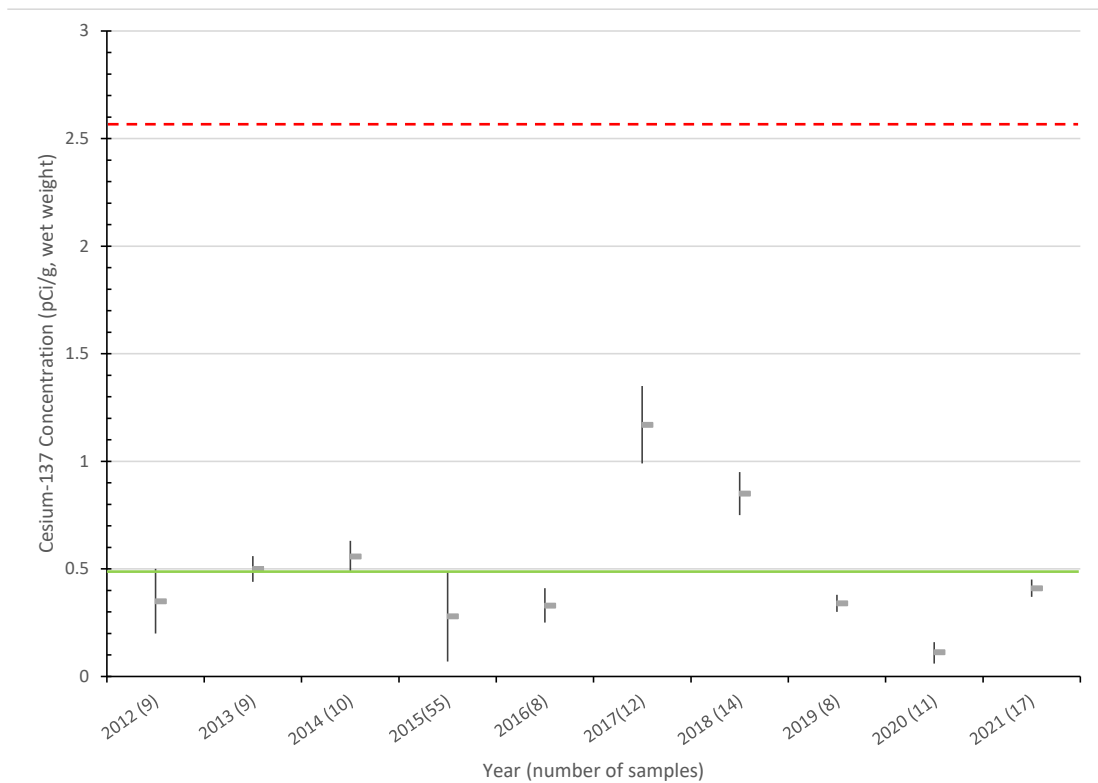

**Figure 6-3. Ten year trend in Cs-137 in deer flesh for samples taken at BNL and within 1 mile of the Laboratory. Ten-year average is 0.49 pCi/g (solid line). The average before environmental cleanup was 2.57 pCi/g (dashed line).**

site appear to have no health effects from the level of Cs-137 found in their tissues.

### 6.3.2 Other Animals Sampled

When other animals, such as wild turkey or Canada geese, are found dead along the roads of BNL and the immediate vicinity due to road mortality, they are tested for Cs-137. A single Canada goose was hit by a car in 2021 and a sample was sent for analysis with an estimated result of 0.01 pCi/g, wet weight reported by the Laboratory.

### 6.3.3 Fish Sampling

BNL maintains an ongoing program for collecting and analyzing fish from the Peconic River and surrounding freshwater bodies. Monitoring of the river has been conducted under the environmental surveillance program and the CERCLA post-cleanup program. Surveillance monitoring had occurred during even-numbered years and post-cleanup monitoring occurred in odd-numbered years. However, with the discontinuance of discharges from the STP to the Peconic River in September 2014 and current lack of flow off site, the objectives for the fish monitoring program have changed to reflect the current intermittent presence of water in the on-site portions of the river. Fish are now only sampled under the surveillance program when there is enough water to support a sufficient population of fish that can be sampled without harm to their population and that are of sufficient size for analysis.

Based upon the 2016 CERCLA Five-Year Review of the effectiveness of the environmental cleanup and the final supplemental cleanup of a small area within the river during 2017, the Laboratory has discontinued fish monitoring under the CERCLA program. However, when conditions allow, fish sampling will be conducted under the surveillance program for radionuclide, mercury, and PCB content. Analysis for radionuclides supports calculation for a dose to biota and dose to the maximally exposed off site individual. Due to lack of water and fish within the on-site portions of the Peconic River, no fish were sampled in 2021.

#### 6.3.3.1 Fish Population Assessment

The relative sizes of fish caught during annual sampling events are tracked and modifications to future sampling events are made, as necessary, to ensure long-term health of the on-site fish populations. Successful sampling of sufficiently large fish for analysis from 2008 through 2015, even with low water levels in the on-site portion of the Peconic River, indicated that fish populations could maintain themselves. However, the combination of discontinuing STP discharges to the Peconic River results in high variability in the presence of water and flow sufficient enough to reach offsite portions of the river. In 2019, water levels began to recede, resulting in water being retained only in deeper open water areas and levels continued to recede through 2021. There was no documented offsite flow in 2021.

For fish populations to survive and flourish, water levels must be substantial enough to allow migration of fish and maintain their presence for an extended period to replenish populations. As mentioned above, new criteria for the collection of fish samples have been developed. These criteria will guide the environmental monitoring approach for fish in the future. To determine if enough fish are present to support sampling, population assessments are conducted. In 2021, a population assessment was conducted at the end of May and resulted in the capture of nine chain pickerel. The largest fish caught had a length of 80 mm, or a little over three inches. The average length of fish was 58 mm. Since there were no fish of significant size, no samples were taken.

### 6.3.4 Vegetation Sampling

#### 6.3.4.1 Grassy Plants and Soil

During 2021, grassy vegetation samples were collected from 11 locations around the Laboratory (Figure 6-4) and a control location at the NYSDEC hunter check station in Ridge, New York. All samples were analyzed for Cs-137 (see Table 6-3). All vegetation samples were non-detect for Cs-137. Soil samples had Cs-137 levels ranging from non-detect to 0.27 pCi/g, dry weight. All values were consistent with historic monitoring and knowledge of cleanup areas.

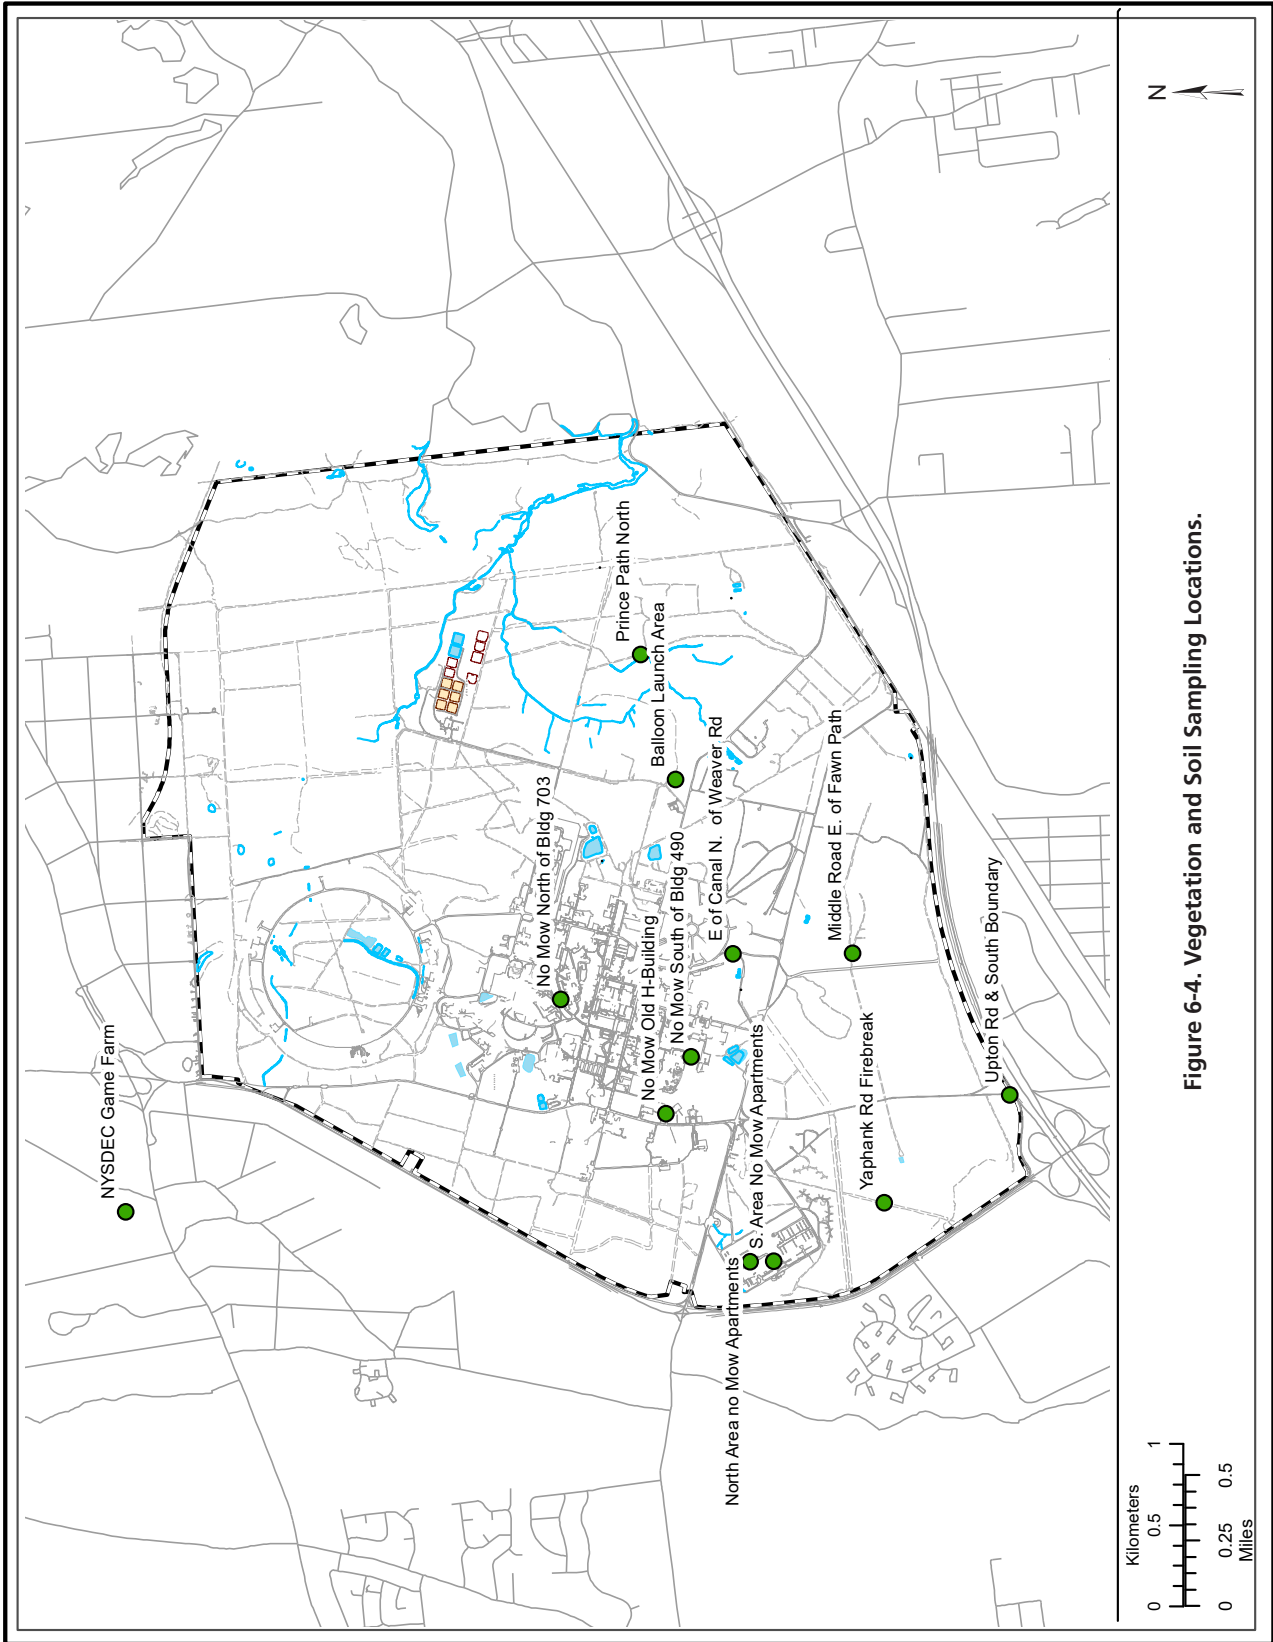


Figure 6-4. Vegetation and Soil Sampling Locations.



**Table 6-3. Radiological analysis of grassy vegetation and associated soils.**

Location/Matrix	K-40 pCi/g±95% C.I.	Cs-137 pCi/g±95% C.I.
<b>North Area No Mow Apartments</b>		
Vegetation	5.17±0.68	ND
Soil	6.31±1.11	0.27±0.07
<b>South Area No Mow Apartments</b>		
Vegetation	5.02±0.98	ND
Soil	6.00±0.90	0.20±0.05
<b>No Mow South of Bldg. 490</b>		
Vegetation	6.74±0.99	ND
Soil	5.77±0.81	0.22±0.06
<b>E. of Canal N. of Weaver Rd.</b>		
Vegetation	5.68±0.85	ND
Soil*	5.46±1.01	0.14±0.06
<b>No Mow North of Bldg. 703</b>		
Vegetation	4.08±0.71	ND
Soil*	4.54±0.81	0.17±0.06
<b>Upton Rd. &amp; South Boundary</b>		
Vegetation	4.74±0.85	ND
Soil	6.83±1.11	0.20±0.08
<b>Yaphank Rd. Firebreak</b>		
Vegetation	6.29±1.00	ND
Soil*	7.06±0.90	0.08±0.05
<b>Prince Path North</b>		
Vegetation	4.25±0.86	ND
Soil*	5.19±0.85	0.08±0.06
<b>Balloon Launch Area</b>		
Vegetation	6.04±0.93	ND
Soil*	5.53±0.83	0.07±0.04
<b>No Mow Old H-Building</b>		
Vegetation	5.17±0.90	ND
Soil	5.62±0.81	0.20±0.06
<b>Middle Road E. of Fawn Path</b>		
Vegetation	5.22±1.10	ND
Soil	5.75±0.77	ND
<b>NYSDEC Game Farm (Control)</b>		
Vegetation	4.27±0.83	ND
Soil	5.14±0.87	0.27±0.07

Notes:  
 All values are shown with a 95% confidence interval.  
 Radiological values for soils are on a 'dry weight' basis.  
 K-40 occurs naturally in the environment and is presented as a comparison to Cs-137.  
 Cs-137 = cesium-137  
 K-40 = potassium-40  
 ND = not detected  
 \* = estimated value for Cs-137 based on laboratory qualifiers.

Monitoring results for grassy vegetation and soils were utilized for the annual dose to biota analysis reported in Chapter 8.

## 6.4 PRECIPITATION MONITORING

### 6.4.1 Mercury Monitoring of Precipitation

During 2021, precipitation samples were collected quarterly at air monitoring Stations P4 and S5 (Figure 4-2 for station locations). The samples were analyzed for total mercury (Table 6-4) using low-level mercury analysis.

Mercury concentrations in precipitation have been measured at BNL since 2007. Analysis of mercury in precipitation is conducted to document mercury deposition that is attributable to off-site sources. This information has been used as a comparison to Peconic River monitoring data and aids in understanding the distribution of mercury within the Peconic River watershed.

Mercury was detected in all the precipitation samples collected at both sampling stations. Mercury ranged from 2.52 ng/L at station P4 in January 2021 to 15.3 ng/L at station S5 in July 2021. The 15.3 ng/L concentration is three times lower than the highest value of 45.1 ng/L, recorded in 2017.

**Table 6-4. Precipitation Monitoring (Mercury).**

Location/Period	Mercury ng/L
<b>P4</b>	
1/19/21	2.52
4/12/21	5.79
7/7/21	10.6
10/18/21	7.92
<b>S5</b>	
1/19/21	2.81
4/12/21	6.92
7/7/21	15.3
10/18/21	7.41

Notes:  
 Method detection limit for mercury is 0.2 ng/L.  
 P4 = precipitation sampler near BNL Apartment area.  
 S5 = precipitation sampler near BNL Sewage Treatment Plant.

### 6.5 EDUCATIONAL PROGRAMS

BNL sponsors a variety of educational and outreach activities involving natural resources. These programs are designed to help participants understand the ecosystem, foster an interest in science, and provide a meaningful experience for interns in preparation for further studies or a career. Wildlife programs are conducted at the Laboratory in collaboration with the DOE, local agencies, colleges, and high schools. Ecological research is also conducted on site to routinely update the natural resource inventory records, gain a better understanding of the ecosystem, and guide management planning.

In 2021, due to COVID-19 restrictions, all internships were required to be conducted virtually. Due to the nature of the natural resources program, the Environmental Protection Division hosted one intern during the summer of 2021 who worked on statistical analysis of data associated with the 4-Poster™ project for tick management.

In a normal year, BNL participates in, coordinates, or hosts activities that support ecological education on Long Island. In 2021, due to restrictions associated with COVID-19, the following programs were cancelled:

- Long Island Natural History Conference
- Participation in the Pine Barrens Discovery Day
- Open Space Stewardship Program (which involves 2,500 students from 30 schools)
- NY Wildfire & Incident Management Academy

However, the Day in the Life of a River program did run from September 24 to November 5, 2021. The Day in the Life of a River Program is a place-based educational experience where students and teachers collaborate with environmental professionals to collect scientific information capturing a snapshot of the health of the Long Island rivers and creeks. The Day in the Life of a River is a collaboration between the Central Pine Barrens Commission, the NYSDEC, and BNL.

Due to the ongoing COVID-19 pandemic, the number of participants was not at pre-pandemic levels. For 2021, 1,392 students and 54 teachers from 30 Long Island schools participated in the program. The Day in the Life program was

supported by 69 experts from the US Geological Survey, Town of Brookhaven, Trout Unlimited, New York State Parks, Cornell Cooperative Extension, and Seatuck Environmental Association, among others.

### 6.6 CULTURAL RESOURCE ACTIVITIES

The BNL Cultural Resource Management (CRM) Program ensures that the Laboratory fully complies with numerous cultural resource regulations. The Cultural Resource Management Plan for Brookhaven National Laboratory (BNL 2013) guides the management for all the Laboratory's historical resources. BNL's cultural resources include buildings and structures, World War I (WWI) earthwork features, the Camp Upton Historical Collection, scientific equipment, photo/audio/video archives, and institutional records. As various cultural resources are identified, plans for their long-term stewardship are developed and implemented. Achieving these goals will ensure that the contributions BNL and the site have made to local and national history and culture are documented and available for interpretation.

In 2019, the Laboratory contracted with Hartgen Archeological Associates to conduct historical architectural reviews of buildings that had recently reached 50 years of age. The contract continued into early 2020 with three reports covering the Alternating Gradient Synchrotron (AGS) complex, Medical Complex, and several other buildings. The reports provided determinations of eligibility for the Medical Complex (Buildings 490 and 491), Buildings 820, 820A, 820B, 830, 902, and the WWII water tower, and several buildings combined within the AGS complex, including Buildings 901, 901A, 911, 912, 913, 913A through E, and 930. Several buildings were determined to not meet criteria for consideration. The Lab submitted reports to the New York State Historic Preservation Office (NYSHPO) in 2021 and received concurrence of its findings. With COVID-19 restrictions lessened, the NYSHPO visited the Lab in October 2021 to gain a better understanding of the Lab's historic resources, see two resources that are scheduled for demolition, and discuss the potential for a Programmatic Agreement that would streamline the Section 106 process. In 2021, the Cultural



*Brookhaven Medical Research Reactor.*



*World War II water tower*

Resource program worked with Graphic Arts to establish a project to catalog and evaluate all of the video tapes held by Graphic Arts. The videos were evaluated, prioritized, and contract established with Puddle Drop Media to digitize those videos of highest historic value. The contract resulted in a total of 1,448 videos being digitized. The digitized videos are now more accessible for use in video production and historic study.

**REFERENCES AND BIBLIOGRAPHY**

BNL. 2013. Cultural Resource Management Plan for Brookhaven National Laboratory. BNL-100708-2013. Brookhaven National Laboratory, Upton, NY. May 2013.

BNL. 2016a. Natural Resource Management Plan for Brookhaven National Laboratory. BNL-112669-2016. Brookhaven National Laboratory, Upton, NY.

BNL, 2021. Five-Year Review Report for Brookhaven National Laboratory Superfund Site, April 2021.

Dwyer, Norval. 1966. Brookhaven National Laboratory. Long Island Forum (reprint), West Islip, NY.

IAEA. 1992. Effects of Ionizing Radiation on Plants and Animals at Levels Implied by Current Radiation Protection Standards. Technical Report Series No. 332. International Atomic Energy Agency, Vienna.

LMS. 1995. Phase II Sitewide Biological Inventory Report, Final. Lawler, Matusky & Skelly Engineers. Pearl River, NY.

NYSDOH. 1999. Deer Meat Contaminated with Cesium-137 at Brookhaven National Laboratory. Bureau of Environmental Radiation Protection, New York State Department of Health, Albany, NY.

Rispoli, Fred J., Green Timothy, Fasano, Thomas A., Shah, Vishal. 2014. The effect of environmental remediation on the cesium-137 levels in white-tailed deer. Environmental Science and Pollution Research Oct. 2014, 21(19):11598-11602.

# Groundwater Protection

---

Brookhaven National Laboratory (BNL) implements aggressive pollution prevention measures to protect groundwater resources and uses an extensive groundwater monitoring well network to verify that prevention and restoration activities are effective. During 2021, BNL collected groundwater samples from 580 permanent monitoring wells and 70 temporary wells. Seven groundwater remediation systems removed 58 pounds of volatile organic compounds (VOCs) and returned approximately one billion gallons of treated water to the Upper Glacial aquifer. Since the beginning of active groundwater remediation in December 1996, the treatment systems have removed 7,758 pounds of VOCs by treating almost 30 billion gallons of groundwater. Also, one groundwater treatment system removed approximately 0.3 millicurie of strontium-90 (Sr-90) while remediating approximately 14 million gallons of groundwater. Since 2003, BNL has removed approximately 34 millicuries of Sr-90 from the groundwater while remediating approximately 274 million gallons of groundwater. As a result of the successful operation of these treatment systems, significant reductions in contaminant concentrations have occurred in on- and off-site areas.

---

## 7.1 THE BNL GROUNDWATER PROTECTION MANAGEMENT PROGRAM

The primary goal of BNL's Groundwater Protection Program is to ensure that plans for groundwater protection, management, monitoring, and remediation are fully defined, integrated, and managed in a manner that is consistent with federal, state, and local regulations. The program helps to fulfill the environmental monitoring requirements outlined in various New York State operating permits, Department of Energy (DOE) Order 458.1, Radiation Protection of the Public and Environment, and DOE Order 436.1, Departmental Sustainability. This program also satisfies the monitoring and remediation requirements defined in Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) Records of Decision (RODs). The program consists of four interconnecting elements: 1) preventing pollution of the groundwater, 2) monitoring the effectiveness of engineered and administrative controls at operating facilities, 3) restoring the environment by cleaning up contaminated

soil and groundwater, and 4) communicating with stakeholders on groundwater protection issues. The Laboratory is committed to protecting groundwater resources from further chemical and radionuclide releases and remediating existing contaminated groundwater.

### 7.1.1 Prevention

As part of BNL's Environmental Management System, the Laboratory has implemented several pollution prevention activities that are designed to protect groundwater resources (see Chapter 2). BNL has established a work control program that requires the assessment of all experiments and industrial operations to determine their potential impact on the environment. The program enables the Laboratory to integrate pollution prevention and waste minimization, resource conservation, and compliance into planning and decision making. Efforts have been implemented to achieve or maintain compliance with regulatory requirements and to implement best management practices designed to protect groundwater (see Chapter 3).



## CHAPTER 7: GROUNDWATER PROTECTION

Examples include upgrading underground storage tanks, closing cesspools, adding engineered controls (e.g., barriers to prevent rainwater infiltration that could move contaminants out of the soil and into groundwater), and administrative controls (e.g., reducing the toxicity and volume of chemicals in use or storage). BNL's comprehensive groundwater monitoring program is used to confirm that these controls are working.

### 7.1.2 Monitoring

The Laboratory's groundwater monitoring network is designed to evaluate the impacts of groundwater contamination from former and current operations and to track cleanup progress. Each year, BNL collects groundwater samples from an extensive network of on- and off-site monitoring wells. Results from groundwater monitoring are used to verify that protection and remediation efforts are working. Groundwater monitoring is focused on two general areas: 1) Facility Monitoring, designed to satisfy DOE and New York State monitoring requirements for active research and support facilities; and 2) CERCLA monitoring related to the Laboratory's obligations under the Federal Facilities Agreement (FFA). These monitoring programs are coordinated to ensure completeness and to prevent duplication of effort in the installation, monitoring, and decommissioning of wells. The monitoring program elements include data quality objectives; plans and procedures; sampling and analysis; quality assurance; data management; and the installation, maintenance, and decommissioning of wells. These elements are integrated to create a cost-effective monitoring system and to ensure that water quality data are available for review and interpretation in a timely manner.

### 7.1.3 Remediation

BNL was added to the National Priorities List in 1989. To help manage the restoration effort, 34 separate Areas of Concern are grouped into ten Operable Units (OUs). Remedial actions have been implemented for each OU, and the focus is currently on operating and maintaining cleanup systems. Contaminant sources (e.g., contaminated soil and underground storage tanks) have been removed or remediated to prevent further

contamination of groundwater. All remediation work is carried out under the FFA involving the Environmental Protection Agency (EPA), the New York State Department of Environmental Conservation (NYSDEC), and DOE.

### 7.1.4 Communication

BNL's Stakeholder & Community Relations Office works with the Groundwater Protection Program to ensure that the Laboratory communicates groundwater protection issues and cleanup progress with its stakeholders in a consistent, timely, and accurate manner. Several communication mechanisms are in place, such as press releases, web pages, mailings, public meetings, briefings, and roundtable discussions. Specific examples include routine meetings with the Community Advisory Council and the Brookhaven Executive Roundtable (see Chapter 2, Section 2.4.2). Quarterly and annual technical reports that summarize data, evaluations, and program indices are prepared. In addition, the Laboratory has developed a Groundwater Protection Contingency Plan (BNL 2018) that provides formal processes to promptly communicate off-normal or unusual monitoring results to BNL management, DOE, regulatory agencies, and other stakeholders, including the public and employees.

## 7.2 GROUNDWATER PROTECTION PERFORMANCE

BNL has made significant investments in environmental protection programs over the past 30 years and continues to make progress in achieving its goal of preventing new impacts to groundwater quality and remediating previously contaminated groundwater. The Laboratory will continue efforts to prevent new groundwater impacts and is vigilant in measuring and communicating its performance. During 2017, several Per- and Poly-fluoroalkyl Substances (PFAS) were detected in water samples collected from three BNL water supply wells. In response to these detections, in 2018 BNL conducted a search of available records to determine the source of the PFAS. As a result, BNL identified eight areas where firefighting foam had been used for firefighter training or fire suppression system maintenance from 1966 through 2008. Groundwater



characterization conducted in 2018 and 2019 confirmed the presence of PFAS in each of the eight areas. During 2021, BNL identified a ninth PFAS source area near dormitory Building 170, which had been used for firefighter training. In all nine foam release areas, perfluorooctane sulfonate (PFOS) and perfluorooctanoic acid (PFOA) concentrations were found to exceed the 10 ng/L drinking water standards that were adopted for these chemicals by New York State in August 2020. The highest PFAS concentrations in groundwater are associated with firefighter training that occurred at the former firehouse (in operation from 1947-1985), the current firehouse, and the Building 170 areas. At the former firehouse area, the maximum PFOS and PFOA concentrations detected to date in the groundwater were 5,210 ng/L and 1,400 ng/L, respectively. At the current firehouse area, the maximum PFOS and PFOA concentrations detected to date were 12,440 ng/L and 602 ng/L, respectively. And near the Building 170 source area, the maximum PFOS and PFOA concentrations detected were 8,470 ng/L and 66 ng/L, respectively. During 2021, BNL began the construction of two groundwater treatment systems that will be used to remediate these high concentration PFAS plumes. It is anticipated that construction of the treatment systems will be completed by Fall 2022. In addition to PFAS, BNL has been characterizing the extent of 1,4-dioxane contamination in groundwater. It was used as a chemical stabilizer for the solvent 1,1,1-trichloroethane (TCA). BNL has confirmed the presence of 1,4-dioxane in several on-site and off-site areas that have been impacted by TCA contamination, with a maximum concentration of 23.9 µg/L in a Western South Boundary area monitoring well. In August 2020, New York State adopted a drinking water standard for 1,4-dioxane of 1.0 µg/L.

### 7.3 GROUNDWATER MONITORING PROGRAMS

Elements of the groundwater monitoring program include installing permanent and temporary monitoring wells; planning and scheduling; developing and following quality assurance procedures; collecting and analyzing samples; verifying, validating, and interpreting data; and reporting.

Monitoring wells are used to evaluate BNL's progress in restoring groundwater quality, comply with regulatory permit requirements, monitor active research and support facilities, and assess the quality of groundwater that enters and exits the site.

The Laboratory monitors research and support facilities where there is a potential for environmental impact, as well as areas where past waste handling practices or accidental spills have already degraded groundwater quality. The groundwater beneath the site is classified by New York State as Class GA groundwater, which is defined as a source of potable water. Federal drinking water standards (DWS), New York State DWS, and New York State Ambient Water Quality Standards for Class GA groundwater are used as goals for groundwater protection and remediation. BNL evaluates the potential impact of radiological and non-radiological contamination by comparing analytical results to the regulatory standards. Contaminant concentrations that are below the standards are also compared to background values to evaluate the potential effects of facility operations. The detection of even low concentrations of facility-specific VOCs or radionuclides may provide important early indications of a contaminant release and allow for timely identification and remediation of the source.

BNL maintains an extensive network of groundwater monitoring wells that are located on- and off-site. Water levels are routinely measured in about 185 of the wells to assess variations in the direction and velocity of groundwater flow. Groundwater flow directions near the Laboratory are shown in Figure 7-1.

The Laboratory also routinely collects groundwater samples from over 600 wells to test for various contaminants that may be in the water (see SER Volume II, Groundwater Status Report, for details).

The following active BNL facilities have groundwater monitoring programs: Sewage Treatment Plant (STP), Waste Management Facility (WMF), Major Petroleum Facility (MPF), Alternating Gradient Synchrotron (AGS), Brookhaven Linac Isotope Producer (BLIP), Relativistic Heavy Ion Collider (RHIC), National Synchrotron Light Source II (NSLS-II), and several vehicle maintenance and petroleum storage facilities. Inactive and remediated facilities are also monitored, including the


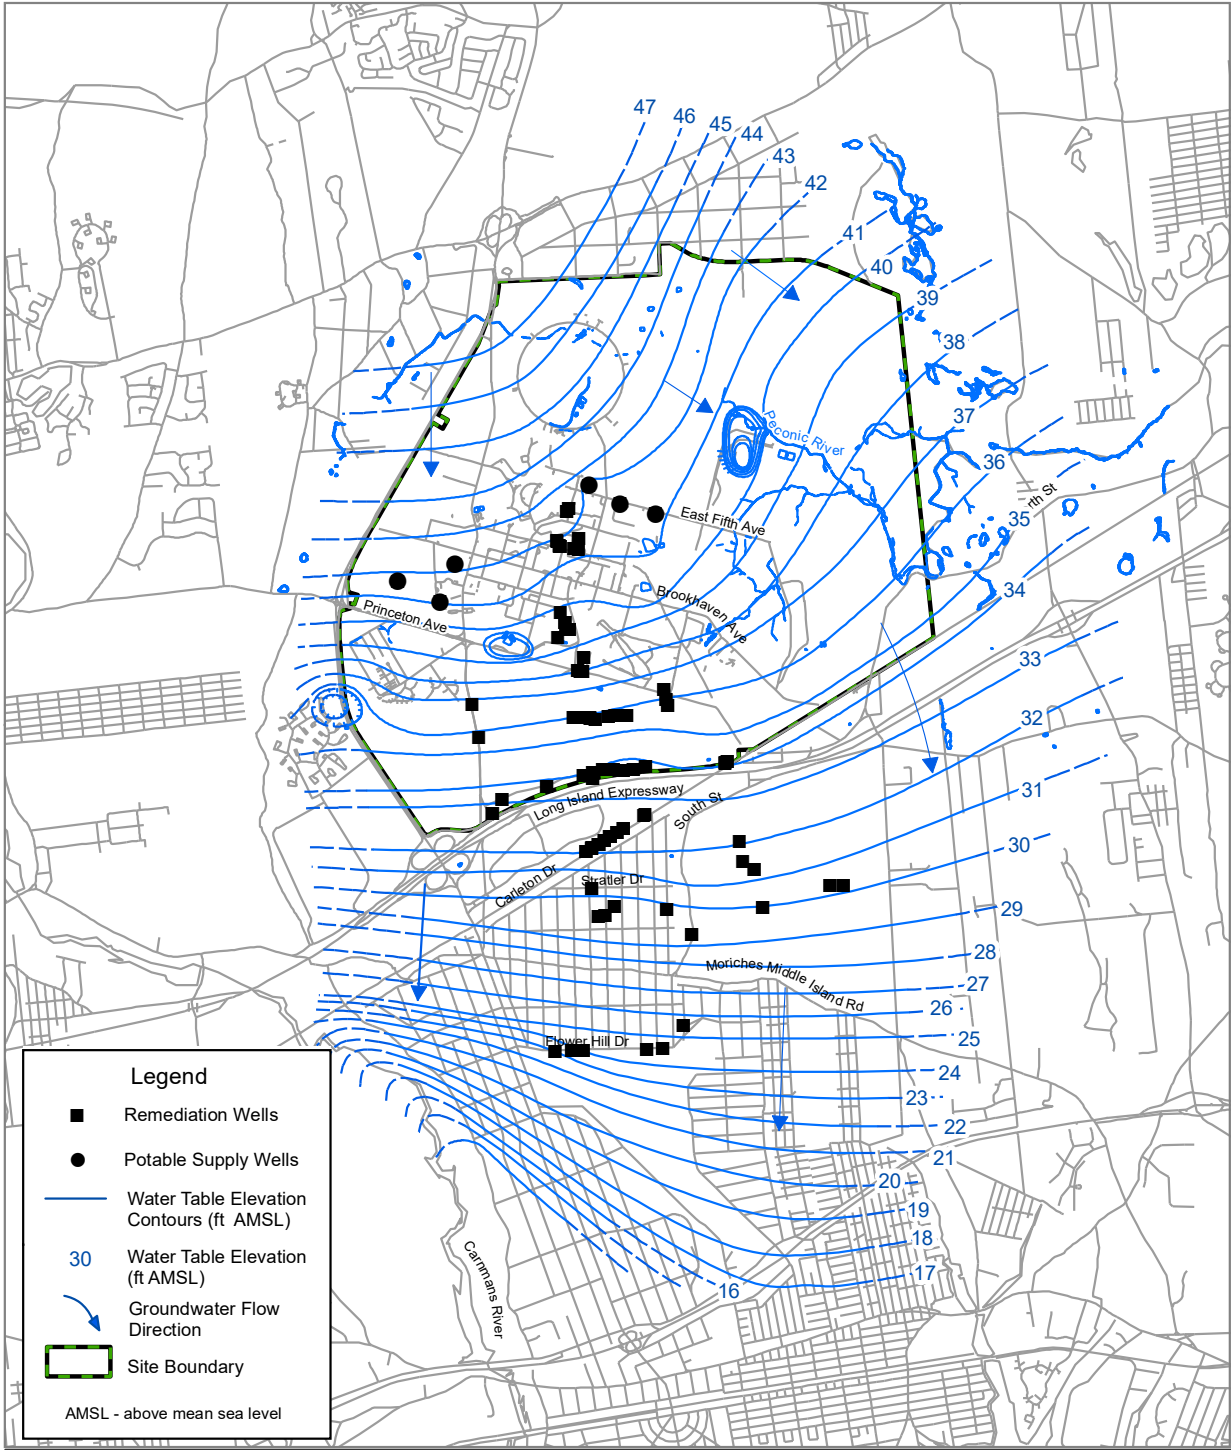


Figure 7-1. Groundwater Flow and Water Table Elevation (January 2021) with Supply and Remediation Wells Shown.




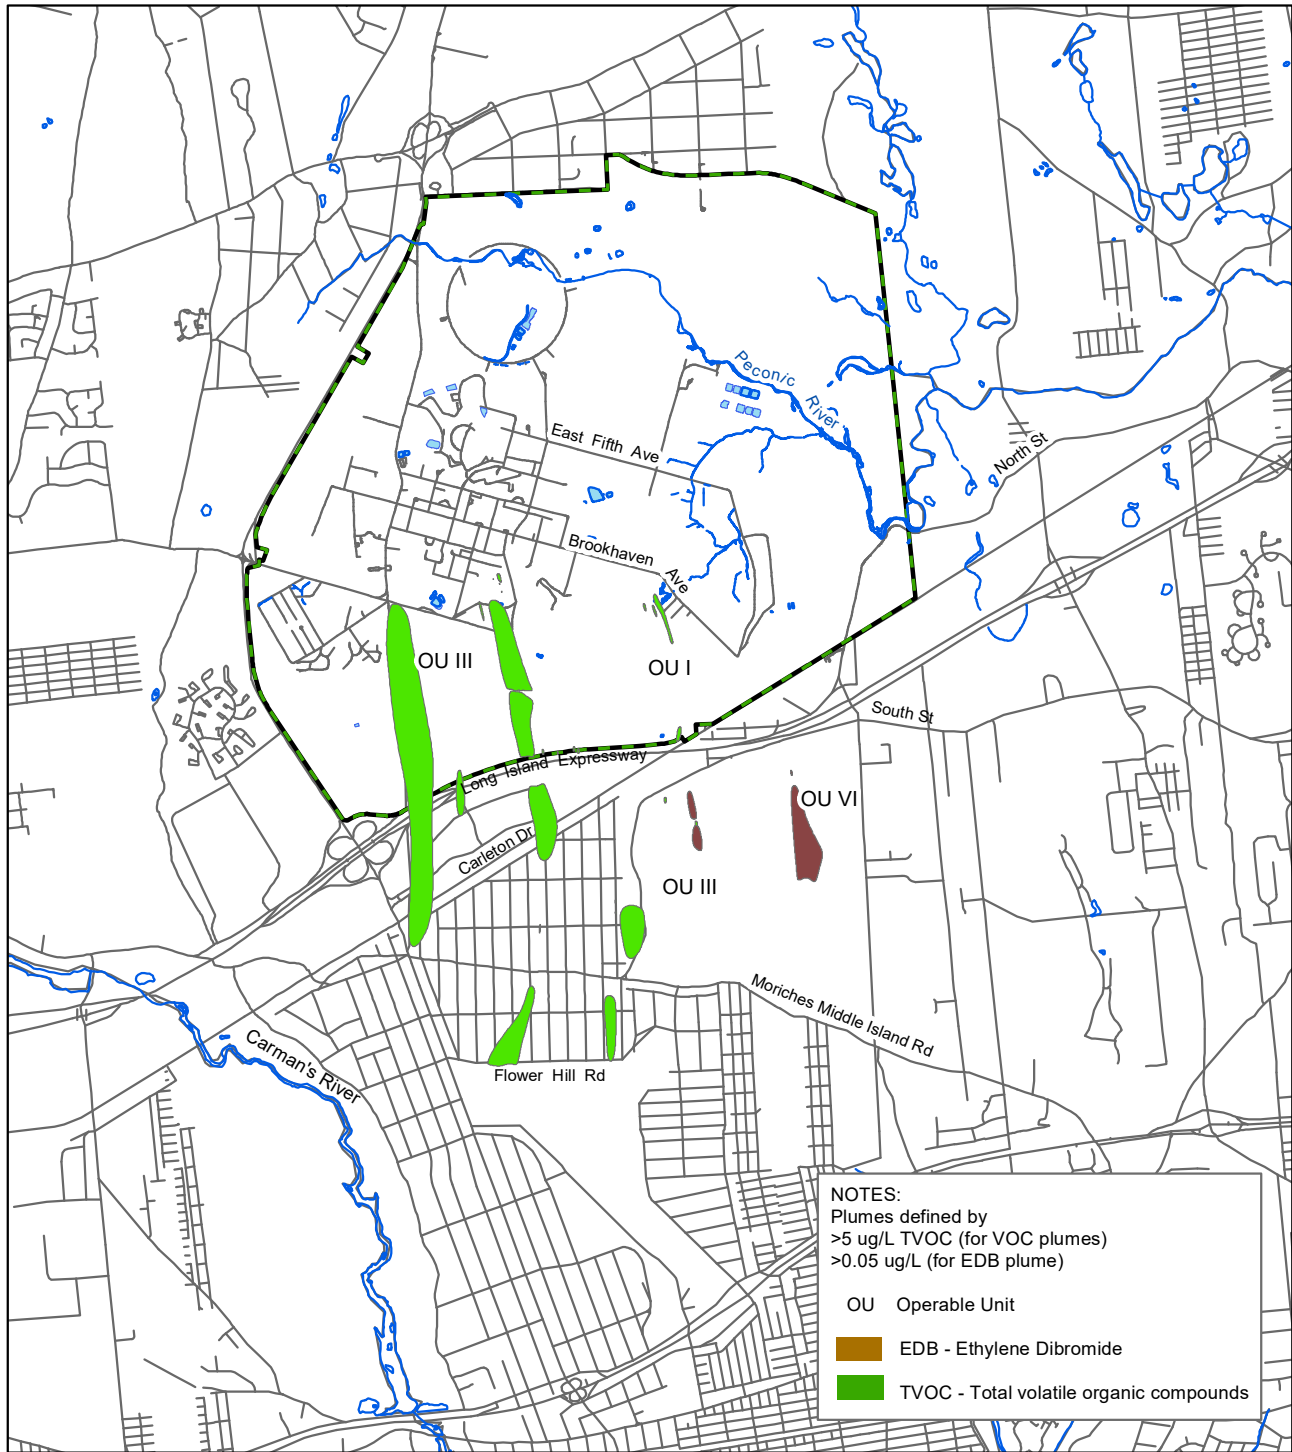


Figure 7-2. Extent of VOC Plumes.



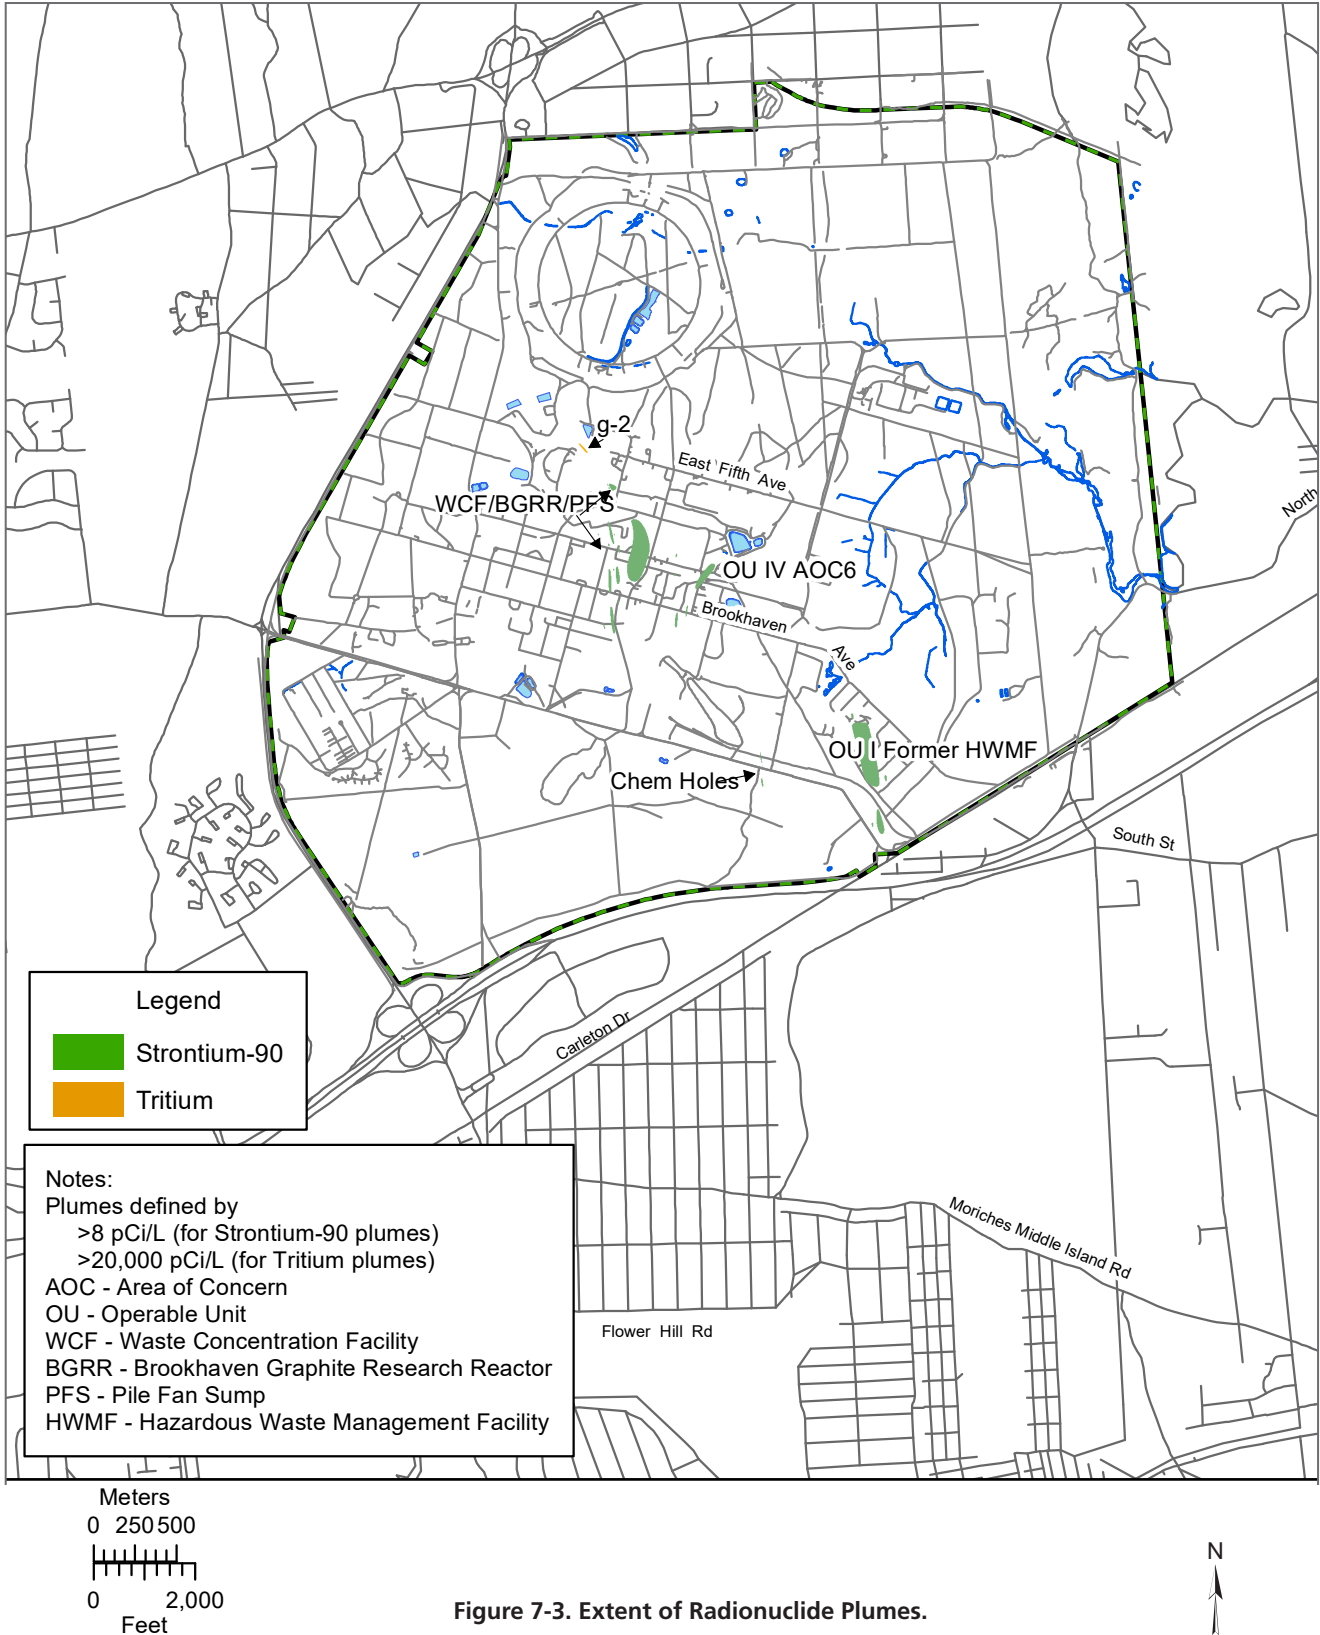


Figure 7-3. Extent of Radionuclide Plumes.



former Hazardous Waste Management Facility (HWMF), two former landfill areas, former Waste Concentration Facility (WCF) area, Brookhaven Graphite Research Reactor (BGRR), High Flux Beam Reactor (HFBR), and the Brookhaven Medical Research Reactor (BMRR). Maps showing the main VOC and radionuclide plumes are provided as Figures 7-2 and 7-3, respectively.

#### 7.4 GROUNDWATER MONITORING RESULTS

During 2021, the Facility Monitoring program monitored 89 permanent wells during 117 individual sampling events. The CERCLA groundwater monitoring program monitored 491 permanent wells during 1,805 individual groundwater sampling events. Seventy temporary wells were also installed as part of the CERCLA program, most of which were installed for the characterization of the PFAS plume and ongoing monitoring of several Sr-90 plumes. Detailed descriptions and maps related to the groundwater monitoring programs can be found in SER Volume II, Groundwater Status Report.

Highlights of the groundwater monitoring programs for 2021 include the following:

- Monitoring conducted at BNL's major research facilities (e.g., AGS, RHIC, NSLS-II, and BLIP) and most support facilities (e.g., WMF, MPF, and the site vehicle maintenance facility) did not identify any new impacts to groundwater quality resulting from current operations. However, during 2021, the corrosion inhibitor tolyltriazole (TTA) was detected in the groundwater downgradient of the STP recharge basins at concentrations up to 1.53 mg/L, which exceeded the NYS AWQS of 0.05 mg/L. Tolyltriazole was also detected at concentrations above the NYS AWQS in the groundwater downgradient of recharge basin HN at concentrations up to 0.67 mg/L.
- Temporary vertical profile wells were installed in 2021 for the OU III Middle Road and South Boundary VOC contamination and the Operable Unit VI ethylene dibromide (EDB) contamination. The 2021 CERCLA Five-Year Review indicated the need for the installation of additional groundwater extraction wells to meet the ROD cleanup goal of achieving maximum contamination levels (MCLs) by

2030. The temporary well data will be used in the pre-design groundwater modeling for modification of those remediation systems.

- Following the significant increase in Sr-90 concentrations to 1,170 pCi/L observed during 2019 in BGRR source area monitoring wells, Sr-90 concentrations decreased significantly during 2020, and were less than 5 pCi/L by early 2021. The variations in Sr-90 concentrations appear to be related to seasonal changes in the position of the water table, with higher concentrations observed following significant rises in the water table (such as in 2019) when residual Sr-90 present in the deep vadose zone soils can be leached into the groundwater.
- During 2021, BNL identified a ninth PFAS source area west of dormitory Building 170 where firefighter training apparently took place from 1986 through the early 1990s. The highest PFAs concentrations were identified in the area immediately downgradient of the training area, with maximum PFOS and PFOA concentrations of 8,470 ng/L and 66 ng/L, respectively. The plume was tracked from the former training area approximately 1,600 feet downgradient.
- Temporary and permanent wells were used to characterize PFAS in the southwest portion of the BNL site that is within the source water contributing area of the Suffolk County Water Authority's William Floyd Well Field. Low levels of PFOS and PFOA were detected in several of the wells, with maximum concentrations of 13 ng/L and 9.8 ng/L, respectively.

Detailed groundwater monitoring results including plume maps, hydrogeological cross sections, and trend charts are presented in Volume 2 of the 2021 Site Environmental Report.

#### 7.5 GROUNDWATER TREATMENT SYSTEMS

The primary mission of the CERCLA program is to operate and maintain groundwater treatment systems to remediate contaminant plumes both on- and off-site. Modifications to groundwater remediation systems are implemented, as necessary, based upon a continuous evaluation of monitoring data and system performance. The cleanup objectives will be met by a combination



**Table 7-1. BNL Groundwater Remediation Systems Treatment Summary for 1997 through 2021.**

Remediation System	Start Date	1997-2020		2021	
		Water Treated (Gallons)	VOCs Removed (Pounds) (f)	Water Treated (Gallons)	VOCs Removed (Pounds) (f)
OU I South Boundary (a)	12/1996	4,177,473,000	396	Shutdown	0
OU III HFBR Tritium Plume (a)	05/1997	721,795,000	180	Shutdown	0
OU III South Boundary	06/1997	5,284,151,000	3,061	92,000,000	9
OU III Industrial Park	09/1999	2,577,662,000	1,077	Shutdown	0
OU III Carbon Tetrachloride (d)	10/1999	153,538,000	349	Decommissioned	0
OU III Building 96	01/2001	558,697,000	145	30,000,000	1
OU III Middle Road	10/2001	3,776,547,000	1,310	165,000,000	22
OU III Western South Boundary	09/2002	2,078,855,000	165	210,000,000	16
OU III Industrial Park East (e)	06/2004	357,192,000	38	Decommissioned	0
OU III North Street (j)	06/2004	1,680,942,000	342	Shutdown	0
OU III North Street East (h)	06/2004	1,044,798,000	45	107,000,000	2
OU III LIPA/Airport	08/2004	3,741,145,000	487	236,000,000	8
OU III Building 452 Freon-11 (i)	03/2012	124,997,000	106	Shutdown	0
OU IV AS/SVE (b)	11/1997	(c)	35	Decommissioned	0
OU VI EDB	10/2004	2,498,057,000	(g)	159,000,000	(g)
<b>Total</b>		<b>28,765,549,000</b>	<b>7,700</b>	<b>999,000,000</b>	<b>58</b>

Remediation System	Start Date	2003–2020		2021	
		Water Treated (Gallons)	Sr-90 Removed (mCi)	Water Treated (Gallons)	Sr-90 Removed (mCi)
OU III Chemical Holes Sr-90	02/2003	65,663,000	4.94	Shutdown	0
OU III BGRR/WCF Sr-90	06/2005	194,603,000	29.1	14,000,000	0.3
<b>Total</b>		<b>260,266,000</b>	<b>34.04</b>	<b>14,000,000</b>	<b>0.3</b>

Notes:

- (a) System placed in standby mode in 2013. Approved for closure in 2019.
- (b) System decommissioned in 2003.
- (c) Air Sparging/Soil Vapor Extraction (AS/SVE) system performance was measured by pounds of VOCs removed per cubic feet of air treated.
- (d) System decommissioned in 2010.
- (e) System decommissioned in 2014.
- (f) Values are rounded to the nearest whole number.
- (g) Because EDB has only been detected at trace levels in the treatment system influent, no removal of VOCs is reported.
- (h) North Street East system was restarted in July 2020 for treatment of EDB plume.

- (i) System placed in standby mode in March 2017. Approved for closure in 2019.
- (j) System placed in standby mode in August 2016. BGRR = Brookhaven Graphite Research Reactor  
EDB = ethylene dibromide  
HFBR = High Flux Beam Reactor  
LIPA = Long Island Power Authority  
OU = operable unit  
VOCs = volatile organic compounds  
WCF = Waste Concentration Facility

of active treatment and natural attenuation: The specific cleanup goals are as follows:

- Achieve MCLs for VOCs in the Upper Glacial aquifer by 2030.
- Achieve MCLs for VOCs in the Magothy aquifer by 2065.

- Achieve MCLs for Sr-90 at the BGRR in the Upper Glacial aquifer by 2070.
- Achieve MCLs for Sr-90 at the Chemical Holes in the Upper Glacial aquifer by 2040. During 2021, BNL continued to make significant progress in restoring groundwater quality.

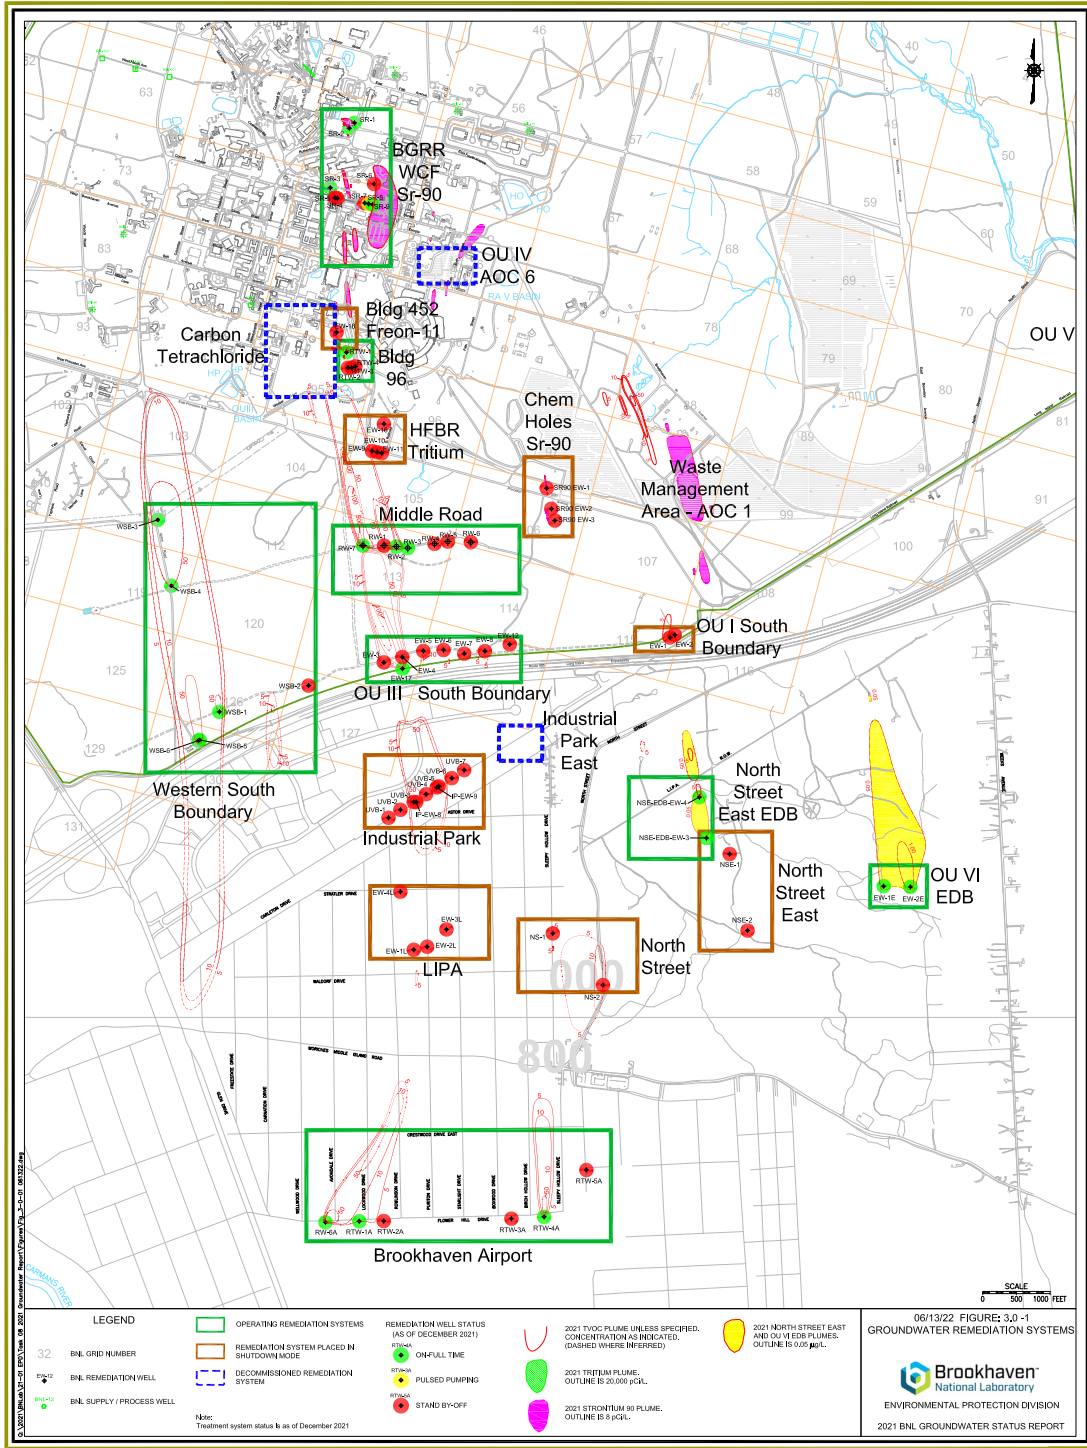


Figure 7-4. Locations of BNL Groundwater Remediation Systems.



## CHAPTER 7: GROUNDWATER PROTECTION

Figure 7-4 shows the locations of eight groundwater treatment systems currently in operation. Table 7-1 provides a summary of the amounts of VOCs and Sr-90 removed from the aquifer since the start of active remediation in December 1996. During 2021, approximately 58 pounds of VOCs and 0.3 mCi of Sr-90 were removed from the groundwater and nearly one billion gallons of treated groundwater were returned to the aquifer. To date, 7,758 pounds of VOCs have been removed from the aquifer and noticeable improvements in groundwater quality are evident

in several on and off-site areas. Furthermore, two of the treatment systems have removed approximately 34.3 mCi of Sr-90. Detailed information on the groundwater contaminant plumes and treatment systems can be found in SER Volume II, Groundwater Status Report.

### REFERENCES AND BIBLIOGRAPHY

BNL 2018. Groundwater Protection Contingency Plan – Response to Unexpected Monitoring Results. Environmental Monitoring Procedure EM-SOP-309. Brookhaven National Laboratory, Upton, NY. August 2018.



# Radiological Dose Assessment

---

The Brookhaven National Laboratory (BNL) annual radiological dose assessment assures stakeholders that on-site facilities and BNL operations are compliant with federal, state, and local regulations and that the public is protected. The potential radiological dose to members of the public is calculated at an off-site location where models indicate a site-emission source could result in the maximum dose to an off-site individual, defined as the “maximally exposed off-site individual” (MEOSI). Based on MEOSI dose calculation criteria, all members of the public will receive a dose less than the MEOSI. The dose to the MEOSI is the total dose from direct and indirect dose pathways via air immersion, inhalation of particulates and gases, and ingestion of local fish and deer meat. In 2021, the total effective dose (TED) to the MEOSI of 3.61 mrem (36.1  $\mu$ Sv) from Laboratory operations was well below the dose limit of 100 mrem required by DOE Order 458.1, as well as all other U.S. Environmental Protection Agency (EPA) and U.S. Department of Energy (DOE) regulatory dose limits for the public, workers, and the environment.

Five years of measurement data are shown in the data tables of this chapter to present and describe trends in measured ambient radiation dose at BNL. In general, the radiological footprint at BNL continues to slowly grow, with a recent dose peak in 2018, as testing for Ac-225 production occurred. The ambient dose increased slightly in 2021 as testing for that production process resumed.

The dose estimates for 2021 were calculated using a recent version of the dose modeling software promulgated by the EPA. All data in this chapter are reported with uncertainties at the 95 percent (2-sigma) confidence level. As such, the effective dose equivalent (EDE) from air emissions in 2021 was estimated at  $7.1 \times 10^{-1}$  mrem (7.1  $\mu$ Sv) to the MEOSI. This BNL dose level from the inhalation pathway was 7.1 percent of the EPA’s annual regulatory dose limit of 10 mrem (100  $\mu$ Sv). In addition, the dose from the ingestion pathway was estimated as 2.9 mrem (29  $\mu$ Sv) from the consumption of deer meat. The onsite portions of the Peconic River did not have sufficient water to support fish populations of sufficient size for surveillance monitoring, therefore there was no dose attributable to BNL legacy Cs-137 levels in fish in the Peconic River. In summary, the total annual dose to the MEOSI from all pathways was estimated at 3.61 mrem (36.1  $\mu$ Sv), which is less than 4.0 percent of DOE’s 100-mrem limit. The aggregate population dose was 0.773 person-rem among approximately six million people residing within a 50-mile radius of the Laboratory. On average, this is equivalent to a fraction of an airport whole body scan per person.

Dose to the maximally exposed individual (MEI) on site and outside of controlled areas, calculated from thermoluminescent dosimeter (TLD) monitoring records, was 7 mrem above natural background radiation levels, also well below the 100-mrem DOE limit on dose. The average annual external dose from ambient sources on site was  $68 \pm 11$  mrem ( $680 \pm 110$   $\mu$ Sv), while the dose from off-site ambient sources was  $68 \pm 11$  mrem ( $680 \pm 110$   $\mu$ Sv). Both on- and off-site external dose measurements include the contribution from natural terrestrial and cosmic background radiation. A statistical comparison of the average doses measured using 50 on-site TLDs and 17 off-site TLDs showed that there was no external dose contribution from BNL operations distinguishable from the natural background radiation level. Additional TLDs were used to measure on-site areas known to receive radiation dose slightly above the natural background radiation.

Doses to aquatic and terrestrial biota were also found to be well below DOE regulatory limits. In summary, the overall dose impact from all Laboratory activities in 2021 was comparable to that of natural background radiation levels.

## 8.0 INTRODUCTION

Chapter 8 discusses the dose risk consequences from research activities, radiation-generating devices, facilities, and minor bench-top radiation sources at BNL. It is important to understand the health impacts of radiation to the public and workers, as well as radiation effects to the environment, fauna, and flora. To this end, the Laboratory's routine operations, scientific experiments, and new research projects are evaluated for their radiological dose risk. The dose risks from demolishing decommissioned facilities and decontamination work are also evaluated. All environmental pathway scenarios with potential for dose to humans, aquatic life, plants, and animals are evaluated to estimate the dose risks on site.

Because all research reactors at BNL have been shut down, defueled, and partly or fully decommissioned for several years, the dose risk from these facilities was trivial in 2021. The Laboratory's current radiological risks are from very small quantities of radionuclides used in science experiments, production of radiopharmaceuticals at the Brookhaven LINAC Isotope Producer (BLIP), and small amounts of air activation produced at the BNL accelerators: Alternating Gradient Synchrotron (AGS), Relativistic Heavy Ion Collider (RHIC), and the National Synchrotron Light Source II (NSLS-II). These radiological dose evaluations are performed to ensure that dose risks from all Laboratory operations meet regulatory requirements and remain "As Low As Reasonably Achievable" (ALARA) to members of the public, workers, and the environment.

## 8.1 DIRECT RADIATION MONITORING

A direct radiation monitoring program is used to measure the external dose contribution to the public and workers from radiation sources at BNL. This is achieved by measuring direct penetrating radiation exposures at both on- and off-site locations. The direct measurements taken at the off-site locations are based on the premise that off-site exposures represent true natural background radiation levels with contributions from cosmic and terrestrial sources, and with no contributions from Laboratory operations.

On- and off-site external dose measurements are averaged separately and then compared

using standard statistical methods to assess the contribution, if any, from Laboratory operations.

### 8.1.1 Ambient Radiation Monitoring


To assess the dose impact of direct radiation from BNL operations, TLDs are deployed on-site and in the surrounding communities. On-site TLD locations are determined based on the potential for exposure to gaseous plumes, atmospheric particulates, scattered radiation, and the location of radiation-generating devices. The Laboratory perimeter is also posted with TLDs to assess the dose impact, if any, beyond the site's boundaries (See Photo 8-1). On- and off-site land areas are divided into grids, and each TLD is assigned a unique identification code based on those grids.



**Photo 8-1. TLD at P-4 Perimeter Station**

In 2021, a total of 60 environmental TLDs were deployed on site, ten of which were placed in known radiation areas. A total of 17 environmental TLDs were deployed at off-site locations (see Figures 8-1 and 8-2). In 2021, all 16 wind sectors around the Laboratory had TLD locations. An additional 30 TLDs were stored in a lead-shielded container for use as reference and control TLDs for comparison purposes. The total of the control TLD dose values for 2021, reported as 075-TLD4



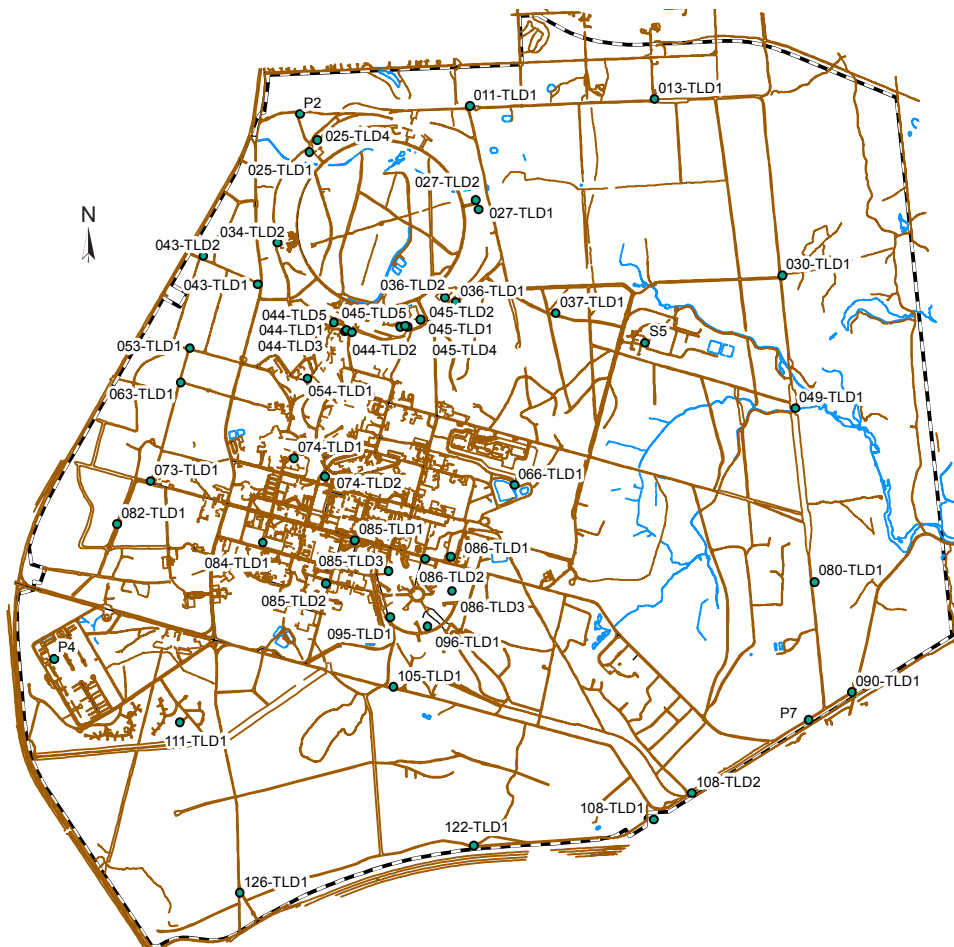

**Figure 8-1. On-Site TLD Locations.**

in Tables 8-1 and 8-2, was  $35 \pm 12$  mrem. This dose accounts for any small residual dose not removed from TLDs during the annealing process and the natural background and cosmic radiation sources that are not completely shielded.

The on- and off-site TLDs were collected and read quarterly to determine the annual total external radiation dose measured. Table 8-1 shows the annual on-site radiation dose measurements from 2017 to 2021. For 2021, the on-site external dose from all potential environmental sources, including cosmic and terrestrial radiation sources, was  $68 \pm 11$  mrem ( $680 \pm 110$   $\mu$ Sv). The on-site measurements in this table generally exhibit

year-to-year variation within ten percent or less of the average. The same can be said about the off-site measured doses in Table 8-2, which shows the annual off-site radiation dose measurements from 2017 to 2021. The off-site ambient dose in 2021 from all potential environmental sources, including cosmic and terrestrial radiation sources, was  $68 \pm 11$  mrem ( $680 \pm 110$   $\mu$ Sv).

To determine the BNL contribution to the external direct radiation dose, a statistical t-test between the measured on- and off-site external doses was conducted. The test showed no significant difference between the off-site dose ( $68 \pm 11$  mrem) and on-site dose ( $68 \pm 11$  mrem) at the

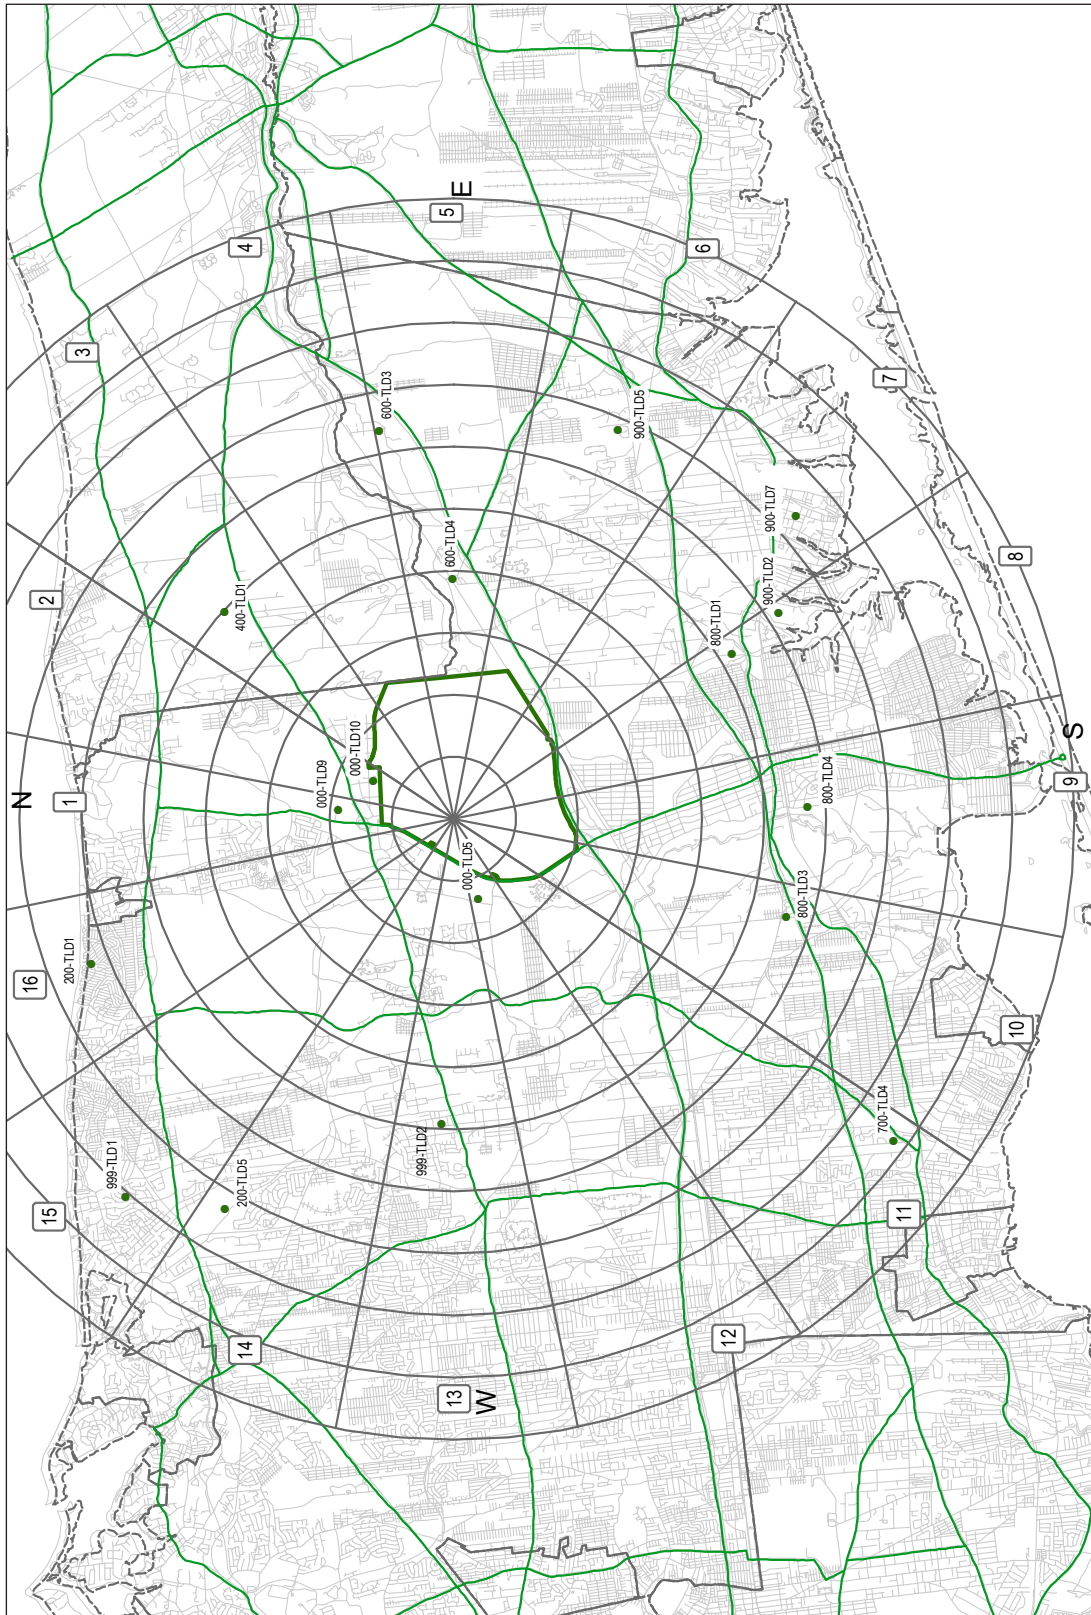


Figure 8-2. Off-Site TLD Locations.

Table 8-1. Five-Year Annual On-Site Direct Ambient Radiation Measurements (2017-2021).

TLD#	Location	Annual Total Dose, mrem ( $\pm 2\sigma$ , 95% conf. interval)				
		2017	2018	2019	2020	2021
011-TLD1	North Firebreak	56±12	58±8	55±13	58±3	61±8
013-TLD1	North Firebreak	61±8	61±11	62±12	61±4	68±10
025-TLD1	Bldg. 1010, Beam Stop 1	61±12	63±7	58±14	63±19	70±12
025-TLD4	Bldg. 1010, Beam Stop 4	67±22	62±10	59±9	60±11	64±11
027-TLD1	Bldg. 1002A South	58±9	60±9	58±14	57±9	62±13
027-TLD2	Bldg. 1002D East	58±12	62±18	55±13	56±9	62±14
030-TLD1	Northeast Firebreak	64±11	64±11	59±7	64±9	65±13
034-TLD1	Bldg. 1008, Collimator 2	73±0	NLP	NLP	NLP	NLP
034-TLD2	Bldg. 1008, Collimator 4	66±9	67±12	65±11	66±10	71±10
036-TLD1	Bldg. 1004B, East	58±14	57±9	58±12	56±12	62±8
036-TLD2	Bldg. 1004, East	61±12	62±10	58±11	58±4	66±12
037-TLD1	S-13	60±11	59±7	58±12	62±7	67±12
043-TLD1	North Access Road	66±6	69±11	68±14	66±10	72±15
043-TLD2	North of Meteorology Tower	67±11	66±10	65±15	67±6	71±12
044-TLD1	Bldg. 1006	67±11	69±13	61±10	61±8	67±10
044-TLD2	South of Bldg. 1000E	67±8	67±11	64±6	62±9	70±10
044-TLD3	South of Bldg. 1000P	65±10	66±20	60±10	59±8	64±10
044-TLD4	Northeast of Bldg. 1000P	84±0	NLP	NLP	NLP	NLP
044-TLD5	North of Bldg. 1000P	67±18	67±14	59±9	63±7	66±19
045-TLD1	Bldg. 1005S	62±10	63±14	62±9	61±10	69±10
045-TLD2	East of Bldg. 1005S	62±10	67±10	59±10	63±16	67±11
045-TLD3	Southeast of Bldg. 1005S	69±0	NLP	NLP	NLP	NLP
045-TLD4	Southwest of Bldg. 1005S	64±13	69±21	61±13	62±6	68±7
045-TLD5	West-Southwest of Bldg. 1005S	60±11	66±14	64±12	61±5	70±11
049-TLD1	East Firebreak	65±11	70±11	62±10	66±16	55±13
053-TLD1	West Firebreak	66±7	71±11	71±22	72±6	74±17
063-TLD1	West Firebreak	70±13	72±6	68±14	71±4	74±9
066-TLD1	Waste Management Facility	57±12	60±9	52±11	55±5	64±13
073-TLD1	Meteorology Tower	66±12	66±11	63±6	69±10	68±11
074-TLD1	Bldg. 560	72±21	73±15	67±13	65±10	73±13
074-TLD2	Bldg. 907	63±10	66±14	61±19	62±9	69±12
080-TLD1	East Firebreak	70±10	72±6	70±18	66±5	75±11
082-TLD1	West Firebreak	71±13	73±7	71±13	74±9	82±8
084-TLD1	Tennis Courts	63±7	72±19	63±12	65±8	70±7
085-TLD1	Bldg. 735	66±16	68±11	65±15	65±12	69±14
085-TLD2	Upton Gas Station	67±7	66±9	66±17	67±9	69±10
085-TLD3	NSLS-II LOB 745	64±4	71±13	68±20	66±6	72±7
086-TLD1	Baseball Fields	64±7	66±8	61±11	66±8	69±9
086-TLD2	NSLS-II LOB 741	59±3	64±14	56±11	61±17	65±9
086-TLD3	NSLS-II LOB 742	55±4	59±11	60±16	62±12	66±12
090-TLD1	North St. Gate	66±7	64±9	62±11	61±8	49±7

(continued on next page)

**Table 8-1. Five-Year Annual On-Site Direct Ambient Radiation Measurements (2017-2021).** (concluded).

TLD#	Location	Annual Total Dose, mrem ( $\pm 2\sigma$ , 95% conf. interval)				
		2017	2018	2019	2020	2021
095-TLD1	NSLS-II LOB 744	68±2	70±8	68±19	70±13	77±19
096-TLD1	NSLS-II LOB 743	58±3	62±10	59±12	58±8	64±15
105-TLD1	South Firebreak	70±8	68±14	73±24	69±10	73±10
108-TLD1	Water Tower	73±25	65±11	62±12	64±5	68±9
108-TLD2	Tritium Pole	77±14	82±16	82±9	78±9	85±5
111-TLD1	Trailer Park	65±7	72±6	69±10	66±9	73±6
122-TLD1	South Firebreak	64±16	62±11	60±12	61±6	68±12
126-TLD1	South Gate	72±16	75±17	68±9	72±13	76±10
P2	NW Corner Site Perimeter Station	56±9	58±8	55±10	56±5	60±10
P4	SW Corner Site Perimeter Station	64±16	64±11	60±12	59±10	68±9
P7	SE Corner Site Perimeter Station	66±12	66±9	64±10	66±10	71±15
S5	Sewage Treatment Plant	58±11	61±11	57±13	61±9	67±11
<b>On-Site Average</b>		<b>65±11</b>	<b>66±11</b>	<b>62±12</b>	<b>64±9</b>	<b>68±11</b>
<b>Off-site average (Table 8-2)</b>		<b>61±11</b>	<b>64±10</b>	<b>59±11</b>	<b>61±14</b>	<b>68±11</b>
<b>075-TLD4: Control TLD Average</b>		<b>29±3</b>	<b>30±2</b>	<b>27±3</b>	<b>29±4</b>	<b>35±12</b>

Notes :

See Fig. 8-1 for TLD Locations

Note: Beginning with the 2017 calendar year, a handful of stable-dose-level TLDs were moved from other locations onsite to the NSLS-II locations. NLP = No Longer Posted. TLDs were removed from these locations to be posted at NSLS-II.

95 percent confidence level. From the measured TLD doses, it can be safely concluded that there was no measurable external dose contribution to on- or off-site locations from Laboratory operations in 2021.

### 8.1.2 Facility Area Monitoring

Ten on-site TLDs are designated as facility area monitors (FAMs) because they are posted in known radiation areas (i.e., near facilities). Table 8-3 shows the external doses measured with the FAM TLDs from 2017 to 2021. Environmental TLDs 088-TLD1 through 088-TLD4 are posted at and near the S-6 blockhouse location on the fence of the Former Waste Management Facility (FWMF). Except for the doses at S6 and 088-TLD4, which were consistent with the site average dose, the TLDs measured external doses that were slightly elevated compared to the normal natural background radiation doses measured in other areas on site. This can be attributed to the presence of small amounts of

contamination in the soil. The 088-TLD1 had the highest dose reading of the four, which can be attributed to waste-loading activities at the nearby rail spur in recent years, including 2021. As shown in Table 8-3, overall dose levels near the FWMF have been fairly consistent. Access to the FWMF is controlled by fencing.

Two TLDs (075-TLD3 and 075-TLD5) near Building 356 showed an annual dose, lower than 2020's dose, of  $83 \pm 11$  mrem ( $830 \pm 110 \mu\text{Sv}$ ) for 075-TLD3 and  $92 \pm 23$  mrem ( $920 \pm 230 \mu\text{Sv}$ ) for 075-TLD5. These doses are higher than the on-site annual average because Building 356 houses a Co-60 source which is used to irradiate materials, parts, and printed circuit boards, and its collimators were removed in 2018 to allow targets to be placed closer to the source due to source decay. In addition, the source is exposed for longer periods, sometimes overnight, and generates "sky-shine." However, in 2021 the doses were lower due to a pandemic-related drop in usage. Although it is conceivable for individuals who use

Table 8-2. Five-Year Annual Off-Site Direct Ambient Radiation Measurements (2017-2021).

TLD#	Location	Annual Total, mrem ( $\pm 2\sigma$ , 95% Conf. Interval)				
		2017	2018	2019	2020	2021
000-TLD5	Longwood Estate	58±8	59±11	58±15	58±7	60±14
000-TLD9	Private property	56±7	58±9	53±10	61±13	74±21
000-TLD10	Private property	65±7	66±10	62±8	61±16	69±8
200-TLD1	Private property	NYP	71±14	66±12	70±20	78±25
200-TLD5	Private property	NYP	78±10	74±21	69±38	80±14
400-TLD1	Calverton Nat. Cemetery	68±14	71±10	61±9	67±8	72±6
600-TLD3	Private property	62±8	68±12	59±2	65±10	69±7
600-TLD4	Maples B&G	57±9	59±7	57±11	59±10	64±5
700-TLD4	Private property	60±7	61±10	57±6	56±9	65±7
800-TLD1	Private property	65±21	65±14	56±9	63±11	69±11
800-TLD3	Suffolk County CD	62±5	62±8	61±16	63±12	62±6
800-TLD4	LI Nat'l Wildlife Refuge	58±12	63±4	56±12	59±10	64±12
900-TLD2	Private property	62±26	62±18	57±15	56±14	64±11
900-TLD5	Private property	54±5	59±7	50±3	49±8	55±14
900-TLD7	Private property	NYP	67±8	61±13	64±18	72±12
999-TLD1	Private property	61±7	64±7	58±12	64±18	65±14
999-TLD2	Private property	NYP	73±2	52±12	61±13	73±7
<b>Off-site average</b>		<b>61±11</b>	<b>64±10</b>	<b>59±11</b>	<b>61±14</b>	<b>68±11</b>
<b>075-TLD4 : Control TLD Average</b>		<b>29±3</b>	<b>30±4</b>	<b>27±3</b>	<b>29±4</b>	<b>35±12</b>

Notes:

See Fig. 8-2 for TLD Locations

Note: TLDs are placed by volunteers or other entities.

Year-to-year, willingness to participate varies among owners at these locations.

NYP = Not Yet Posted with TLDs.

Table 8-3. Five-Year Annual Facility Area Monitoring Results (2017-2021).

TLD#	Location	Annual Total, mrem ( $\pm 2\sigma$ , 95% Conf. Interval)				
		2017	2018	2019	2020	2021
054-TLD1	Bldg. 914	83±44	91±48	75±33	65±12	79±25
054-TLD2	NE of Bldg. 913B	85±53	86±49	76±30	66±13	77±26
054-TLD3	NW of Bldg. 913B	76±43	81±47	72±24	66±13	77±30
S6	FWMF	70±13	71±11	69±17	69±11	73±10
088-TLD1	FWMF, 50' East of S6	82±5	84±12	77±12	79±7	87±12
088-TLD2	FWMF, 50' West of S6	73±11	74±12	72±13	77±14	76±14
088-TLD3	FWMF, 100' West of S6	77±12	75±7	74±8	74±11	80±11
088-TLD4	FWMF, 150' West of S6	65±7	67±8	69±13	66±11	71±12
075-TLD3	Bldg. 356	85±22	80±18	100±17	99±9	83±11
075-TLD5	North Corner of Bldg. 356	86±24	80±22	109±20	107±14	92±23

Notes:

See Figure 8-1 for TLD locations.

FWMF = Former Waste Management Facility



the parking lot adjacent to Building 356 to receive a dose from these sources, the dose would be small due to the low occupancy factor.


Three FAM TLDs that were near Building 914 and placed on fence sections northeast and northwest of Building 913B (the AGS tunnel access) showed slightly elevated ambient external dose. The full-year dose at these sites was measured at 79 mrem for 054-TLD1, 77 mrem for 054-TLD2, and 77 mrem for 054-TLD3 (compared to the on-site dose of  $68 \pm 11$  mrem and off-site dose of  $68 \pm 11$  mrem). The slightly higher levels of the first and second quarters (not shown) are expected because the operating period for the AGS is typically in the first half of the calendar year.

**8.1.2.1 Neutron Monitoring**

The AGS accelerates protons to energies up to 30 GeV and heavy ions up to 15 GeV/amu. At the RHIC, protons and heavy ions received from the AGS are further accelerated up to final

energies of 250 GeV for protons and 100 GeV for ions. Under these high-energy conditions, such accelerated particles have the potential to generate high-energy neutrons when the particles leave the walls of the accelerator and produce nuclear fragments along their path or as they collide with matter. In 2021, 11 pairs of neutron monitoring TLDs (Harshaw Badge 8814) were posted at strategic locations to measure the dose contribution from the high-energy neutrons (see Figure 8-3 for locations).

The placement of neutron TLDs is based on facility design aspects such as the thickness of the berm shielding, location of soil activation areas, beam stop areas and beam collimators, and proximity to the site boundary. The neutron TLDs are placed on polyethylene cylinders so that incident neutrons, which are at a high enough energy to pass through the TLD undetected, are thermalized by the hydrocarbons in the polyethylene and reflected back out, where the TLD can

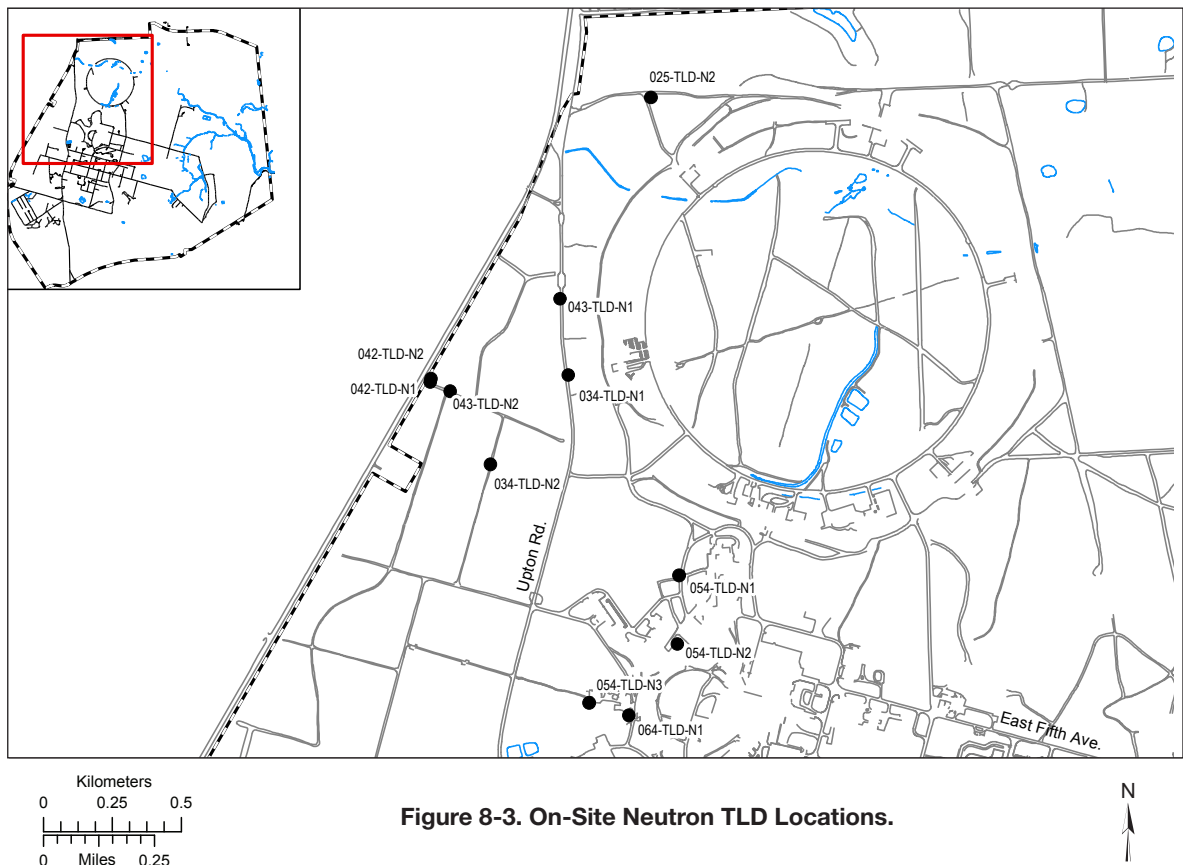

**Figure 8-3. On-Site Neutron TLD Locations.**

detect them. The neutron TLDs are mounted in pairs, for three reasons: The dose registered on these TLDs is low, so a matching number on the second TLD adds confidence to the dose measured by the first one; two neutron TLDs side-by-side decreases the potential dependence of measured dose on mounting orientation; and the reflected neutron could strike either neutron TLD and be counted (see Photo 8-2).

Table 8-4 shows the measured ambient neutron doses recorded from 2017 to 2021. In 2021, ten neutron TLD locations showed 1 mrem, four showed 2 mrem, and two showed 3 mrem, for a total of 24 mrem. These low-level neutron doses indicate that engineering controls (i.e., berm shielding) in place at AGS and RHIC are effective.

## 8.2 DOSE MODELING FOR AIRBORNE RADIONUCLIDES

The EPA regulates radiological emissions from DOE facilities under the requirements set forth in 40 CFR 61, Subpart H, National Emission Standards for Hazardous Air Pollutants (NESHAPs). This regulation specifies the compliance and monitoring requirements for reporting radiation doses received by members of the public from airborne radionuclides. The regulation mandates that no member of the public shall receive a dose greater than 10 mrem (100  $\mu$ Sv) in a year from airborne emissions.

The emission monitoring requirements include the use of a reference method for continuous monitoring at major release points (defined as those with a potential to exceed one percent of the 10 mrem standard) and periodic confirmatory measurements for all other release points. The regulations also require DOE facilities to submit an annual NESHAPs report to the EPA that describes the major and minor emission sources, their releases, and their resultant dose to the Maximally Exposed Off Site Individual (MEOSI). The dose estimates from various facilities are given in Table 8-5, and the actual air emissions for 2021 are discussed in detail in Chapter 4.

As a part of the NESHAPs review process at BNL, any emission source, such as a stack, that has the potential to release airborne radioactive materials is evaluated for regulatory compliance. Under the Comprehensive Environmental



**Photo 8-2. Neutron TLDs in Monitored Area**

Response, Compensation, and Liability Act (CERCLA), certain restoration activities are also monitored and assessed for any potential to release airborne radioactive materials, and to determine their dose contribution, if any, to the environment. Any new radiological processes or activities are also evaluated for compliance with NESHAPs regulations using the EPA's approved dose modeling software (see Section 8.2.1 for details). Because this model is designed to treat radioactive emission sources as continuous over the course of a year, it is not well-suited for estimating the dose from short-term or acute releases. Consequently, the modeling software overestimates potential dose contributions from short-term projects and area sources. For that reason, such modeling results are conservative.

### 8.2.1 Dose Modeling Program

Compliance with NESHAPs regulations is demonstrated using EPA dose-modeling software and the Clean Air Act Assessment Package 1988 (CAP88-PC). This computer program uses a Gaussian plume model to characterize the average dispersion of airborne radionuclides released from elevated stacks or diffuse sources. CAP88-PC then calculates the effective dose equivalent (EDE) to the MEOSI from radioactive materials released into the environment. Site-specific meteorology data was used to calculate annual emission dispersions for the midpoint of a given wind sector and distance. Facility-specific radionuclide emission rates (Ci/yr) were used for continuously monitored facilities. For small sources, the emissions were calculated using the method set forth in 40 CFR 61, Appendix D. CAP88-PC calculated

**Table 8-4. Five-Year Annual Neutron Monitoring Results (2017-2021).**

Neutron TLD #	Location ID No.	Annual Total, mrem neutron				
		2017	2018	2019	2020	2021
TK275	025-TLD-N1	0	NLP	NLP	NLP	NLP
TK276	"	0	NLP	NLP	NLP	NLP
TK277	025-TLD-N2	0	0	0	2	2
TK278	"	2	2	0	0	1
TK279	034-TLD-N1	1	0	1	1	0
TK280	"	0	1	0	0	2
TK281	034-TLD-N2	0	0	0	0	0
TK282	"	1	1	0	0	1
TK283	043-TLD-N1	0	0	0	1	2
TK284	"	1	0	0	0	1
TK285	043-TLD-N2	0	0	0	0	1
TK286	"	0	1	2	0	1
TK287	042-TLD-N1	0	0	1	1	1
TK288	"	0	0	1	0	2
TK289	042-TLD-N2	0	0	0	0	1
TK290	"	0	0	0	0	1
TK291	054-TLD-N1	0	0	0	2	0
TK292	"	0	0	0	0	0
TK293	054-TLD-N2	1	0	0	0	3
TK294	"	2	0	0	0	3
TK295	054-TLD-N3	0	0	0	0	1
TK296	"	0	0	1	2	1
TK297	064-TLD-N1	1	0	0	0	0
TK298	"	0	1	0	1	0
PM-bkg		1	1	1	1	2

NLP = No Longer Posted. TLDs were removed from these locations to be posted at NSLS-II. "PM-bkg" = The background dose-rate levels in the Personnel Monitoring (PM) counting room where the TLDs are stored and prepared for issue.

the EDE at the MEOSI location from the immersion, inhalation, and ingestion pathways, and also calculated the collective population dose within a 50-mile radius of the emission source.

As stated above, these dose and risk calculations to the MEOSI are based on low-level emissions and chronic intakes. In most cases, the CAP88PC model provides conservative dose estimates. For the purpose of modeling their dose to the MEOSI, all emissions are treated as having been released from the BLIP Facility, which is used to represent the developed portion of the site.

The dose calculations are based on very low concentrations of environmental releases and on chronic, continuous intakes in a year. The input parameters used in the model include radionuclide type, emission rate in Curies (Ci) per year, stack parameters such as height and diameter, and emission exhaust velocity. Site-specific weather and population data are also factored into the dose assessment. As mentioned earlier, weather data are supplied by measurements from the Laboratory's meteorological towers. Such measurements include wind speed, direction,

Table 8-5. Maximally Exposed Off-site Individual Effective Dose Equivalent From Facilities or Routine Processes, 2021.

Building No.	Facility or Process	Construction Permit No.	MEOSI Dose (mrem) (a)	Notes
120	Instrumentation & Calibration	None	ND	(f)
348	Instrumentation & Calibration	None	ND	(f)
463	Biology	None	5.22E-08	(b)
480	Condensed Matter Physics	None	ND	(f)
490	Personnel Monitoring/NN	None	8.08E-09	(b)
490	Nonproliferation & National Security	None	ND	(g)
510A	Physics	None	ND	(f)
535	Instrumentation	None	ND	(f)
555	Chemistry Facility	None	7.44E-11	(b)
734	Condensed Matter Physics	None	7.01E-15	(b)
735	Center for Functional Nanomaterials	None	ND	(f)
745	NSLS-II	None	1.61E-08	(b)
750	HFBR	None	5.68E-05	(c)
801	Target Processing Lab	None	2.45E-07	(c)
815	Nonproliferation & National Security	None	3.22E-09	(b)
817	Nuclear Science & Technology	None	2.95E-13	(b)
820	Accelerator Test Facility	BNL-589-01	ND	(f)
830	Environmental Science Department	None	ND	(f)
865	Waste Management Facility	None	ND	(d)
902	Superconducting Magnet Division	None	ND	(f)
906	Imaging Lab	None	ND	(f)
911	Collider-Accelerator	None	ND	(g)
925	RF Systems	None	ND	(f)
931	BLIP	BNL-2009-01	7.09E-01	(c)
942	AGS Booster	BNL-188-01	ND	(e)
---	RHIC	BNL-389-01	ND	(d)
<b>Total Potential Dose from BNL Operations</b>			<b>7.09E-01</b>	
<b>EPA Limit (Air Emissions)</b>			<b>10</b>	

## Notes:

MEOSI = Maximally Exposed Offsite Individual

(a) "Dose" in this table means effective dose equivalent to MEOSI.

(b) Dose is based on emissions calculated using 40CFR61, Appendix D methodology.

(c) Emissions are continuously monitored at the facility.

(d) ND=No Dose from emissions source in 2021.

(e) Booster ventilation system prevents air release through continuous air recirculation.

(f) No radiological dispersible material inventory in 2021.

(g) Sealed sources were excluded from this inventory - no emission

and frequency, as well as air temperature and precipitation amount (see Chapter 1 for details). Solar radiation effects are also accounted for. A population of six million people, based on the Geographical Information System design population survey performed by Oak Ridge National Laboratory for BNL, was used in the model.

The 2021 effective dose equivalents were estimated using Version 4.0.1.17 of CAP88-PC. The following approaches and assumptions supported the dose estimates in this annual report:

- A conservative approach is used for agricultural data input to the CAP88 modeling program, with 92 percent of vegetables, 100 percent of milk, and 99 percent of meat assumed to originate from the assessment area.
- The velocity of the exhaust from the BLIP facility stack was updated to reflect current operation. The average volumetric flow rate of the BLIP exhaust system in 2021 was 522.1 cfm, or 0.246 m<sup>3</sup>/sec. With an exit diameter of 0.1 m, the exit velocity was 31.37 m/sec, up slightly from last year's 30.6 m/sec.
- The method of characterizing atmospheric stability for purposes of estimating effluent dispersion was the Solar Radiation/Delta Temperature method for conservatism. This method takes into account the most variations in atmospheric conditions, such as solar radiation heating and cooling, and results in the highest dose in comparison to the other known methods.

## 8.2.2 Dose Calculation Methods and Pathways

### 8.2.2.1 Maximally Exposed Off-site and On-site Individual

The MEOSI is defined as a person who resides at a residence, office, or school located beyond the BNL site boundary such that no other member of the public could receive a higher dose. This person is assumed to reside 24 hours a day, 365 days a year, off-site, and close to the emission point nearest to the BNL site boundary. The MEOSI is also assumed to consume significant amounts of fish and deer containing radioactivity assumed to be attributable to Laboratory operations, based on projections from the New York State Department of Health (NYSDOH). It is highly

unlikely that such a combination of “maximized dose” to any single individual would occur, but the concept is useful for evaluating maximum potential dose and risk to members of the public. The dose to the onsite maximally exposed individual (MEI) who could receive any dose outside of BNL's controlled areas was determined by TLD measurements (see Table 8-7). The dose to the MEI on site and outside of controlled areas (near Building 356) was measured at 7 mrem in 2021. The decrease in MEI dose in 2021 was due to a sharp decrease in research irradiations conducted with a Co-60 source in Building 356 during the year, as discussed in section 8.1.2, which is attributed to the COVID-19 pandemic. The 7-mrem dose to the on-site MEI is less than the dose expected from three round-trip flights from Los Angeles, California to New York, New York, and equal to about 2.3 percent of the average annual natural background in the U.S. of 311 mrem.

### 8.2.2.2 Dose Calculation: Fish Ingestion

To calculate the EDE from fish consumption, the annual intake is estimated first, which is defined at BNL as the average weight of fish consumed in a year by a Reference Person engaged in recreational fishing on the Peconic River. Based on a New York State Department of Health (NYSDOH) study, that annual consumption rate is estimated at 15 pounds (7 kg) per year (NYSDOH 1996). For each radionuclide of concern for fish samples, the dry weight activity concentration is converted to pico-Curies per gram (pCi/g) wet weight, since wet weight is the form in which fish are caught and consumed. A dose conversion factor for water or milk ingested by an adult, as listed in DOE-STD-1196-2021, Table A-1, is used for each radionuclide to convert the activity concentration to the EDE. The dose is calculated as: dose in (rem/yr) = intake (kg/yr) × activity in flesh (μCi/kg) × dose conversion factor (rem/μCi). For BNL's case, the committed dose equivalent conversion factor for Cesium-137 (Cs-137) is 5.03E-02 rem/μCi.

### 8.2.2.3 Dose Calculation: Deer Meat Ingestion

The dose calculation for deer meat ingestion is the same as for fish consumption. The same Cs-137 dose conversion factor was used to estimate dose. No other radionuclides associated



with Laboratory operations have been detected in deer meat. The total quantity of deer meat ingested during a year has been estimated by the NYSDOH at 64 pounds (29 kg) (NYSDOH 1999).

### 8.3 SOURCES: DIFFUSE, FUGITIVE, “OTHER”

Diffuse sources, also known as non-point or area sources, are described as sources of radionuclides which diffuse into the atmosphere but do not have well-defined emission points. Fugitive sources include leaks through window and door frames, as well as unintended releases to the air through vents or stacks which are supposedly inactive (i.e., leaks from vents are fugitive sources). As part of the NESHAPs review process, in addition to stack emissions, any fugitive or diffuse emission source that could potentially emit radioactive materials to the environment is evaluated. Although CERCLA-prompted actions, such as remediation projects, are exempt from procedural requirements to obtain federal, state, or local permits, any BNL activity or process with the potential to emit radioactive material must be evaluated and assessed for potential dose impact to members of the public.

#### 8.3.1 Remediation Work

In March 2021, remediation work was completed on the HFBR stack (Building 705). A NESHAPs evaluation of the levels of stack radioactivity was previously performed and confirmed again in 2020. The estimated dose resulting from demolition was found to be below the threshold for NESHAPs authorization.

Also in April 2021, the demolition of Building 650, the former Equipment Decontamination and Hot Laundry Facility, was completed. A NESHAPs evaluation was performed, and the estimate of potential offsite dose resulting from this demolition was also below the threshold for NESHAPs authorization.

## 8.4 DOSE FROM POINT SOURCES

### 8.4.1 Brookhaven LINAC Isotope Producer

Source term descriptions for point sources are given in Chapter 4. The BLIP facility is the only emission source with the potential to contribute dose to members of the public greater than one percent of the EPA limit (0.1 mrem or 1.0 $\mu$ Sv).

The BLIP facility is now considered a major emission source in accordance with the ANSI N13.1-1999 standard's graded approach, specifically a Potential Impact Category (PIC) of I. The gaseous emissions are directly and continuously measured in real time with an inline, low-resolution Sodium Iodide (NaI) gamma spectrometer. The spectrometer system is connected to a computer workstation that is used to continuously record and display emission levels. The particulate emissions are sampled for gross alpha and gross beta activity weekly, using a conventional glass-fiber filter which is analyzed at an off-site contract analytical laboratory. Likewise, exhaust samples for tritium are also collected continuously using a silica gel adsorbent which is then analyzed at an off-site contract analytical laboratory on a weekly basis.

In 2021, the BLIP facility returned to operation and was active for 36.4 weeks. Therefore, typical isotopes C-11 (half life: 20.4 minutes) and O-15 (half life: 122 seconds) were released from the BLIP facility. A small quantity (2.59E-02 Ci) of residual tritiated water vapor from activation of the targets' cooling water was released since the exhaust system ran continuously. The EDE to the MEOSI from BLIP operations was calculated to be 7.09E-1 mrem (7.09  $\mu$ Sv) in a year.

### 8.4.2 Target Processing Laboratory

In 2021, there were no detectable levels of emissions from the Target Processing Laboratory.

### 8.4.3 High Flux Beam Reactor

In 2021, the residual tritium emissions from the HFBR facility were measured at 0.259 Ci, and the estimated dose attributed was 5.68E-5 mrem (5.68E-4  $\mu$ Sv) in a year.

### 8.4.4 Brookhaven Medical Research Reactor

In 2021, the Brookhaven Medical Research Reactor (BMRR) facility remained in a cold shutdown mode as a radiological facility with institutional controls in place. There was no dose contribution from the BMRR in 2021.

### 8.4.5 Brookhaven Graphite Research Reactor

In 2021, long-term surveillance of the BGRR

**Table 8-6. Five-Year Site Dose Summary, 2021.**

	2017	2018	2019	2020	2021
<b>Pathway</b>	<b>Annual Maximally Exposed Off-Site Individual Dose, mrem</b>				
<b>Inhalation</b>					
Air	0.72	1.63	1.28	5.60E-05	0.71
<b>Ingestion</b>					
Drinking Water	None	None	None	None	None
Fish <sup>1</sup>	0.088	0.088	0.088	NS	NS
Deer	4.8	3.32	1.4	0.91	2.9
<b>All Pathways</b>	<b>5.61</b>	<b>5.04</b>	<b>2.77</b>	<b>0.91</b>	<b>3.61</b>

<b>Pathway</b>	<b>Percent of DOE 100-mrem/yr Dose Limit, %</b>				
<b>Inhalation</b>					
Air	<1.0	<2.0	<1.5	<0.001	<1.0
<b>Ingestion</b>					
Drinking Water	None	None	None	None	None
Fish <sup>1</sup>	<0.1	<0.1	<0.1	NS	NS
Deer	<5.0	<4.0	<1.5	<1.0	<3.0
<b>All Pathways</b>	<b>&lt;6.0</b>	<b>&lt;6.0</b>	<b>&lt;3.0</b>	<b>&lt;1.0</b>	<b>&lt;4.0</b>

<b>Pathway</b>	<b>Estimated Population Dose Per Year, person-rem</b>				
<b>Inhalation</b>					
Air	1.16	2.55	1.81	2.05E-03	0.77
<b>Ingestion</b>					
Drinking Water	None	None	None	None	None
Fish <sup>1</sup>	Not Tracked	Not Tracked	Not Tracked	Not Tracked	Not Tracked
Deer	Not Tracked	Not Tracked	Not Tracked	Not Tracked	Not Tracked
<b>All Pathways</b>	<b>1.16</b>	<b>2.55</b>	<b>1.81</b>	<b>2.05E-03</b>	<b>0.77</b>

Note:

1 - Source River remained dried up in 2021, so no fish data was available to represent magnitude since sampling was not possible in 2021.

continued, as well as the maintenance and periodic refurbishment of structures, systems, and components. This status will continue throughout the period of radioactive decay. There were no radionuclides released to the environment from the complex in 2021.

**8.4.6 Waste Management Facility**

In 2021, there were no detectable levels of emissions from the Waste Management Facility.

**8.4.7 Unplanned Releases**

In 2021, there were no unplanned releases.

**8.5 DOSE FROM INGESTION**

Radionuclides in the environment may bioaccumulate in deer and fish tissue, bones, and organs. Consequently, samples collected from deer and fish are analyzed to evaluate the contribution of dose to humans from the ingestion pathway. As discussed in Chapter 6, deer meat samples collected on- and off-site near the BNL boundary were used to assess the potential dose impact to the MEOSI. The maximum tissue concentration in the deer meat collected for sampling was used to calculate the potential dose to the MEOSI. Potassium-40 (K-40) and Cs-137 were detected in the

**Table 8-7. Five-Year Annual Maximally Exposed Onsite Individual Dose (2017-2021).**

TLD #	Location	Annual Total, mrem				
		2017	2018	2019	2020	2021
TK154	2nd Floor, B120	8	14	25	27	3
TK155	1st Floor, B120	2	5	20	18	7

tissue samples, but K-40 is a naturally occurring radionuclide unrelated to BNL operations.

In 2021, BNL collected samples from 19 deer, 14 of those from a managed cull, and analyzed them for K-40 and Cs-137. It should be noted that, since the site boundaries are not fenced, deer are able to travel back and forth across the site boundary, so the sample data is gathered from the entire aggregate of sample analyses. From Table 6-2, the average K-40 concentration in all deer tissue samples (All Samples) was  $2.87 \pm 0.55$  pCi/g (wet weight) in the flesh (i.e., meat) and  $2.29 \pm 0.23$  pCi/g (wet weight) in the liver. The average flesh K-40 concentration in culled deer tissue samples (Managed Cull) was  $1.88 \pm 0.62$  pCi/g (wet weight). The average liver K-40 concentration in culled deer tissue samples (Managed Cull) was  $2.14 \pm 0.19$  pCi/g (wet weight). The maximum Cs-137 flesh concentration in all samples on site (non-culled and culled) was  $1.99 \pm 0.03$  pCi/g (wet weight). This Cs-137 flesh concentration was used for MEOSI dose calculations. Therefore, the maximum estimated dose to humans from consuming deer meat containing the maximum Cs-137 concentration was estimated to be 2.90 mrem (29.0  $\mu$ Sv) in a year. This dose is below the health advisory limit of 10 mrem (100  $\mu$ Sv) established by NYSDOH.

The Laboratory maintains an ongoing program of collecting and analyzing fish from the on-site portions of the Peconic River and surrounding freshwater bodies. However, the Peconic River is an intermittent stream, with flow occurring predominantly via groundwater discharge in the Spring and Fall (i.e., a “gaining” stream) and completely drying up during dry periods (i.e., a “losing” stream). In 2021, the Peconic River did not have sufficient water to support fish populations, therefore there was no dose attributable to BNL legacy Cs-137 levels in fish in the Peconic River.

## 8.6 DOSE TO AQUATIC AND TERRESTRIAL BIOTA

DOE-STD-1153-2019, A Graded Approach for Evaluating Radiation Doses to Aquatic and Terrestrial Biota, provides the guidelines for screening methods to estimate radiological doses to aquatic animals and terrestrial plants and animals using site-specific environmental surveillance data. The RESRAD-BIOTA 1.8, Biota Dose Level 2, computer program was used to evaluate compliance with the requirements for protection of biota specified in DOE Order 458.1, Radiation Protection of the Public and the Environment.

In 2021, the terrestrial animal and plant doses were evaluated based on  $0.27 \pm 0.07$  pCi/g of Cs-137 (see Table 6-3) found in soil in the North end of the No-Mow Area near the Apartments, and a Strontium-90 (Sr-90) concentration of  $0.31 \pm 0.03$  pCi/L (see Table 5-5) in the surface water collected from the HY station West of the RHIC ring. The resultant dose to terrestrial animals was calculated as 13.0  $\mu$ Gy/day and to plants as 1.22  $\mu$ Gy/day. The dose to terrestrial animals was well below the biota dose limit of 1 mGy/day, and the plant dose was below the limit of 10 mGy/day for terrestrial plants.

To calculate the dose to aquatic and riparian animals in 2021, the surface water Sr-90 concentration mentioned above, 0.31 pCi/L, was used. Cs-137 was not detected in vegetation. Using these concentrations, the calculated estimate of dose to aquatic animals was  $5.75E-2$   $\mu$ Gy/day, and the dose to riparian animals was 1.11  $\mu$ Gy/day. Therefore, the dose to aquatic animals was well below the limit of 10 mGy/day, and the dose to riparian animals was also well below the 1 mGy/day limit specified by the Order.

## 8.7 DOSE FROM ALL PATHWAYS

Table 8-6 summarizes the estimated dose to

## CHAPTER 8: RADIOLOGICAL DOSE ASSESSMENT

the MEOSI from the inhalation, immersion, and ingestion pathways, the percentage of the 100-mrem annual allowable dose limit posed by the estimated MEOSI dose, by pathway, and the potential cumulative dose to the surrounding population via the inhalation pathway from the BNL site, for the years 2017 through 2021. The total dose to the MEOSI from the air and ingestion pathways was estimated to be 3.61 mrem (36.1  $\mu$ Sv). In comparison, the DOE limit on dose from all pathways is 100 mrem (1 mSv). Furthermore, the EPA regulatory limit for the air pathway is 10 mrem (0.10 mSv). The cumulative population dose from airborne emissions was 0.77 person-rem ( $7.7E-3$  person-Sv) in 2021.

In conclusion, the effective dose from all pathways due to BNL operations in 2021 was well below the DOE and EPA regulatory limits, and the ambient offsite TLD dose was within limits of normal background levels seen at the Laboratory site. The potential dose from drinking water was not estimated because most residents adjacent to the BNL site get their drinking water from the Suffolk County Water Authority rather than private wells. To put the potential dose impact into perspective, a comparison was made with estimated doses from other sources of radiation. The annual

dose from all-natural background sources and radon in the United States is approximately 311 mrem (3.11 mSv). A mammogram gives a dose of approximately 250 mrem (2.5 mSv) and a dental x-ray gives a dose of approximately 70 mrem (0.7 mSv) to an individual. Therefore, a dose of 3.61 mrem from all environmental pathways from BNL is a minute fraction of the dose from that of several routine diagnostic procedures, as well as natural background radiation.

### REFERENCES AND BIBLIOGRAPHY

- 40 CFR 61, Subpart H. National Emission Standards for Hazardous Air Pollutants. U.S. Environmental Protection Agency, Washington, DC. 1989.
- ANSI/HPS, 2011. Sampling and Monitoring Releases of Airborne Radioactive Substances from the Stacks and Ducts of Nuclear Facilities. N13.1-2011.
- DOE, 2019. A Graded Approach for Evaluation of Radiation Doses to Aquatic and Terrestrial Biota. DOESTD-1153-2019. U.S. Department of Energy, Washington, DC. February 12, 2019.
- DOE, 2021. Radiation Protection of the Public and the Environment. DOE Order 458.1. U.S. Department of Energy, Washington, DC. September 15, 2021.
- DOE, 2011. Departmental Sustainability. DOE Order 436.1. U.S. Department of Energy, Washington, DC. May 2, 2011.
- DOE, 2021. Derived Concentration Technical Standard, DOE-STD-1196-2021. U.S. Department of Energy, Washington, DC. July 2021.

# Quality Assurance



Quality Assurance is an integral part of every activity at Brookhaven National Laboratory (BNL). A comprehensive Quality Assurance/Quality Control (QA/QC) Program is in place to ensure that all environmental monitoring samples are representative, and that data are reliable and defensible. Most analyses are performed by contract laboratories that are state certified and routinely participate in independent performance testing. Quality control at the analytical laboratories is maintained through daily instrument calibration, efficiency, background checks, and testing for precision and accuracy. Data are verified and validated, as required, by project-specific quality objectives before being used to support decision making. The multilayered components of QA monitored at BNL ensure that all analytical data reported for the 2021 Site Environmental Report are reliable and of acceptable quality.

## 9.1 QUALITY PROGRAM ELEMENTS

As required by Department of Energy (DOE) Order 458.1, Radiation Protection of the Public and Environment, and DOE Order 436.1, Departmental Sustainability, BNL has established a Quality Assurance/Quality Control Program to ensure that the accuracy, precision, and reliability of environmental monitoring data are consistent with the requirements of Title 10 of the Code of Federal Regulations, Part 830, Subpart A, Quality Assurance Requirements, and DOE Order 414.1D, Quality Assurance. The responsibility for quality at BNL starts with the Laboratory Director, who approves the policies and standards of performance governing work that extends throughout the entire organization. The purpose of the BNL QA Program is to implement QA methodology throughout the various Laboratory management systems and associated processes to do the following:


- Plan and perform operations in a reliable and effective manner to minimize any impact on the environment, safety, security, and health of the staff and public.
- Standardize processes and support continual improvement.
- Enable the delivery of products and services that meet customers' requirements and expectations.
- Support an environment that facilitates scientific and operational excellence.

For environmental monitoring, QA is deployed as an integrated system of management activities. These activities involve planning, implementation, control, reporting, assessment, and continual improvement. QC activities measure each process or service against the QA standards. QA/QC practices and procedures are documented in manuals, plans, and a comprehensive set of Standard Operating Procedures (SOPs) for environmental monitoring (EM-SOPs). Staff members who must follow these procedures are required to document that they have reviewed and understand them.

The goal of the environmental monitoring and analysis QA/QC program is to ensure that results are representative and defensible, and that data are of the type and quality needed to verify protection of the public, employees, and the environment. Figure 9-1 depicts the flow of the QA/QC elements of BNL's Environmental Monitoring Program and indicates the sections of this chapter that discuss each element in more detail.

Laboratory environmental personnel determine sampling requirements using the Environmental Protection Agency (EPA) Data Quality Objective (DQO) process (EPA 2006), or its equivalent. During this process, the project manager for each environmental program determines the type, amount, and quality of data needed to support decision making, legal requirements, and



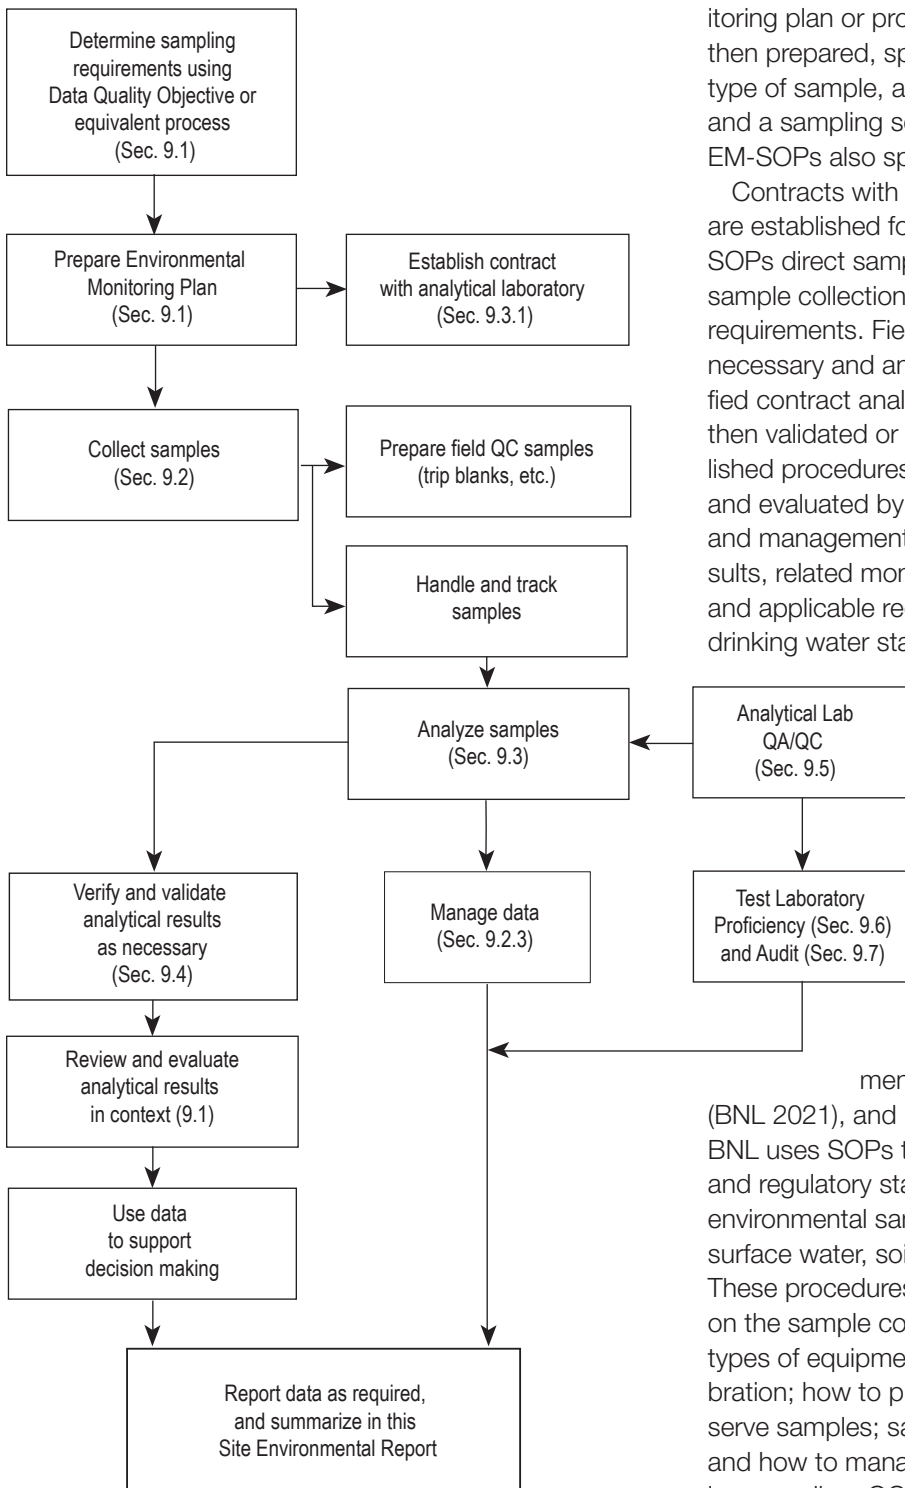

stakeholder expectations. An environmental monitoring plan or project-specific sampling plan is then prepared, specifying the location, frequency, type of sample, analytical methods to be used, and a sampling schedule. These plans and the EM-SOPs also specify data acceptance criteria.

Contracts with off-site analytical laboratories are established for sampling analysis. The EM-SOPs direct sampling technicians on proper sample collection, preservation, and handling requirements. Field QC samples are prepared as necessary and analyzed in the field or at a certified contract analytical laboratory. The results are then validated or verified in accordance with published procedures. Finally, the data are reviewed and evaluated by environmental professionals and management in the context of expected results, related monitoring results, historical data, and applicable regulatory requirements (e.g., drinking water standards, permit limits, etc.).

The data are used to support decision making, reported as required, and summarized in this annual report.

### 9.2 SAMPLE COLLECTION AND HANDLING

In 2021, environmental monitoring samples were collected, as specified, by EM-SOPs, the BNL Environmental Monitoring Plan Update (BNL 2021), and project-specific work plans. BNL uses SOPs that are consistent with industry and regulatory standards for the collection of environmental samples, including groundwater, surface water, soil, sediment, air, flora, and fauna. These procedures contain detailed information on the sample collection process, including: what types of equipment to use and equipment calibration; how to properly collect, handle, and preserve samples; sample handling and shipment; and how to manage any wastes generated during sampling. QC checks of sampling processes include the collection of field duplicates, matrix spike samples, field blanks, trip blanks, and equipment blanks.

Figure 9-1. Flow of Environmental Monitoring QA/QC Program Elements.

### 9.2.1 Field Sample Handling

To ensure the integrity of samples, chain-of-custody (COC) was maintained and documented for all samples collected in 2021. A sample is considered to be in the custody of a person if any or all of the following rules of custody are met:

1. The person has physical possession of the sample,
  2. The sample remains in view of the person after being in possession,
  3. The sample is placed in a secure location by the custody holder, or
  4. The sample is in a designated secure area.
- These procedures are outlined in EM-SOP 109, "Chain-of-Custody, Storage, Packaging, and Shipment of Samples" (BNL 2020).

#### 9.2.1.1 Custody and Documentation

Field sampling technicians are responsible for the care and custody of samples until they are transferred to a receiving group or contract analytical laboratory. Samples requiring refrigeration are placed immediately into a refrigerator or a cooler with cooling media and are kept under custody rules. The technician signs the COC form when relinquishing custody and contract analytical laboratory personnel sign the COC form when accepting custody.

As required by EM-SOP-201, "Documentation of Field Activities" (BNL 2019), field sampling technicians are also required to maintain bound, weatherproof field logbooks and electronic tablets, which are used to record sample ID numbers, collection times, descriptions, collection methods, and COC numbers. Daily weather conditions, field measurements, and other appropriate site-specific observations also are recorded in the logbooks.

#### 9.2.1.2 Preservation and Shipment

Before sample collection, field sampling technicians prepare all bottle labels and affix them to the appropriate containers, as defined in the applicable EM-SOPs. Appropriate chemical preservatives are added to the containers before or immediately after collection, and samples are refrigerated as necessary. Sample preservation is maintained, as required, throughout the shipping of the samples to the analytical laboratory.

If samples are sent via commercial carrier, a bill-of-lading is used. COC seals are placed on the shipping containers and their intact status upon receipt indicates that custody was maintained during shipment.

Upon receipt of the samples, the contract laboratory verifies that proper preservation requirements have been met. BNL is notified as soon as practical if a sample arrives unpreserved, improperly preserved, or at the wrong temperature.

Sample preservations, including incorrect preservation, are noted on the sign-in documentation, and included with every data package. If the BNL Project Manager, with the help of a QC chemist and/or radiochemist, determines that an incorrect preservation issue would result in data that does not meet the data quality objectives of the project, the analysis would be cancelled.

### 9.2.2 Field Quality Control Samples

Field QC samples collected for the environmental monitoring program include equipment blanks, trip blanks, field blanks, field duplicate samples, and matrix spike/matrix spike duplicate samples. The rationale for selecting specific field QC samples, and minimum requirements for their use in the Environmental Monitoring Program, are provided in the BNL EM-SOP 200 series, "Quality Assurance." Field blanks and trip blanks were collected for all appropriate media in 2021.

An equipment blank is a volume of solution (in this case, laboratory-grade water) that is used to rinse a sampling tool after decontamination. The rinse water is collected and tested to verify that the sampling tool is not contaminated. Equipment blank samples are collected, as needed, to verify the effectiveness of the decontamination procedures on non-dedicated or reusable sampling equipment.

A trip blank is provided with each shipping container of samples to be analyzed for volatile organic compounds (VOC). The use of trip blanks provides a way to determine whether contamination of a sample container occurred during shipment from the manufacturer, while the container was in storage, during shipment to a contract analytical laboratory, or during analysis of a sample at a contract analytical laboratory. Trip blanks consist of an aliquot of laboratory-grade water

sealed in a sample bottle, usually prepared by the contract analytical laboratory prior to shipping the sample bottles to BNL. If trip blanks are not provided by the contract analytical laboratory, then field sampling technicians prepare trip blanks before they collect the samples. Trip blanks were included with all shipments of aqueous samples for VOC analysis in 2021.

Field blanks are collected to check for cross-contamination that may occur during sample collection. A field blank consists of an aliquot of laboratory-grade water that is poured into a sample container in the field. For the Groundwater Monitoring Program, one field blank is collected for every 20 samples, or one per sampling round, whichever is more frequent. Field blanks are analyzed for the same parameters as groundwater samples. A Field Reagent Blank (FRB) is collected when analyzing for Perfluorinated Alkyl Acids (PFAS). The FRB must use the same preservative as the samples. The FRB is handled the same way as a Field Blank. For other programs, the frequency of field blank collection is based on their specific DQOs.

In 2021, the most common contaminant detected in the trip, field, and equipment blanks was trace to low levels of styrene (Table 9-1). This compound is likely due to minor laboratory contamination and does not pose significant problems with the reliability of the analytical results. Several other compounds were also detected, such as methylene chloride and naphthalene at low levels. When these contaminants are detected, validation or verification procedures are used, where applicable, to qualify the associated data as “nondetects” (see Section 9.4). No contamination was detected in the FRBs during 2021. The results from blank samples collected during 2021 did not indicate any significant impact on the quality of the results.

Field duplicate samples are analyzed to check the reproducibility of sampling and analytical results, based on EPA Region II guidelines (EPA 2012, 2013). For example, in the Groundwater Monitoring Program, duplicates are collected for five percent of the total number of samples collected for a project per sampling round.

During 2021, a total of 54 duplicate samples were collected for non-radiological analyses and

43 duplicates were collected for radiologic analyses. Not all parameters were analyzed in every duplicate. The parameters in each duplicate were consistent with those required for the specific program the duplicate was monitoring. Of the 2,772 non-radiologic parameters analyzed, 121 parameters (four percent) were above 50 percent Relative Percent Difference. For the radiologic parameters, 31 of the 291 parameters (10.6 percent) failed to meet criteria. These results are indicative of analytical method consistency within the laboratory, and that consistency within the sample collection process results in valid, reproducible data.

Matrix spike and matrix spike duplicates are used to determine whether the sample matrix (e.g., water, soil, air, vegetation, bone, or oil) adversely affected the sample analysis. A spike is a known amount of analyte added to a sample. Matrix spikes are performed at a rate specified by each environmental program’s DQOs. The rate is typically one per 20 samples collected per project. No significant matrix effects were observed in 2021 for routine matrices such as water and soil. Non-routine matrices, such as oil, exhibited the expected matrix issues.

### 9.2.3 Tracking and Data Management

Most environmental monitoring samples and analytical results were tracked in BNL’s Environmental Information Management System (EIMS), a database system used to store, manage, verify, protect, retrieve, and archive BNL’s environmental data. A small number of environmental samples that were not tracked in the EIMS were analyzed at a contract analytical laboratory (Chemtex Lab) that does not produce the electronic data deliverable package needed to enter the data into the EIMS. Tracking is initiated when a sample is recorded on a COC form. Copies of the COC forms and supplemental forms are provided to the project manager or the sample coordinator and forwarded to the data coordinator to be entered into the EIMS. Each contract analytical laboratory also maintains its own internal sample tracking system (also known as a Laboratory Information Management System).

Following sample analysis, the contract analytical laboratory sends the results to the BNL

chemist and project manager for initial review. When required by project specific DQOs, the analytical data may also be sent to a BNL contract chemist for full data validation. Once results of the analyses are determined to be complete and of acceptable quality, the data are entered into the EIMS. Once entered into EIMS, reports can be generated using a web-based data query tool.

### 9.3 SAMPLE ANALYSIS

In 2021, environmental samples were analyzed by six contract analytical laboratories, whose selection is discussed in Section 9.3.1. All samples were analyzed according to EPA-approved methods or by standard industry methods where no EPA methods are available (e.g., for tolyltriazole). In addition, field sampling technicians performed field monitoring for parameters such as conductivity, dissolved oxygen, pH, temperature, and turbidity.

#### 9.3.1 Qualifications

BNL used the following six contract analytical laboratories for analysis of environmental samples in 2021:

1. American Radiation Services (ARS) in Port Allen, Louisiana, for radiological analytes
2. Chemtex Lab in Port Arthur, Texas, for select nonradiological analytes
3. General Engineering Lab (GEL) in Charleston, South Carolina, for radiological and nonradiological analytes
4. PACE Lab in Melville, New York, for nonradiological analytes
5. Test America (TA), based in St. Louis, Missouri, for radiological and nonradiological analytes
6. Eberline Analytical in Oak Ridge, Tennessee, for radiological analytes

The process of selecting contract analytical laboratories involves the following factors:

- Maintaining required New York State Department of Health (NYSDOH) certifications for the specific analyses to be performed, as applicable;
- Their record on performance evaluation (PE) tests;
- Their contract with the DOE Integrated Contract Procurement Team;
- Pre-selection bidding; and

- Adherence to their own QA/QC programs, which must be documented and provided to BNL.

Routine QC procedures that laboratories must follow, as discussed in Section 9.5, include daily instrument calibrations, efficiency and background checks, and standard tests for precision and accuracy. Five of the six laboratories contracted by BNL in 2021 were certified by the NYSDOH for the relevant analytes, where such certification existed. NYSDOH does not currently certify for the specific analytes tested by Chemtex Lab (e.g., tolyltriazole), which has Texas National Environmental Laboratory Accreditation Program (NELAP) accreditation. The laboratories also were subject to PE testing and DOE-sponsored audits (see Section 9.7).

### 9.4 VERIFICATION AND VALIDATION OF ANALYTICAL RESULTS

Environmental monitoring data are subject to data verification and, in certain cases, data validation when the data quality objectives of the project require this step.

The data verification process involves checking for common errors associated with analytical data. The following criteria can cause data to be rejected during the data verification process:

- *Holding time missed* – The analysis was not initiated, or the sample was not extracted, within the time frame required by EPA or by the contract.
- *Incorrect test method* – The analysis was not performed according to a method required by the contract.
- *Poor recovery* – The compounds or radioisotopes added to the sample before laboratory processing were not recovered at the recovery ratio required by the applicable analytical method/performance criteria.
- *Insufficient QA/QC data* – Supporting data received from the contract analytical laboratory were insufficient to allow for the verification or validation of results.
- *Incorrect minimum detection limit (MDL)* – The contract analytical laboratory reported extremely low levels of analytes as “less than minimum detectable,” but the contractually required limit is not used.

Table 9-1. Summary of Detections in Trip and Field Blank Samples.

Constituent	Number of Analyses	Number of Detects	Minimum	Maximum	Typical Reporting Limit	Units
<b>Trip Blank Results</b>						
Styrene	86	13	0.12	0.4	0.5	µg/L
Methylene chloride	89	6	0.55	1.25	0.5	µg/L
Methyl chloride	89	1	0.43	0.43	0.5	µg/L
Naphthalene	86	1	0.19	0.19	0.5	µg/L
Tetrachloroethylene	89	1	0.51	0.51	0.5	µg/L
Trichloroethylene	89	1	0.18	0.18	0.5	µg/L
<b>Field Blank Results</b>						
<b>Organic Compounds</b>						
2-Chloronaphthalene	2	1	0.47	0.47	10	µg/L
Naphthalene	25	1	0.42	0.42	0.5	µg/L
Styrene	23	1	0.18	0.18	0.5	µg/L
<b>Metals</b>						
Calcium	3	1	69.1	69.1	50	µg/L
Lead	4	1	11.3	11.3	0.5	µg/L
Zinc	4	3	47.6	67.7	3.3	µg/L
Arsenic	4	1	2.08	2.08	2	µg/L
Selenium	4	1	13.6	13.6	1.5	µg/L
Sodium	3	1	101	101	100	µg/L
<b>General Chemistry Parameters</b>						
Alkalinity (as CaCO <sub>3</sub> )	4	3	47.6	67.7	3.3	mg/L
Ammonia (as N)	2	1	0.0502	0.0502	0.017	mg/L

µg/L Micrograms per liter.

mg/L Milligrams per liter.

- *Invalid chain-of-custody* – There was a failure to maintain proper custody of samples as documented on COC forms.
- *Instrument failure* – The instrument did not perform correctly.
- *Preservation requirements not met* – The requirements identified by the specific analytical method were not met or properly documented.
- *Contamination of samples from outside sources* – Possible sources include sampling equipment, personnel, and the contract analytical laboratory.
- *Matrix interference* – Analysis was affected by dissolved inorganic/organic materials in the matrix.

Data validation involves a more extensive process than data verification. Validation includes all the verification checks, as well as checks for less common errors, including instrument calibration that was not conducted as required, internal standard errors, transcription errors, and calculation errors. The amount of data checked varies, depending on the environmental media and on the DQOs for each project. Data for some projects, such as long-term groundwater monitoring, may require only verification.

The results of the verification or validation process are entered into the EIMS. When analyses are determined to be outside of QC parameters, a qualifier is applied to the result stored in the EIMS. Results that have been rejected are



qualified with an “R.” Rejected results are not used in the preparation of this report.

The most common QC issue during 2021 was the detection of low-level contamination of trip, field, and method blanks used in VOC analyses. Results for the trip and field blanks are summarized in Table 9-1. This issue resulted in minor qualification of sample results. Also, minor violations of laboratory control sample results were also common. In most cases, the violations do not result in qualified sample results. Furthermore, during 2021, 29 samples sent for VOC analysis were analyzed outside technical holding times due to laboratory instrument failures. As a result, the analytical data were rejected due to the holding time exceedances, and BNL had to provide new samples for analysis. The contract laboratory has since implemented procedures to prevent impacts from instrument failures.

#### 9.4.1 Checking Results

Nonradiological data analyzed in 2021 were verified and/or validated when required by project DQOs, BNL EM-SOPs, and/or EPA contract laboratory program guidelines (EPA 2012, EPA 2013). Radiological packages were verified and validated using BNL and DOE guidance documents (BNL 2017). During 2021, the verifications were conducted using a combination of manually checking data packages and by the use of a computer program developed by BNL to verify the completeness of the electronic data deliverable (EDD) before the data are entered into BNL’s EIMS.

### 9.5 CONTRACT ANALYTICAL LABORATORY QA/QC

In 2021, procedures for calibrating instruments, analyzing samples, and assessing QC were consistent with EPA methodology. QC checks performed included: analyzing blanks and instrument background; using Amersham Radiopharmaceutical Company or National Institute for Standards and Technology (NIST) traceable standards; and analyzing reference standards, spiked samples, and duplicate samples. Analytical laboratory contracts specify analytes, methods, required detection limits, and deliverables, which include standard batch QA/QC performance checks. As part of the laboratory selection process,

candidate laboratories are required to provide BNL with copies of their QA/QC manuals and QA program plans.

When discrepancies were found in field sampling designs, documented procedures, COC forms, data analyses, data processing systems, and QA software, or when failures in PE testing occur, nonconformance reports are generated. Following investigation into the root causes, corrective actions are taken and tracked to closure.


### 9.6 PERFORMANCE OR PROFICIENCY EVALUATIONS

Four of the contract analytical laboratories (Eberline, GEL, PACE, and TA) participated in several national and state PE testing programs in 2021. Chemtex Lab did not participate in PE testing because there is no testing program for the specific analytes Chemtex analyzed for BNL (specifically for tolyltriazole, polypropylene glycol monobutyl ether, and 1,1-hydroxyethylidene diphosphonic acid). Each of the participating laboratories took part in at least one testing program, and several laboratories participated in multiple programs. Results of the tests provide information on the quality of a laboratory’s analytical capabilities. The testing was conducted by Environmental Resource Associates (ERA), the DOE Mixed Analyte Performance Evaluation Program (MAPEP), Resource Technology Corporation, Phenova, and the NYSDOH Environmental Laboratory Accreditation Program (ELAP). The results from these tests are summarized in Section 9.6.1.

#### 9.6.1 Summary of Test Results


As shown by Figures 9-2 and 9-3, test results are plotted as percentage scores that were “Acceptable,” “Warning (But Acceptable),” or “Not Acceptable.” A Warning (But Acceptable) is considered by the testing organization to be “satisfactory.” An “Average Overall Satisfactory” score is the sum of results rated as Acceptable and those rated as Warning (But Acceptable), divided by the total number of results reported. A Not Acceptable rating reflects a result that is greater than three standard deviations from the known value—a criterion set by the independent testing organizations.

CHAPTER 9: QUALITY ASSURANCE

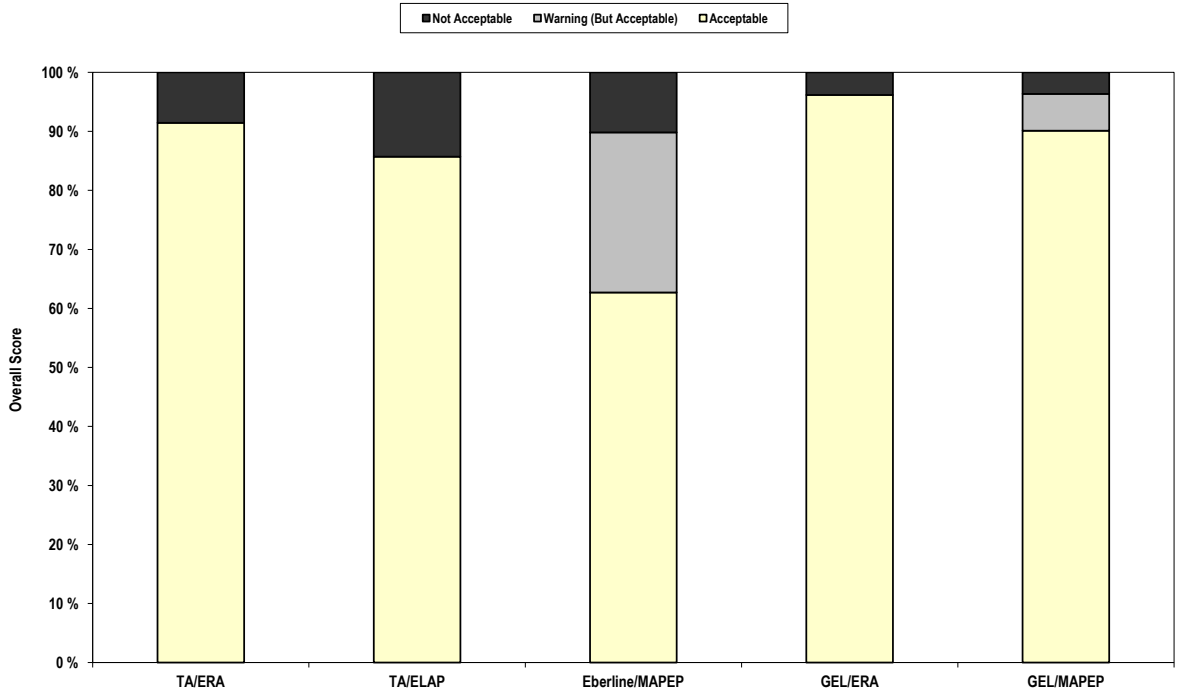

Note that the Acceptable scores and the Warning (But Acceptable) scores combined constitute the "overall satisfactory" category referred to in the text of this chapter.

**Figure 9-2. Summary of Scores in the Radiological Proficiency Evaluation Programs.**

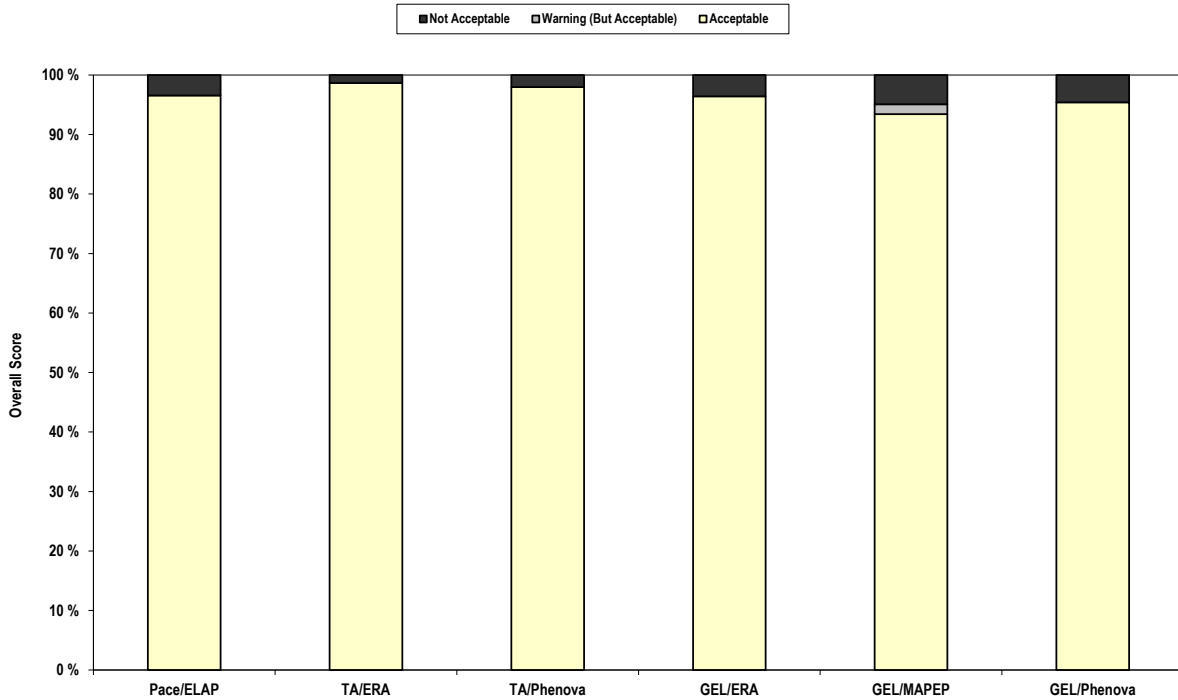

Note that the Acceptable scores and the Warning (But Acceptable) scores combined constitute the "overall satisfactory" category referred to in the text of this chapter.

**Figure 9-3. Summary of Scores in the Nonradiological Proficiency Evaluation Programs.**

Table 9-2. Summary Results of 2021 DOECAP Audits

Laboratory	Finding Priority	Area of Concentration	Number of Findings
<b>Test America, Earth City, Missouri</b>			
	I	Radiochemistry	NA
	I	Quality Assurance	NA
	I	Organic Analyses	NA
	I	Inorganic Analyses and Wet Chemistry	NA
	II	Radiochemistry	1
	II	Materials Management	2
<b>GEL Laboratories</b>			
	II	Quality Assurance	6
	II	Inorganic Analyses and Wet Chemistry	2
	II	Radiochemistry	4
	II	Materials Management	1
<b>Eberline Analytical</b>			
	I	Radiochemistry	NA
	II	Quality Assurance	5
	I	Organic Analyses	NA
	I	Inorganic Analyses and Wet Chemistry	NA
	I	Laboratory Information Management Systems	NA
	I	Materials Management	NA

Table 9-2 provides a summary of the DOECAP audit results. TA had three Priority II findings, Eberline had five Priority II findings, and GEL had 13 Priority II findings. Priority II findings are deviations from a requirement.

#### 9.6.1.1 Radiological Assessments

Figure 9-2 summarizes radiological performance scores in the ERA, ELAP, and MAPEP programs. GEL and TA participated in the ERA radiological PE studies with GEL having an average overall score of 96 percent. TA also had an overall score of 91 percent. TA scored 86 percent in the ELAP program. GEL and Eberline scored 90 percent and 63 percent, respectively, in the MAPEP program.

#### 9.6.1.2 Nonradiological Assessments

Figure 9-3 summarizes the non-radiological performance results of three participating laboratories (GEL, Pace, and TA) in the ERA, MAPEP, Phenova, and ELAP tests. During 2021, PACE participated in the NYSDOH ELAP evaluations

of performance on tests of nonpotable water, potable water, and solid wastes. NYSDOH found 96 percent of PACE's nonradiological tests to be in the Acceptable range. GEL participated in the ERA, MAPEP, and Phenova programs for nonpotable water, potable water, and solid wastes and received scores of 96 percent, 93 percent, and 95 percent, respectively. TA participated in the ERA and Phenova programs for nonpotable water, potable water, and solid wastes with scores of 99 percent and 98 percent, respectively.

## 9.7 AUDITS

As part of DOE's Consolidated Audit Program (DOECAP), TA was audited in December 2020 (ANAB 2020) by ANSI-ASQ National Accreditation Board (ANAB). During the audits, three nonconformities were cited. In all instances concerning parameters required by BNL, these findings did not affect BNL data.

Eberline was assessed by Perry Johnson Laboratory Accreditation (PJLA) and approval was given in March 2019 (PJLA 2019). GEL was assessed

## CHAPTER 9: QUALITY ASSURANCE

during March-April 2021 by ANSI-ASQ National Accreditation Board (ANAB 2021). During the audits, a number of nonconformities were cited. In all instances concerning parameters required by BNL, these findings did not affect BNL data.

Based on the audit and assessments, the analytical laboratories met the criteria of the audit programs for Acceptable status.

### 9.8 CONCLUSION

The data validations, data verifications, and DQO checks conducted on analytical results at BNL are designed to eliminate any data that fails to meet the DQO of each project. The results of the independent PE assessments and assessments of contractor laboratories summarized in this report are also used to assess the quality of the results. Therefore, the data used in this Site Environmental Report are of acceptable quality.

### REFERENCES AND BIBLIOGRAPHY

- 10CFR 830 Subpart A. U.S. Department of Energy. Quality Assurance Requirements. U.S. Code of Federal Regulations. 2000.
- BNL 2017. EM-SOP 209. Radiochemical Data Validation. Brookhaven National Laboratory, Upton, NY.
- BNL 2019. EMSOP-201 Documentation of Field Activities. Brookhaven National Laboratory, Upton, NY.
- BNL 2020. EM-SOP 109. Chain-of-Custody, Storage, Packaging, and Shipment of Samples. Brookhaven National Laboratory. Upton, NY.
- BNL 2020. Brookhaven National Laboratory Environmental Monitoring Plan Update. Brookhaven National Laboratory, Upton, NY. January 2020.
- DOE Order 414.1D. Quality Assurance. U.S. Department of Energy. Washington, DC. August 16, 2011.
- DOE Order 436.1. Departmental Sustainability. U.S. Department of Energy, Washington, DC. May 2, 2011.
- DOE Order 458.1. Radiation Protection of the Public and Environment. U.S. Department of Energy. Washington, DC. February 11, 2011.
- ANAB 2020. 2020 DOECAP Accreditation Program Assessment Report for Eurofins TestAmerica Laboratories, Inc.-Earth City/St. Louis, MO, December 2020
- PJLA 2019. Certificate of Accreditation: Supplement, Eberline Analytical-Oak Ridge Laboratory, March 2019
- ANAB 2021. 2021 DOECAP Accreditation Program Assessment Report GEL Laboratories, LLC. -Charleston, South Carolina, April 2021

APPENDIX A: GLOSSARY

## Acronyms and Abbreviations

These acronyms and abbreviations reflect the typical manner in which terms are used for this specific document and may not apply to all situations. Items with an asterisk (\*) are described in the glossary of technical terms, which follows this list.

AEC	Atomic Energy Commission	Cf-252	californium-252
AFV	Alternative Fuel Vehicles	CFC-11	chlorofluorocarbon an ozone- depleting refrigerant
AGS	Alternating Gradient Synchrotron	<i>cfm, cfs</i>	cubic feet per minute, per second
ALARA*	"As Low As Reasonably Achievable"	CFN	Center for Functional Nanomaterials
AMSL	above mean sea level	CFR	U.S. Code of Federal Regulations
AMU	atomic mass unit	CHP	combined heat and power
AOC*	area of concern	Ci*	curie
APG	Analytical Products Group	CO COC*	certificate to operate chain-of-custody
ARARs	Applicable, Relevant, and Appropriate Requirements	CRM	Cultural Resource Management
ARPA*	Archeological Resource Protection Act	CRMP	Cultural Resource Management Plan
ARRA	American Recovery and Reinvestment Act	Cs	cesium
AS/SVE*	air sparging/soil vapor extraction	CSF	Central Steam Facility
AST	aboveground storage tank	CSI	Computational Science Initiative
ATF	Accelerator Test Facility	CTN	Center for Transitional Neuroimaging
AWQS	Ambient Water Quality Standards	CVO	Contractor Vendor Orientation
BAF	Booster Applications Facility	CWA*	Clean Water Act
BGD	belowground duct	CY	calendar year
BGEPA	Bald and Golden Eagle Protection Act	D2O*	heavy water
BGRR	Brookhaven Graphite Research Reactor	DAC	Derived Air Concentration
BHSO	DOE Brookhaven Site Office	DCA	1,1-dichloroethane
BLIP	Brookhaven Linac Isotope Producer	DCE	1,1-dichloroethylene
BMRR	Brookhaven Medical Research Reactor	DCG*	derived concentration guide
BNL	Brookhaven National Laboratory	D&D	decontamination and decommissioning
BOD*	biochemical oxygen demand	DDD	dichlorodiphenyldichloroethane
Bq*	becquerel	DDE	dichlorodiphenyldichloroethylene
Bq/g	becquerel per gram	DDT	dichlorodiphenyltrichloroethane
Bq/L	becquerel per liter	DMR	Discharge Monitoring Report
BRAHMS	Broad Range Hadron Magnetic Spectrometer	DOE*	U.S. Department of Energy
BSA	Brookhaven Science Associates	DOE CH	DOE Chicago Operations Office
Btu	British thermal units	DQO	Data Quality Objective
CAA*	Clean Air Act	DSA	Documented Safety Analysis
CAAA*	CAA Amendments (1990)	DSB	Duct Service Building
CAC	Community Advisory Council	DUV – FEL	Deep UltraViolet – Free Electron Laser
CAFE	Corporate Average Fuel Economy	DWS	Drinking Water Standards
CAP	Clean Air Act Assessment Package	EA*	Environmental Assessment
CBS	chemical bulk storage	EBIS	Electron Beam Ion Source
CCR	Consumer Confidence Report	ECM	Energy Conservation Measures
CCWF	Central Chilled Water Facility	EDB*	ethylene dibromide
CEDR	Consolidated Energy Data Report	EDE*	Effective Dose Equivalent
CEMS	continuous emission monitoring systems	EDTA	ethylenediaminetetraacetic acid
CERCLA*	Comprehensive Environmental Response, Compensation and Liability Act	EE/CA	Engineering Evaluation/Cost Analysis
		EE-IOCPA	Energy Employees Occupational Illness Compensation Program Act



## APPENDIX A: GLOSSARY

EIMS*	Environmental Information Management System	gge	gas gallon equivalent
EISA	Energy Independence and Security Act	GHG	Greenhouse Gas
ELAP	Environmental Laboratory Approval Program	GIS	Geographical Information System
EML	Environmental Measurements Laboratory	GPG	Groundwater Protection Group
EMP	Environmental Monitoring Plan	GSA	US General Services Administration
EMS*	Environmental Management System	GSF	gross square feet
EO	Executive Order	GWh	gigawatt hour
EPA*	U.S. Environmental Protection Agency	GWP	Global warming potential
EPCRA*	Emergency Planning and Community Right-to-Know Act	HEPA	high efficiency particulate air
EPEAT	Electronic Product Environmental Assessment Tool	HFBR	High Flux Beam Reactor
EPD	Environmental Protection Division	HFCs	Hydrofluorocarbons
EPP	Environmentally Preferable Purchasing	HITL	Heavy Ion Transfer Line
ERP	Environmental Restoration Projects	HPRS	Health Physics Reporting System
ERA	Environmental Resource Associates	HPSB	High Performance and Sustainable Buildings
ERD	Environmental Restoration Division	HSS	Health, Safety and Security
ES*	environmental surveillance	HTO	tritiated water (liquid or vapor)
ESF	SUNY School of Environmental Science and Forestry	HVAC	heating/ventilation/air conditioning
ESPC	Energy Savings Performance Contract	HWMF	Hazardous Waste Management Facility
ESR	Experimental Safety Review	I	Iodine
ES&H	Environment, Safety, and Health	IAEA	International Atomic Energy Agency
ESA*	Endangered Species Act	IAG	Interagency Agreement
ESH&Q	Environment, Safety, Health, and Quality Directorate	IC	ion chromatography
ESPC	Energy Savings Performance Contract	ICP/MS	inductively coupled plasma/mass spectrometry
ESSH	Environmental Safety, Security and Health	IGA	Investment Grade Audit
FaST	Facility and Student Teams Program	ILA	industrial, landscaping, and agricultural
FAMS	Facility area monitors	IPM	Integrated Pest Management
FCA	Facility Condition Assessment	ISB	Interdisciplinary Science Building
FCM	Facility Complex Manager	ISMS	Integrated Safety Management System
FEMP	Federal Emergency Management Program	ISO*	International Organization for Standardization
FERN	Foundation for Ecological Research in the Northeast	K	potassium
FFCA*	Federal Facilities Compliance Act	kBq	kilobecquerels (1,000 Bq)
FFA	Federal Facilities Agreement	KeV	kilo (thousand) electron volts
FHWMF	Former Hazardous Waste Management Facility	Kr	kryptonite
FIFRA*	Federal Insecticide, Fungicide, and Rodenticide Act	kwH	kilowatt hours
FM	Facility Monitoring	LDR	Land Disposal Restriction
FPM	Facility Project Manager	LED	light emitting diode
FRP	Facility Response Plan	LEED	Leadership in Energy and Environmental Design
FWS*	U.S. Fish & Wildlife Service	LIE	Long Island Expressway
FY	fiscal year	LIMS	Laboratory Information Management System
GBq	giga (billion or E+09) becquerel	Linac	Linear Accelerator
GAB	gross alpha and beta	LIPA	Long Island Power Authority
GC/ECD	gas chromatography/electron capture detector	LISF	Long Island Solar Farm
GC/MS	gas chromatography/mass spectrometry	LTRA	Long Term Remedial Action
GDS	Groundwater Discharge Standard	mA	milli-amperes
GEL	General Engineering Laboratory, LLC	M&V	Measurement and Verification
GeV	giga (billion) electron volts	MACT	Maximum Available Control Technology
		MAPEP	Mixed Analyte Performance Evaluation Program
		MAR	Materials-at-risk
		MBTA	Migratory Bird Treaty Act
		MCL	maximum contaminant level

APPENDIX A: GLOSSARY

MDL*	minimum detection limit	NSPS	new source performance standards
MEG	Miller Environmental Group	NSRC	Nanoscale Science Research Centers
MEI*	maximally exposed individual	NSRL	NASA Space Radiation Laboratory
MEOSI	maximally exposed off-site individual	NT	not tested
MeV	million electron volts	NTS	Nevada Test Site
MGD	million gallons per day	NYCRR*	New York Codes, Rules, and Regulations
mg/L	milligrams per liter	NYISO	New York Independent System Operator
MMBtu	million British thermal units	NYPA	New York Power Authority
MOA	Memorandum of Agreement	NYS	New York State
MOU	Memorandum of Understanding	NYSDEC	NYS Department of Environmental Conservation
MPF	Major Petroleum Facility	NYSDOH	NYS Department of Health
MPN	most probable number	NYSHPO	NYS Historic Preservation Office
MPO	Modernization Project Office	O <sub>3</sub> *	ozone
mrem	milli (thousandth of a) rem	O&M	Operation and Maintenance
MRC	Medical Research Center	ODS	ozone-depleting substances
MRI	Magnetic Resonance Imaging	OEP	Office of Education Programs
MSL*	mean sea level	OFIs	opportunities for improvement
mSv	millisievert	OHSAS	Occupational Health and Safety Assessment Series
MTBE	methyl tertiary butyl ether	OMC	Occupational Medical Clinic
MW	megawatt	ORC	oxygen-releasing compound
NA	not analyzed	ORNL	Oak Ridge National Laboratory
NCRP	National Council on Radiation Protection and Measurements	ORPS*	Occurrence Reporting and Processing System
ND	not detected	OSHA	Occupational Health and Safety Administration
NEAR	Neighbors Expecting Accountability and Remediation	OSSP	Open Space Stewardship Program
NELAC	National Environmental Laboratory Accreditation Conference	OU*	operable unit
NELAP	National Environmental Laboratory Accreditation Program	P2*	pollution prevention
NEPA*	National Environmental Policy Act	PAAA*	Price-Anderson Act Amendment
NESHAPs*	National Emission Standards for Hazardous Air Pollutants	PAF	Process Assessment Form
ng/J	nano (one-billionth) gram per Joule	Pb	lead
NHPA*	National Historic Preservation Act	PBT	persistent, bioaccumulative, and toxic
NHTSA	National Highway Traffic Safety Administration	PCBs*	polychlorinated biphenyls
NIST	National Institute for Standards and Technology	PCE	tetrachloroethylene (or perchloroethylene) pCi/g picocuries per gram
nm	nanometer	PE	performance evaluation
NNSS	Nevada National Security Site	PEMP	Performance Evaluation Management Plan
NO <sub>2</sub>	nitrogen dioxide	PET	positron emission tomography
NOV	Notice of Violation	PFCs	Perfluorocarbons
NOX*	nitrogen oxides	PIC	potential impact category
NOEC	no observable effect concentration	ppb	parts per billion
NPDES	National Pollutant Discharge Elimination System	ppm	parts per million
NR	not required	ppt	parts per trillion
NRMP	Natural Resource Management Plan	PPTRS	Pollution Prevention Tracking System
NS	not sampled	PRAP	Proposed Remedial Action Plan
NSERC	Northeast Solar Energy Research Center	PUE	Power Utilization Effectiveness
NSF-ISR	NSF-International Strategic Registrations, Ltd.	PV	photovoltaic
NSLS	National Synchrotron Light Source	QA*	quality assurance
NSLS-II	National Synchrotron Light Source II	QAPP	Quality Assurance Program Plan
		QC*	quality control
		QCU	quantum chromodynamics

## APPENDIX A: GLOSSARY

QM	Quality Management	SULI	Science Undergraduate Laboratory Internship
R-11 (etc.)	ozone-depleting refrigerant	SUNY	State University of New York
RA*	removal action	Sv*	sievert; unit for assessing radiation dose risk
RACT	Reasonably Available Control Technology	SVE*	soil vapor extraction
RATA	Relativistic accuracy test	SVOC*	semivolatile organic compound
RCA	recycled concrete aggregate	$t_{1/2}$ *	half-life
RCRA*	Resource Conservation and Recovery Act	TA	Test America
RD/RA	Remedial Design/Remedial Action	TBq	tera (trillion, or E+12) becquerel
REC	Renewable Energy Credit	TCA	1,1,1-trichloroethane
RF	resuspension factor	TCAP	Transportation Safety and Operations Compliance Assurance Process
RHIC	Relativistic Heavy Ion Collider	TCE*	trichloroethylene
ROD*	Record of Decision	TCLP	toxicity characteristic leaching procedure
RPD	relative percent difference	TEAM	Transformational Energy Action Management
RSB	Research Support Building	TED	Total Effective Dose
RWMB	Radioactive Waste Management Basis	TEDE	Total Effective Dose Equivalent
RWP	Radiological Work Permit	TKN	Total Kjeldahl nitrogen
S&M	surveillance and maintenance	TLD*	thermoluminescent dosimeter
SARA*	Superfund Amendments and Reauthorization Act	TPL	Target Processing Laboratory
SBMS*	Standards Based Management System	TRE	Toxic Reduction Evaluation
SCDHS	Suffolk County Department of Health Services	TRI	Toxic Release Inventory
SCR	Special Case Resource	TSCA*	Toxic Substances Control Act
SCR	Stakeholder and Community Relations	TTA	Tolytriazole
SCSC	Suffolk County Sanitary Code	TVDG	Tandem Van de Graaff
SDL	Source Development Laboratory	TVOC*	total volatile organic compounds
SDWA*	Safe Drinking Water Act	UESC	Utility Energy Services Contract
SER	Site Environmental Report	$\mu\text{g/L}$	micrograms per liter
SI	International System (measurement units)	UIC*	underground injection control
SNS	standard not specified	UPS	uninterrupted power supplies
SO <sub>2</sub>	sulfur dioxide	UST*	underground storage tank
SOP	standard operating procedure	VFP	Visiting Faculty Program
SPB	Southern Pine Beetle	VOC*	volatile organic compound
SPCC	Spill Prevention Control and Countermeasures	VUV*	very ultraviolet
SPDES*	State Pollutant Discharge Elimination System	WAC	waste acceptance criteria
SPO	Sustainability Performance Office	WBS	Work Breakdown Structure
SPOFOA	Sustainability Performance Office Funding Opportunity Announcement	WCPP	Waste Certification Program Plan
Sr	strontium	WCF	Waste Concentration Facility
SSP	Site Sustainability Plan	WET	Whole Effluent Toxicity
SSPP	Strategic Sustainability Performance Plan	WLA	Waste Loading Area
STAR	Solenoid Tracker at RHIC	WM	Waste Management
STEM	Scanning Transmission Electron Microscope	WMF	Waste Management Facility
STL	Sewer Trent Laboratories, Inc.	WTP	Water Treatment Plant
STP	Sewage Treatment Plant	ZEV	zero emission vehicle
SU	standard unit		

## Technical Terms

These definitions reflect the typical manner in which the terms are used for this specific document and may not apply to all situations. Bold-face words in the descriptions are defined in separate entries.

### A

**AA (atomic absorption)** – A spectroscopy method used to determine the elemental composition of a sample. In this method, the sample is vaporized and the amount of light it absorbs is measured.

**accuracy** – The degree of agreement of a measurement with an accepted reference or true value. It can be expressed as the difference between two values, as a percentage of the reference or true value, or as a ratio of the measured value and the reference or true value.

**activation** – The process of making a material radioactive by bombardment with neutrons, protons, or other high energy particles.

**activation product** – A material that has become radioactive by bombardment with neutrons, protons, or other high energy particles.

**activity** – Synonym for radioactivity.

**Administrative Record** – A collection of documents established in compliance with **CERCLA**. Consists of information the CERCLA lead agency uses in its decision on the selection of response actions. The Administrative Record file should be established at or near the facility and made available to the public. An Administrative Record can also be the record for any enforcement case.

**aerobic** – An aerobic organism is one that lives, acts, or occurs only in the presence of oxygen.

**aerosol** – A gaseous suspension of very small particles of liquid or solid.

**ALARA (As Low As Reasonably Achievable)** – A phrase that describes an approach to minimize exposures to individuals and minimize releases of radioactive or other harmful material to the **environment** to levels as low as social, technical, economic, practical, and public policy considerations will permit. ALARA is not a dose limit, but a process with a goal to keep dose levels as far below applicable limits as is practicable.

**alpha radiation** – The emission of alpha particles during radioactive decay. Alpha particles are identical in makeup to the nucleus of a helium atom and have a positive charge. Alpha radiation is easily stopped by materials as thin as a sheet of paper and has a range in air of only an inch or so. Despite its low penetration ability, alpha radiation is densely ionizing and therefore very damaging when ingested or inhaled. Naturally occurring radioactive sources such as radon emit alpha radiation.

**air stripping** – A process for removing **VOCs** from contaminated water by forcing a stream of air through the water in a vessel. The contaminants evaporate into the air stream. The air may be further treated before it is released into the atmosphere.

**ambient air** – The surrounding atmosphere, usually the outside air, as it exists around people, animals, plants, and structures. It does not include the air immediately adjacent to emission sources.

**analyte** – A constituent that is being analyzed.

**anneal** – To heat a material and then cool it. In the case of thermoluminescent dosimeters (TLDs), this is done to reveal the amount of radiation the material had absorbed.

**anion** – A negatively charged ion, often written as a superscript negative sign after an element symbol, such as  $\text{Cl}^-$ .

**anthropogenic** – Resulting from human activity; anthropogenic radiation is human-made, not naturally occurring.

**AOC (area of concern)** – Under **CERCLA**, this term refers to an area where releases of hazardous substances may have occurred or a location where there has been a release or threat of a release of a hazardous substance, pollutant, or contaminant (including **radionuclides**). AOCs may include, but need not be limited to, former spill areas, landfills, surface impoundments, waste piles, land treatment units, transfer stations, wastewater treatment units, incinerators, container storage areas, scrap yards, cesspools, tanks, and associated piping that are known to have caused a release into the environment or whose integrity has not been verified.

**aquifer** – A water-saturated layer of rock or soil below the ground surface that can supply usable quantities of **groundwater** to wells and springs. Aquifers can be a source of water for domestic, agricultural, and industrial uses.

**ARPA (Archaeological Resources Protection Act)** – This law, passed in 1979, has been amended four times. It protects any material remains of past human life or activities that are of archaeological interest. Known **and potential** sites of interest are protected from uncontrolled excavations and pillage, and artifacts found on public and Indian lands are banned from commercial exchange.

**AS/SVE (air sparging/soil vapor extraction)** – A method of extracting **volatile organic compounds** from the **groundwater**, in place, using compressed air. (In contrast, air stripping occurs in a vessel.) The vapors are typically collected using a soil vapor extraction system.

### B

**background** – A sample or location used as reference or control to compare BNL analytical results to those in areas that could not have been impacted by BNL operations.

**background radiation** – **Radiation** present in the environment as a result of naturally occurring radioactive materials in the Earth, cosmic radiation, or human-made radiation sources, including fallout.

**beta radiation** – Beta radiation is composed of charged particles emitted from a nucleus during radioactive decay. A negatively charged beta particle is identical to an electron. A positively charged beta particle is called a positron. Beta radiation is more penetrating than alpha radiation, but it may be stopped by materials such as aluminum or Lucite™ panels. Naturally occurring radioactive elements such as po-

## APPENDIX A: GLOSSARY

tassium-40 emit beta radiation.

**blank** – A sample (usually reagent-grade water) used for quality control of field sampling methods, to demonstrate that cross contamination has not occurred.

**blowdown** – Water discharged from either a boiler or cooling tower in order to prevent the build-up of inorganic matter within the boiler or tower and to prevent scale formation (i.e., corrosion).

**BOD (biochemical oxygen demand)** – A measure of the amount of oxygen in biological processes that breaks down organic matter in water; a measure of the organic pollutant load. It is used as an indicator of water quality.

**Bq (becquerel)** – A quantitative measure of **radioactivity**. This alternate measure of activity is used internationally and with increasing frequency in the United States. One Bq of activity is equal to one nuclear decay per second.

**bremstrahlung** – Translates as “fast braking” and refers to electromagnetic radiation produced by the sudden retardation of a charged particle in an intense electric field.

## C

**CAA (Clean Air Act), CAA Amendments (CAAA)** – The original Clean Air Act was passed in 1963, but the U.S. air pollution control program is based on the 1970 version of the law. The 1990 Clean Air Act Amendments (CAAA) are the most far-reaching revisions of the 1970 law. In common usage, references to the CAA typically mean to the 1990 amendments. (*source*: EPA’s “Plain English Guide to the Clean Air Act” glossary, accessed 3-7-05)

**caisson** – A watertight container used in construction work under water or as a foundation.

**cap** – A layer of natural or synthetic material, such as clay or gunite, used to prevent rainwater from penetrating and spreading contamination. The surface of the cap is generally mounded or sloped so water will drain off.

**carbon adsorption/carbon treatment** – A treatment system in which contaminants are removed from **groundwater**, surface water, and air by forcing water or air through tanks containing activated carbon (a specially treated material that attracts and holds or retains contaminants).

**carbon tetrachloride** – A poisonous, nonflammable, colorless liquid, CCl<sub>4</sub>.

**CERCLA (Comprehensive Environmental Response, Compensation and Liability Act)** – Pronounced “sir-klah” and commonly known as Superfund, this law was enacted by Congress on December 11, 1980. It created a tax on the chemical and petroleum industries and provided broad federal authority to respond directly to releases or threatened releases of hazardous substances that may endanger public health or the environment. CERCLA established prohibitions and requirements concerning closed and abandoned hazardous waste sites; provided for liability of persons responsible for releases of hazardous waste at these sites; and established a trust fund to provide for cleanup when no responsible party could be identified.

The law authorizes two kinds of response actions: short-term removals, where actions may be taken to address releases or threatened releases requiring prompt response, and long-term remedial response actions that permanently and significantly re-

duce the dangers associated with releases or threats of releases of hazardous substances that are serious, but not immediately life threatening. These actions can be conducted only at sites listed on **EPA’s** National Priorities List (NPL). CERCLA was amended by the Superfund Amendments and Reauthorization Act (**SARA**) on October 17, 1986, accessed 03-7-05)

**CFR (Code of Federal Regulations)** – A codification of all regulations developed and finalized by federal agencies in the Federal Register. The CFR is arranged by “title,” with Title 10 covering energy- and radiation-related issues, and Title 40 covering protection of the environment. Subparts within the titles are included in citations, as in “40 CFR Subpart H.”

**characterization** – Facility or site sampling, monitoring, and analysis activities to determine the extent and nature of contamination. Characterization provides the basis of necessary technical information to select an appropriate cleanup alternative.

**Ci (curie)** – A quantitative measure of radioactivity. One Ci of activity is equal to 3.7E+10 decays per second. One curie has the approximate activity of 1 gram of radium. It is named after Marie and Pierre Curie, who discovered radium in 1898.

**Class GA groundwater** – New York State Department of Environmental Conservation classification for high quality groundwater, where the best intended use is as a source of drinking water supply.

**closure** – Under **RCRA** regulations, this term refers to a hazardous or solid waste management unit that is no longer operating and where potential hazards that it posed have been addressed (through clean up, immobilization, capping, etc.) to the satisfaction of the regulatory agency.

**CO<sub>2</sub> equivalent (CO<sub>2</sub>e)** – The universal unit of measurement to indicate the GWP of each of the six GHGs expressed in terms of the GWP of one unit of CO<sub>2</sub>. It is used to evaluate the release (or the avoided release) of different GHG emissions against a common basis, and is commonly expressed as metric tons carbon dioxide equivalent (MtCO<sub>2</sub>e), which is calculated by multiplying the metric tons of GHG by its GWP.

**COC (chain-of-custody)** – A method for documenting the history and possession of a sample from the time of collection, through analysis and data reporting, to its final disposition.

**cocktail** – a mixture of chemicals used for **scintillation** counting.

**collective Effective Dose Equivalent** – A measure of health risk to a population exposed to radiation. It is the sum of the **EDEs** of all individuals within an exposed population, frequently considered to be within 50 miles (80 kilometers) of an environmental release point. It is expressed in person-**rem** or person-**sievert**.

**Committed Effective Dose Equivalent** – The total **EDE** received over a 50-year period following the internal deposition of a **radionuclide**. It is expressed in **rems** or **sieverts**.

**composite sample** – A sample of an environmental medium containing a certain number of sample portions collected over a period of time, possibly from different locations. The constituent samples may or may not be collected at equal time intervals over a pre-defined period of time, such as 24 hours.

**confidence interval** – A numerical range within which the true value of a measurement or calculated value lies. In the SER, re-



diological values are shown with a 95 percent confidence interval: there is a 95 percent probability that the true value of a measurement or calculated value lies within the specified range. See also "Uncertainty" discussion in Appendix B.

**conservative** – Estimates that err on the side of caution because all possibly deleterious components are included at generous or high values.

**contamination** – Unwanted radioactive and/or hazardous material that is dispersed on or in equipment, structures, objects, air, soil, or water.

**control** – See **background**.

**cooling water** – Water used to cool machinery and equipment. *Contact* cooling water is any wastewater that contacts machinery or equipment to remove heat from the metal; *noncontact* cooling water has no direct contact with any process material or final product. *Process wastewater* cooling water is water used for cooling that may have become contaminated through contact with process raw materials or final products.

**cover boards** – Sheets of plywood placed on the ground near ponds to serve as attractive habitat for salamanders, as part of a population study.

**curie** – See **Ci**.

**CWA (Clean Water Act)** – Growing public awareness and concern for controlling water pollution led to enactment of the Federal Water Pollution Control Act Amendments of 1972. As amended in 1977, this law became commonly known as the Clean Water Act. It established the basic structure for regulating discharges of pollutants into the waters of the United States, giving **EPA** the authority to implement pollution control programs such as setting wastewater standards for industry. The CWA also continued requirements to set water quality standards for all contaminants in surface waters and made it unlawful for any person to discharge any pollutant from a **point source** into navigable waters unless a permit was obtained. The CWA also funded the construction of sewage treatment plants and recognized the need for planning to address the critical problems posed by **nonpoint source pollution**.

Revisions in 1981 streamlined the municipal construction grants process. Changes in 1987 phased out the construction grants program. Title I of the Great Lakes Critical Programs Act of 1990 put into place parts of the Great Lakes Water Quality Agreement of 1978, signed by the U.S. and Canada; the two nations agreed to reduce certain toxic pollutants in the Great Lakes. Over the years many other laws have changed parts of the CWA, accessed 03-7-05).

## D

**D<sub>2</sub>O** – See **heavy water**.

**daughter, progeny** – A given **nuclide** produced by radioactive decay from another nuclide (the "parent"). See also **radioactive series**.

**DCG (derived concentration guide)** – The concentration of a **radionuclide** in air or water that, under conditions of continuous exposure for one year by a single pathway (e.g., air inhalation, absorption, or ingestion), would result in an effective dose equivalent of 100 mrem (1 mSv). The values were established in **DOE Order 5400.5**.

**decay product** – A **nuclide** resulting from the radioactive disintegration of a **radionuclide**, being formed either directly or as a result of successive transformations in a radioactive series. A decay product may be either radioactive or stable.

**decontamination** – The removal or reduction of **radioactive** or hazardous contamination from facilities, equipment, or soils by washing, heating, chemical or electrochemical action, mechanical cleaning, or other techniques to achieve a stated objective or end condition.

**disposal** – Final placement or destruction of waste.

**DOE (Department of Energy)** – The federal agency that promotes scientific and technical innovation to support the national, economic, and energy security of the United States. DOE has responsibility for 10 national laboratories and for the science and research conducted at these laboratories, including Brookhaven National Laboratory.

**DOE Order 231.1A** – This order, Environment, Safety, and Health Reporting, is dated 8/19/03. It replaces the 1995 version, Order 231.1, as well as the "ORPS" order, DOE Order 232.1A, Occurrence Reporting and Processing of Operations Information, dated 7/21/97, and Order 210.1, Performance Indicator..., dated 9/27/95.

**DOE Order 450.1A** – This order, Environmental Protection Program, is dated 6/04/08. It revises DOE Order 450.1, issued in January 2003, to incorporate and implement the new requirements of Executive Order 13423, Strengthening Federal Environmental, Energy, and Transportation Management, issued in January 2007.

**DOE Order 5400.5** – This order, Radiation Protection of the Public and the Environment, was first published by **DOE** in 1990 and was modified in 1993. It established the standards and requirements for operations of DOE and DOE contractors with respect to protecting the public and the **environment** against undue risk from radiation.

**dose** – See **EDE**.

**dosimeter** – A portable detection device for measuring exposure to ionizing radiation. See Chapter 8 for details.

**downgradient** – In the direction of **groundwater** flow from a designated area; analogous to "downstream."

**DQO (Data Quality Objective)** – The Data Quality Objective (DQO) process was developed by EPA for facilities to use when describing their environmental monitoring matrices, sampling methods, locations, frequencies, and measured parameters, as well as methods and procedures for data collection, analysis, maintenance, reporting, and archiving. The DQO process also addresses data that monitor quality assurance and quality control.

**drift fence** – A stretch of temporary fencing to prevent an animal population from leaving the area, used at BNL as part of a population study.

**dry weight** – The dry weight concentration of a substance is after a sample is dried for analysis. Dry weight concentrations are typically higher than wet weight values.

**D-waste** – Liquid waste containing radioactivity.

## E

**EA (Environmental Assessment)** – A report that identifies potentially significant effects from any federally approved or funded project that might change the physical **environment**. If an EA identifies a "significant" potential impact (as defined by **NEPA**), an Environmental Impact Statement (EIS) must be researched and prepared.

## APPENDIX A: GLOSSARY

**EDB (ethylene dibromide)** – A colorless, nonflammable, heavy liquid with a sweet odor; slightly soluble in water. Although the U.S. Department of Health and Human Services has determined that ethylene dibromide may reasonably be anticipated to be a carcinogen, it is still used to treat felled logs for bark beetles; to control wax moths in beehives; as a chemical intermediary for dyes, resins, waxes, and gums; to spot-treat milling machinery; and to control Japanese beetles in ornamental plants.

**EDE (Effective Dose Equivalent)** – A value used to express the health risk from radiation exposure to tissue in terms of an equivalent whole body exposure. It is a “normalized” value that allows the risk from radiation exposure received by a specific organ or part of the body to be compared with the risk due to whole-body exposure. The EDE equals the sum of the doses to different organs of the body multiplied by their respective **weighting factors**. It includes the sum of the EDE due to radiation from sources external to the body and the committed effective dose equivalent due to the internal deposition of **radionuclides**. EDE is expressed in **rems** or **sieverts**.

**effluent** – Any liquid discharged to the environment, including stormwater **runoff** at a site or facility.

**EIMS (Environmental Information Management System)** – A database system used to store, manage, verify, protect, retrieve, and archive BNL’s environmental data.

**EM (environmental monitoring)** – Sampling for contaminants in air, water, sediment, soil, food stuffs, plants, and animals, either by directly measuring or by collecting and analyzing samples.

**emissions** – Any gaseous or particulate matter discharged to the atmosphere.

**EMS (Environmental Management System)** – The BNL EMS meets the requirements of the **ISO 14001 EMS standard**, with emphasis on compliance assurance, pollution prevention, and community outreach. An extensive environmental monitoring program is one component of BNL’s EMS.

**environment** – Surroundings (including air, water, land, natural resources, flora, fauna, and humans) in which an organization operates, and the interrelation of the organization and its surroundings.

**environmental aspect** – Elements of an organization’s activities, products, or services that can interact with the surrounding air, water, land, natural resources, flora, fauna, and humans.

**environmental impact** – Any change to the surrounding air, water, land, natural resources, flora, and fauna, whether adverse or beneficial, wholly or partially resulting from an organization’s activities, products, or services.

**environmental media** – Includes air, **groundwater**, surface water, soil, flora, and fauna.

**environmental monitoring or surveillance** – See **EM**.

**EPA (U. S. Environmental Protection Agency)** – The federal agency responsible for developing and enforcing environmental laws. Although state or local regulatory agencies may be authorized to administer environmental regulatory programs, EPA generally retains oversight authority.

**EPCRA (Emergency Planning and Community Right-to-Know Act)** – Also known as Title III of SARA, EPCRA was enacted by

Congress as the national legislation on community safety, to help local groups protect public health, safety, and the environment from chemical hazards. To implement EPCRA, Congress required each state to appoint a State Emergency Response Commission (SERC). The SERCs were required to divide their states into Emergency Planning Districts and to name a Local Emergency Planning Committee for each district.

Broad representation by fire fighters, health officials, government and media representatives, community groups, industrial facilities, and emergency managers ensures that all necessary elements of the planning process are represented.

**ES (environmental surveillance)** – Sampling for contaminants in air, water, sediment, soil, food stuffs, plants, and animals, either by directly measuring or by collecting and analyzing samples.

**ESA (Endangered Species Act)** – This provides a program for conserving threatened and endangered plants and animals and their habitats. The **FWS** maintains the list of 632 *endangered* species (326 are plants) and 190 *threatened* species (78 are plants). Species include birds, insects, fish, reptiles, mammals, crustaceans, flowers, grasses, and trees. Anyone can petition FWS to include a species on this list. The law prohibits any action, administrative or real, that results in a “taking” of a listed species or adversely affects habitat. Likewise, import, export, interstate, and foreign commerce of listed species are all prohibited. **EPA**’s decision to register pesticides is based in part on the risk of adverse effects on endangered species as well as environmental fate (how a pesticide will affect habitat). Under **FIFRA**, EPA can issue emergency suspensions of certain pesticides to cancel or restrict their use if an endangered species will be adversely affected.

**evapotranspiration** – A process by which water is transferred from the soil to the air by plants that take the water up through their roots and release it through their leaves and other above-ground tissue.

**exposure** – A measure of the amount of ionization produced by x-rays or gamma rays as they travel through air. The unit of radiation exposure is the roentgen (R).

## F

**fallout** – Radioactive material, made airborne as a result of aboveground nuclear weapons testing, that has been deposited on the Earth’s surface.

**FFCA (Federal Facility Compliance Act)** – Formerly, the federal government maintained that it was not subject to fines and penalties under solid and hazardous waste law because of the doctrine of “sovereign immunity.” The State of Ohio challenged this in *Ohio v. the Department of Energy (1990)*. The U.S. Circuit Court of Appeals found in favor of the State (June 11, 1990), writing that the federal government’s sovereign immunity is waived under both the **CWA** sovereign immunity provision and **RCRA**’s citizen suit provision. The Circuit Court decision was overturned by the Supreme Court on April 21, 1992, in *DOE v. Ohio*, which held that the waiver of sovereign immunity in RCRA and CWA is not clear enough to allow states to impose civil penalties directly. After the high court’s ruling, the consensus among lawmakers was that a double standard existed: the same government that developed laws to protect human health and the environment and required compliance in the

private sector, was itself not assuming the burden of compliance. As a result, Congress enacted the FFCA (October 6, 1992, Pub. Law 102-386), which effectively overturned the Supreme Court's ruling. In the legislation Congress specifically waived sovereign immunity with respect to RCRA for federal facilities.

Under section 102, FFCA amends section 6001 of RCRA to specify that federal facilities are subject to "all civil and administrative penalties and fines, regardless of whether such penalties or fines are punitive or coercive in nature." These penalties and fines can be levied by **EPA** or by authorized states. In addition, FFCA states that "the United States hereby expressly waives any immunity otherwise applicable to the United States." Although federal agents, employees, and officers are not liable for civil penalties, they are subject to criminal sanctions. No departments, agencies, or instrumentalities are subject to criminal sanctions. Section 104 (1) and (2) require EPA to conduct annual RCRA inspections of all federal facilities.

**FIFRA (Federal Insecticide, Fungicide, and Rodenticide Act)** –

The primary focus of this law was to provide federal control of pesticide distribution, sale, and use. **EPA** was given authority under FIFRA not only to study the consequences of pesticide usage but also to require users (farmers, utility companies, and others) to register when purchasing pesticides. Through later amendments to the law, users also must take exams for certification as applicators of pesticides. All pesticides used in the U.S. must be registered (licensed) by EPA. Registration assures that pesticides will be properly labeled and that if used in accordance with specifications, will not cause unreasonable harm to the environment.

**FS (feasibility study)** – A process for developing and evaluating remedial actions using data gathered during the remedial investigation. The FS defines the objectives of the remedial program for the site and broadly develops remedial action alternatives, performs an initial screening of these alternatives, and performs a detailed analysis of a limited number of alternatives that remain after the initial screening stage.

**FWS (U.S. Fish & Wildlife Service)** – The U.S. Fish and Wildlife Service is the principal federal agency responsible for conserving, protecting, and enhancing fish, wildlife, plants, and their habitats for the continuing benefit of the people of the United States. FWS manages the 95-million-acre National Wildlife Refuge System, which encompasses 544 national wildlife refuges, thousands of small wetlands, and other special management areas. It also operates 69 national fish hatcheries, 64 fishery resources offices, and 81 ecological services field stations. The agency enforces federal wildlife laws, administers the Endangered Species Act, manages migratory bird populations, restores nationally significant fisheries, conserves and restores wildlife habitat such as wetlands, and helps foreign and Native American tribal governments with their conservation efforts. It also oversees the Federal Assistance Program, which distributes hundreds of millions of dollars in excise taxes on fishing and hunting equipment to state fish and wildlife agencies.

**fugitive source** – Unanticipated sources of volatile hazardous air pollutants due to leaks from valves, pumps, compressors, relief valves, connectors, flanges, and various other pieces of equipment.

## G

**gamma radiation** – Gamma radiation is a form of electromagnetic radiation, like radio waves or visible light, but with a much shorter wavelength. It is more penetrating than **alpha** or **beta** radiation, capable of passing through dense materials such as concrete.

**gamma spectroscopy** – This analysis technique identifies specific **radionuclides**. It measures the particular energy of a radionuclide's gamma radiation emissions. The energy of these emissions is unique for each nuclide, acting as a "fingerprint."

**geotextile** – A product used as a soil reinforcement agent and as a filter medium. It is made of synthetic fibers manufactured in a woven or loose manner to form a blanket-like product.

**grab sample** – A single sample collected at one time and place.

**Green Building** – Construction that adheres to guidelines established by the Green Building Council, a coalition of leaders from across the building industry working to promote structures that are environmentally responsible, profitable, and healthy places to live and work.

**greenhouse gas (GHG)** – Carbon dioxide (CO<sub>2</sub>), nitrous oxide (N<sub>2</sub>O), methane (CH<sub>4</sub>), hydrofluorocarbons (HFCs), perfluorocarbons (PFCs), and sulfur hexafluoride (SF<sub>6</sub>).

**global warming potential (GWP)** – A factor describing the relative forcing impact of one unit of a given GHG relative to one unit of CO<sub>2</sub>.

**groundwater** – Water found beneath the surface of the ground (subsurface water). Groundwater usually refers to a zone of complete water saturation containing no air.

**gunite** – A mixture of cement, sand, and water sprayed over a mold to form a solid, impermeable surface. Formerly a trademarked name, now in general usage.

## H

**half-life (t<sub>1/2</sub>)** – The time required for one-half of the atoms of any given amount of a radioactive substance to disintegrate; the time required for the activity of a radioactive sample to be reduced by one half.

**halon** – An ozone-depleting fire suppressant; suffixes (-1301, etc.) indicate variants.

**hazardous waste** – Toxic, corrosive, reactive, or ignitable materials that can injure human health or damage the environment. It can be liquid, solid, or sludge, and include heavy metals, organic solvents, reactive compounds, and corrosive materials. It is defined and regulated by **RCRA**, Subtitle C.

**heat input** – The heat derived from combustion of fuel in a steam generating unit. It does not include the heat from preheated combustion air, recirculated flue gases, or the exhaust from other sources.

**heavy water (D<sub>2</sub>O)** – A form of water containing deuterium, a non-radioactive isotope of hydrogen.

**herpetofaunal** – Relating to the study of reptiles.

**hot cell** – Shielded and air-controlled facility for the remote handling of radioactive material.

**hydrofluorocarbons (HFCs)** – One of six primary GHGs primarily used as refrigerants; a class of gases containing hydrogen, fluorine, and carbon, and possessing a range of GWP values from 12 to 11,700.

## APPENDIX A: GLOSSARY

**hydrology** – The science dealing with the properties, distribution, and circulation of natural water systems.

### I

**inert** – Lacking chemical or biological action.

**influent** – Liquid (such as stormwater runoff or wastewater) flowing into a reservoir, basin, or treatment plant.

**intermittent river** – A stream that dries up on occasion, usually as a result of seasonal factors or decreased contribution from a source such as a wastewater treatment plant.

**ionizing radiation** – Any radiation capable of displacing electrons from atoms or molecules, thereby producing ions. High doses of ionizing radiation may produce severe skin or tissue damage. *See also alpha, beta, gamma radiation; x-rays.*

**ISO 14001 EMS standard** – The International Organization for Standardization (ISO) sets standards for a wide range of products and management operations. Following the success of the ISO 9000 Standards for quality management, ISO introduced the 14000 series for environmental management. BNL was the first DOE Office of Science laboratory to obtain third-party registration to this globally recognized environmental standard.

**isotope** – Two or more forms of a chemical element having the same number of protons in the nucleus (the same atomic number), but having different numbers of neutrons in the nucleus (different atomic weights). Isotopes of a single element possess almost identical chemical properties.

### L

**leaching** – The process by which soluble chemical components are dissolved and carried through soil by water or some other percolating liquid.

**light water** – As used in this document, tap water, possibly filtered.

**liquid scintillation counter** – An analytical instrument used to quantify tritium, carbon-14, and other beta-emitting **radionuclides**. *See also scintillation.*

### M

**matrix, matrices** – The natural context (e.g., air, vegetation, soil, water) from which an environmental sample is collected.

**MDL (minimum detection limit)** – The lowest level to which an analytical parameter can be measured with certainty by the analytical laboratory performing the measurement. While results below the MDL are sometimes measurable, they represent values that have a reduced statistical confidence associated with them (less than 95 percent confidence).

**MEI (maximally exposed individual)** – The hypothetical individual whose location and habits tend to maximize his/her radiation dose, resulting in a dose higher than that received by other individuals in the general population.

**metamorphic** – In the state of changing from larval to mature forms.

**mixed waste** – Waste that contains both a hazardous waste component (regulated under Subtitle C of **RCRA**) and a radioactive component.

**monitoring** – The collection and analysis of samples or measurements of effluents and emissions for the purpose of characterizing and quantifying contaminants, and demonstrating compliance with applicable standards.

**monitoring well** – A well that collects **groundwater** for the purposes of evaluating water quality, establishing groundwater flow and elevation, determining the effectiveness of treatment systems, and determining whether administrative or engineered controls designed to protect groundwater are working as intended.

**MSL (mean sea level)** – The average height of the sea for all stages of the tide. Used as a benchmark for establishing groundwater and other elevations.

### N

**NEPA (National Environmental Policy Act)** – Assures that all branches of government give proper consideration to the environment before any land purchase or any construction projects, including airports, buildings, military complexes, and highways. Project planners must assess the likely impacts of the project by completing an Environmental Assessment (EA) and, if necessary, an Environmental Impact Statement (EIS).

**NESHAPs (National Emissions Standards for Hazardous Air Pollutants)** – Standards that limit emissions from specific sources of air pollutants linked to serious health hazards. NESHAPs are developed by **EPA** under the CAA. Hazardous air pollutants can be chemical or radioactive. Their sources may be human-made, such as vehicles, power plants, and industrial or research processes, or natural, such as radioactive gas in soils.

**neutrino** – A small, neutral particle created as a result of particle decay. Neutrinos were believed to be massless, but recent studies have indicated that they have small, but finite, mass. Neutrinos interact very weakly.

**NHPA (National Historic Preservation Act)** – With passage of the National Historic Preservation Act in 1966, Congress made the federal government a full partner and a leader in historic preservation. The role of the federal government is fulfilled through the National Park Service. State participation is through State Historic Preservation Offices. “Before 1966, historic preservation was mainly understood in one-dimensional terms: the proverbial historic shrine or Indian burial mound secured by lock and key—usually in a national park—set aside from modern life as an icon for study and appreciation. NHPA largely changed that approach, signaling a much broader sweep that has led to the breadth and scope of the vastly more complex historic preservation mosaic we know today.”

**nonpoint source pollution** – Nonpoint source pollution occurs when rainfall, snowmelt, or irrigation water runs over land or through the ground, picks up pollutants, and deposits them into rivers, lakes, and coastal waters or introduces them into **groundwater**. Nonpoint source pollution also includes adverse changes to the hydrology of water bodies and their associated aquatic habitats. After Congress passed the Clean Water Act in 1972, the nation’s water quality community emphasized **point source** pollution (coming from a discrete conveyance or location, such as industrial and municipal waste discharge pipes). Point sources were the primary contributors to the degradation of water quality then, and the significance of nonpoint



source pollution was poorly understood. Today, nonpoint source pollution remains the largest source of water quality problems. It is the main reason that approximately 40 percent of surveyed rivers, lakes, and estuaries are not clean enough to meet basic uses such as fishing or swimming.

**NO<sub>x</sub>** – Nitrogen oxides are gases consisting of one molecule of nitrogen and varying numbers of oxygen molecules. Nitrogen oxides are produced, for example, by the combustion of fossil fuels in vehicles and electric power plants. In the atmosphere, NO<sub>x</sub> can contribute to the formation of smog, impair visibility, and have health consequences. NO<sub>x</sub> are considered “criteria air pollutants” under the CAA.

**nuclide** – A species of atom characterized by the number of protons and neutrons in the nucleus.

**NYCRR (New York Codes, Rules, and Regulations)** The NYCRR primarily contains state agency rules and regulations adopted under the State Administrative Procedure Act. There are 22 Titles: one for each state department, one for miscellaneous agencies and one for the Judiciary. Title 6 addresses environmental conservation, so many references in the SER are to “6 NYCRR.”

## O

**O<sub>3</sub>** – See ozone.

**on site** – The area within the boundaries of a site that is controlled with respect to access by the general public.

**opacity** – Under the Clean Air Act (CAA), a measurement of the degree to which smoke (emissions other than water vapor) reduces the transmission of light and obscures the view of an object in the background.

**ORPS (Occurrence Reporting and Processing System)** A system for identifying, categorizing, notifying, investigating, analyzing, and reporting to DOE events or conditions discovered at the BNL site. It was originally established by DOE Order 232.1, which has been replaced by **DOE Order 231.1A**.

**OU (operable unit)** – Division of a contaminated site into separate areas based on the complexity of the problems associated with it. Operable units may address geographical portions of a site, specific site problems, or initial phases of an action. They may also consist of any set of actions performed over time, or actions that are concurrent, but located in different parts of a site. An OU can receive specific investigation and a particular remedy may be proposed. A Record of Decision (ROD) is prepared for each OU.

**outfall** – The place where wastewater is discharged.

**oxides of nitrogen (NO<sub>x</sub>)** – See NO<sub>x</sub>.

**ozone (O<sub>3</sub>)** – A very reactive type of oxygen formed naturally in the upper atmosphere which provides a shield for the earth from the sun’s ultraviolet rays. At ground level or in the lower atmosphere, it is pollution that forms when oxides of nitrogen and hydrocarbons react with oxygen in the presence of strong sunlight. Ozone at ground level can lead to health effects and cause damage to trees and crops.

## P

**P2 (pollution prevention)** – Preventing or reducing the generation of pollutants, contaminants, hazardous substances, or wastes at the source, or reducing the amount for treatment, storage, and disposal

through recycling. Pollution prevention can be achieved through reduction of waste at the source, segregation, recycle/reuse, and the efficient use of resources and material substitution. The potential benefits of pollution prevention include the reduction of adverse environmental impacts, improved efficiency, and reduced costs.

**PAAA (Price-Anderson Act Amendments)** – The Price-Anderson Act (PAA) was passed in 1957 to provide for prompt compensation in the case of a nuclear accident. The PAA provided broad financial coverage for damage, injury, and costs, and required DOE to indemnify contractors. The amended act of 1988 (PAAA) extended indemnification for 15 years and required DOE to establish and enforce nuclear safety rules. The PAAA Reauthorization, passed in December of 2002, extended current indemnification levels through 2004. 10 CFR 820 and its Appendix A provide DOE enforcement procedure and policy.

**Parshall flume** – An engineered channel used to measure the flow rate of water. It was named after the inventor, who worked for the U.S. government as an irrigation research engineer.

**PCBs (polychlorinated biphenyls)** – A family of organic compounds used from 1926 to 1979 (when they were banned by EPA) in electrical transformers, lubricants, carbonless copy paper, adhesives, and caulking compounds. PCBs are extremely persistent in the environment because they do not break down into different and less harmful chemicals. PCBs are stored in the fatty tissues of humans and animals through the bioaccumulation process.

**percent recovery** – For analytical results, the ratio of the measured amount, divided by the known (spiked) amount, multiplied by 100.

**perfluorocarbons (PFCs)** – One of the six primary GHGs consisting of a class of gases containing carbon and fluorine typically emitted as by-products of industrial and manufacturing processes, and possessing GWPs ranging from 5,700 to 11,900.

**permit** – An authorization issued by a federal, state, or local regulatory agency. Permits are issued under a number of environmental regulatory programs, including CAA, CWA, RCRA, and TSCA. Permits grant permission to operate, to discharge, to construct, and so on. Permit provisions may include emission/effluent limits and other requirements such as the use of pollution control devices, monitoring, record keeping and reporting. Also called a “license” or “certificate” under some regulatory programs.

**pH** – A measure of hydrogen ion concentration in an aqueous solution. Acidic solutions have a pH less than 7, neutral solutions have a pH of 7, and basic solutions have a pH greater than 7 and up to 14.

**plume** – A body of contaminated groundwater or polluted air flowing from a specific source. The movement of a groundwater plume is influenced by such factors as local groundwater flow patterns, the character of the aquifer in which groundwater is contained, and the density of contaminants. The movement of an air contaminant plume is influenced by the ambient air motion, the temperatures of the ambient air and of the plume, and the density of the contaminants.

**point source** – Any confined and discrete conveyance (e.g., pipe, ditch, well, or stack) of a discharge.

**pollutant** – Any hazardous or radioactive material naturally occurring or added to an environmental medium, such as air, soil, water, or vegetation.



## APPENDIX A: GLOSSARY

**potable water** – Water of sufficient quality for use as drinking water without endangering the health of people, plants, or animals.

**precision** – A statistical term describing the dispersion of data around a central value, usually represented as a variance, standard deviation, standard error, or confidence interval.

**putrescible waste** – Garbage that contains food and other organic biodegradable materials. There are special management requirements for this waste in 6 **NYCRR** Part 360.

### Q

**QA (quality assurance)** – In environmental monitoring, any action to ensure the reliability of monitoring and measurement data. Aspects of QA include procedures, inter-laboratory comparison studies, evaluations, and documentation.

**QC (quality control)** – In environmental monitoring, the routine application of procedures to obtain the required standards of performance in monitoring and measurement processes. QC procedures include calibration of instruments, control charts, and analysis of replicate and duplicate samples.

**qualifier** – A letter or series of letter codes in a graph or chart indicating that the associated value did not meet analytical requirements or was estimated.

**quenching** – Anything that interferes with the conversion of decay energy to electronic signal in the photomultiplier tubes of detection equipment, usually resulting in a reduction in counting efficiency.

### R

**R (roentgen)** – A unit of exposure to ionizing radiation. It is the amount of gamma or x-rays required to produce ions carrying one electrostatic unit of electrical charge in one cubic centimeter of dry air under standard conditions. It is named after the German scientist Wilhelm Roentgen, who discovered x-rays.

**RA (removal actions, “removals”)** – Interim actions that are undertaken to prevent, minimize, or mitigate damage to the public health or environment that may otherwise result from a release or threatened release of hazardous substances, pollutants, or contaminants pursuant to **CERCLA**, and that are not inconsistent with the final remedial action. Under **CERCLA**, **EPA** may respond to releases or threats of releases of hazardous substances by starting an RA to stabilize or clean up an incident or site that immediately threatens public health or welfare. Removal actions are less comprehensive than **remedial** actions. However, removal actions must contribute to the efficiency of future remedial actions.

**radiation** – Some atoms possess excess energy, causing them to be physically unstable. Such atoms become stable when the excess energy is released in the form of charged particles or electromagnetic waves, known as radiation.

**radiation event** – A single detection of a charged particle or electromagnetic wave.

**radioactive series** – A succession of **nuclides**, each of which transforms by radioactive disintegration into the next until a stable nuclide results. The first member of the series is called the parent and the intermediate members are called daughters or progeny.

**radioactivity** – The spontaneous transition of an atomic nucleus

from a higher energy to a lower energy state. This transition is accompanied by the release of a charged particle or electromagnetic waves from the atom. Also known as “activity.”

**radionuclide** – A radioactive element characterized by the number of protons and neutrons in the nucleus. There are several hundred known radionuclides, both artificially produced and naturally occurring.

**RCRA (Resource Conservation and Recovery Act)** Pronounced “rick-rah,” this act of Congress gave **EPA** the authority to control the generation, transportation, treatment, storage, and disposal of hazardous waste. RCRA also set forth a framework for the management of nonhazardous wastes. The 1986 amendments to RCRA enabled EPA to address environmental problems that could result from underground tanks storing petroleum and other hazardous substances. RCRA focuses only on active and future facilities and does not address abandoned or historical sites (see **CERCLA**). In 1984, amendments to RCRA called the Hazardous and Solid Waste Amendments (HSWA, pronounced “hiss-wa”) required phasing out the land disposal of hazardous waste. Some other mandates of this strict law include increased enforcement authority for EPA, more stringent hazardous waste management standards, and a comprehensive underground storage tank (UST) program.

**recharge** – The process by which water is added to a zone of saturation (aquifer) from surface infiltration, typically when rainwater soaks through the earth to reach an aquifer.

**recharge basin** – A basin (natural or artificial) that collects water. The water will infiltrate to the aquifer.

**release** – Spilling, leaking, pumping, pouring, emitting, emptying, discharging, injecting, escaping, leaching, dumping, or disposing of a hazardous substance, pollutant, or contaminant into the environment. The National Contingency Plan also defines the term to include a threat of release.

**rem** – Stands for “roentgen equivalent man,” a unit by which human radiation dose is assessed (see also **Sv**). The rem is a risk-based value used to estimate the potential health effects to an exposed individual or population. 100 rem = 1 sievert.

**remedial (or remediation) alternatives** – Options considered under **CERCLA** for decontaminating a site such as an operable unit (**OU**) or area of concern (**AOC**). Remedial actions are long-term activities that prevent the possible release, or stop or substantially reduce the actual release, of substances that are hazardous but not immediately life-threatening. See also feasibility study (**FS**) and Record of Decision (**ROD**).

**residual fuel** – Crude oil, Nos. 1 and 2 fuel oil that have a nitrogen content greater than 0.05 weight percent, and all fuel oil Nos. 4, 5, and 6, as defined by the American Society of Testing and Materials in ASTM D396-78, *Standard Specifications for Fuel Oils*, (c. 2001).

**riparian** – An organism living on the bank of a river, lake, or tidal water.

**ROD (Record of Decision)** – A document that records a regulatory agency’s decision for the selected remedial action. The ROD also includes a responsiveness summary and a bibliography of documents that were used to reach the remedial decision. When the ROD is finalized, remedial design and implementation can begin.

**roentgen** – See R.

**RPD (relative percent difference)** – A measure of precision, expressed by the formula:  $RPD = [(A-B)/(A+B)] \times 200$ , where A equals the concentration of the first analysis and B equals the concentration of the second analysis.

**runoff** – The movement of water over land. Runoff can carry pollutants from the land into surface waters or uncontaminated land.

## S

**sampling** – The extraction of a prescribed portion of an effluent stream or environmental media for purposes of inspection or analysis.

**SARA (Superfund Amendments and Reauthorization Act)** – This Act of Congress in 1986 reauthorized CERCLA to continue cleanup activities around the country. Several site-specific amendments, definitions clarifications, and technical requirements were added to the legislation, including additional enforcement authorities. Title III of SARA also authorized EPCRA.

**SBMS (Standards-Based Management System)** – A document management tool used to develop and integrate systems, and to demonstrate BNL's conformance to requirements to perform work safely and efficiently.

**scintillation** – Flashes of light produced in a phosphor by a radioactive material.

**Scope 1 emissions** – Direct greenhouse gas emissions from sources that are owned or controlled by a Federal agency.

**Scope 2 emissions** – Indirect greenhouse gas emissions resulting from the generation of electricity, heat, or steam purchased by a Federal agency.

**Scope 3 emissions** – Greenhouse gas emissions from sources not owned or directly controlled by a Federal agency, but related to agency activities such as vendor supply chains, delivery services, and employee travel and commuting.

**SDWA (Safe Drinking Water Act)** – The Safe Drinking Water Act was established to protect the quality of drinking water in the United States. It focuses on all waters actually or potentially designed for drinking use, whether from above ground or underground sources. The SDWA authorized EPA to establish safe standards of purity and required all owners or operators of public water systems to comply with health-related standards. State governments assume regulatory power from EPA.

**sediment** – The layer of soil and minerals at the bottom of surface waters, such as streams, lakes, and rivers.

**sensitivity** – The minimum amount of an analyte that can be repeatedly detected by an instrument.

**sievert** – See Sv.

**skyshine** – Radiation emitted upward from an open-topped, shielded enclosure and reflected downward, resulting in the possibility that flora and fauna (including humans) outside the shielded enclosure can be exposed to radiation.

**sludge** – Semisolid residue from industrial or water treatment processes.

**sole source aquifer** – An area defined by EPA as being the primary source of drinking water for a particular region. Includes the surface area above the sole source aquifer and its recharge area.

**SPDES (State Pollutant Discharge Elimination System)** This permit program is delegated to the states, but the effluent limitations and other requirements are set by the federal government. 6 NYCRR Section 750-1.11(a) concerns the provisions of SPDES permits and lists the citations for the various effluent limitations from the Federal Register and the CFR.

**stable** – Nonradioactive.

**stakeholder** – People or organizations with vested interests in BNL and its environment and operations. Stakeholders include federal, state, and local regulators; the public; DOE; and BNL staff.

**stripping** – A process used to remove volatile contaminants from a substance (see also **air stripping**).

**sulfur hexafluoride (SF<sub>6</sub>)** – One of six primary GHGs, consisting of a single sulfur atom and six fluoride atoms, a GWP of 23,900, and primarily used in electrical transmission and distribution systems.

**sump** – A pit or tank that catches liquid **runoff** for drainage or disposal.

**Sv (sievert)** – A unit for assessing the risk of human radiation dose, used internationally and with increasing frequency in the United States. One sievert is equal to 100 rem.

**SVE (soil vapor extraction)** – An *in situ* (in-place) method of extracting **VOCs** from soil by applying a vacuum to the soil and collecting the air, which can be further treated to remove the VOCs, or discharged to the atmosphere.

**SVOC** – A general term for volatile organic compounds that vaporize relatively slowly at standard temperature and pressure. See also VOC.

**synoptic** – Relating to or displaying conditions as they occur over a broad area.

## T

**t<sub>1/2</sub> (half-life)** – The time required for one-half of the atoms of any given amount of a radioactive substance to disintegrate; the time required for the activity of a radioactive sample to be reduced by one half.

**TCE (trichloroethylene, also known as trichloroethene)** A stable, colorless liquid with a low boiling point. TCE has many industrial applications, including use as a solvent and as a metal degreasing agent. TCE may be toxic when inhaled or ingested, or through skin contact, and can damage vital organs, especially the liver. See also **VOC**.

**Tier III reports** – Reports, required by SARA, that are prepared to document annual emissions of toxic materials to the environment. These are also known as TRI Section 313 reports.

**TLD (thermoluminescent dosimeter)** – A device used to measure radiation dose to occupational workers or radiation levels in the environment.

**tritium** – The heaviest and only radioactive nuclide of hydrogen, with a **half-life** of 12.3 years and a very-low-energy radioactive decay (tritium is a **beta** emitter).

**TSCA (Toxic Substances Control Act)** – Enacted by Congress in 1976, TSCA empowers EPA to track the 75,000 industrial chemicals produced or imported into the United States. EPA repeatedly

## APPENDIX A: GLOSSARY

screens these chemicals and can require reporting or testing of any that may pose an environmental or human health hazard. EPA can ban the manufacture or import of chemicals that pose an unreasonable risk.

**TVOC (total volatile organic compounds)** – A sum of all individual **VOC** concentrations detected in a given sample.

### U

**UIC (underground injection control)** – A hole with vertical dimensions greater than its largest horizontal dimensions; used for disposal of wastewater.

**UST (underground storage tank)** – A stationary device, constructed primarily of nonferrous material, designed to contain petroleum products or hazardous materials. In a UST, 10 percent or more of the volume of the tank system is below the surface of the ground.

**upgradient/upslope** – A location of higher **groundwater** elevation; analogous to “upstream.”

### V

**vadose** – Relating to water in the ground that is above the permanent groundwater level.

**vernal pool** – A small, isolated, and contained basin that holds water on a temporary basis, most commonly during winter and spring. It has no aboveground outlet for water and is extremely important to the life cycle of many amphibians (such as the tiger salamander), as it is too shallow to support fish, a major predator of amphibian larvae.

**VOC (volatile organic compound)** – A general term for organic compounds capable of a high degree of vaporization at standard temperature and pressure. Because VOCs readily evaporate into the air, the potential for human exposure is greatly increased. Due to widespread industrial use, VOCs are commonly found in soil and groundwater.

**VUV** – Stands for “very ultraviolet” and refers to a beamline at the NSLS with wavelengths at the far ultraviolet end of the spectrum.

### W

**waste minimization** – Action that avoids or reduces the generation of waste, consistent with the general goal of minimizing current and future threats to human health, safety, and the environment. Waste minimization activities include recycling, improving energy usage, reducing waste at the source, and reducing the toxicity of hazardous waste. This action is associated with pollution prevention, but is more likely to occur after waste has been generated.

**water table** – The water-level surface below the ground where the unsaturated zone ends and the saturated zone begins. It is the level to which a well that is screened in the unconfined aquifer will fill with water.

**watershed** – The region draining into a river, a river system, or a body of water.

**weighting factor** – A factor which, when multiplied by the dose equivalent delivered to a body organ or tissue, yields the equivalent risk due to a uniform radiation exposure of the whole body. See also **EDE**.

**wet weight** – The wet weight concentration of a substance is before a sample is dried for analysis (in other words, in its “natural” state), and is the form most likely to be consumed. Wet weight concentrations are typically lower than dry weight values.

**wind rose** – A diagram that shows the frequency of wind from different directions at a specific location.

### X

**x-rays** – A form of electromagnetic **radiation** with short wavelength, generated when high-energy electrons strike matter or when lower-energy **beta** radiation is absorbed in matter. **Gamma** radiation and x-rays are identical, except for the source.

### Z

**zeolite** – A naturally occurring group of more than 100 minerals, formed of silicates and aluminum, with unique and diverse crystal properties. Zeolites can perform ion exchange, filtering, odor removal, and chemical sieve and gas absorption tasks. Synthetic zeolites are now used for most applications.

## Understanding Radiation

This section introduces the general reader to some basic concepts of radioactivity and an understanding of the radiation emitted as radioactive materials decay to a stable state. To better comprehend the radiological information in the Site Environmental Report (SER), it is important to remember that not all radiations are the same and that different kinds of radiation affect living beings differently.

This appendix includes discussions on the common sources of radioactivity in the environment, types of radiation, the analyses used to quantify radioactive material, and how radiation sources contribute to radiation dose. Some general statistical concepts are also presented, along with a discussion of radionuclides that are of environmental interest at Brookhaven National Laboratory (BNL).

The discussion begins with some definitions and background information on scientific notation and numerical prefixes used when measuring dose and radioactivity. The definitions of commonly used radiological terms are found in the Technical Topics section of the glossary, Appendix A, and are indicated in boldface type here only when the definition in the glossary provides additional details.

### RADIOACTIVITY AND RADIATION


All substances are composed of atoms that are made of subatomic particles: protons, neutrons, and electrons. The protons and neutrons are tightly bound together in the positively charged nucleus (plural: nuclei) at the center of the atom. The nucleus is surrounded by a cloud of negatively charged electrons. Most nuclei are stable because the forces holding the protons and neutrons together are strong enough to overcome the electrical repulsive force that tries to push them apart. When the number of neutrons in the nucleus exceeds a threshold, then the nucleus becomes unstable and will spontaneously “decay,” or emit excess energy (“nuclear” energy) in the form of charged particles or electromagnetic waves. Radiation is the excess energy released by unstable atoms. Radioactivity and radioactive refer to the unstable nuclear property of a substance (e.g., radioactive uranium).

Radiation that has enough energy to remove orbital electrons (a process called ionization) is classified as ionizing radiation. Radiation that does not have enough energy to remove electrons is called nonionizing radiation. Examples of nonionizing radiation include most visible light, infrared light, micro-waves, and radio waves. All radiation, whether ionizing or not, may pose health risks. In the SER, radiation refers to ionizing radiation.

Radioactive elements (or radionuclides) are referred to by name followed by a number, such as cesium-137. The number indicates the mass of that element and the total number of neutrons and protons contained in the nucleus of the atom. Another way to specify cesium-137 is Cs-137, where Cs is the chemical symbol for cesium in the Periodic Table of the Elements. This type of abbreviation is used throughout the SER.

### SCIENTIFIC NOTATION

Most numbers used for measurement and quantification in the SER are either very large or very small, and many zeroes would be required to express their value. To avoid this, scientific notation is used, with numbers represented in multiples of 10. For example, the number two million five hundred thousand (two and a half million, or 2,500,000) is written in scientific notation as  $2.5 \times 10^6$ , which represents “2.5 multiplied by 10 raised to the power of 6.” Since even “ $2.5 \times 10^6$ ” can be cumbersome, the capital letter E is substituted for the phrase “10 raised to the power of.” Using this format, 2,500,000 is represented as 2.5E+06. The “+06” refers to the number of places the decimal point was moved to the left to create the shorter version. Scientific notation is also used to represent very small numbers approaching zero, in which case a minus sign follows the E rather

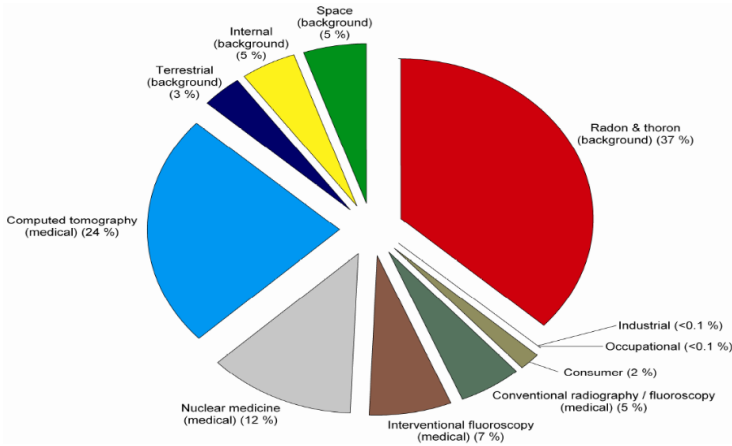

**Figure B-1. Typical Annual Radiation Doses from Natural and Man-Made Sources (mrem).** Source: NCRP Report No. 160 (NCRP 2009)

Figure B-1. Typical Annual Radiation Doses from Natural and Man Made Sources (mrem). Source: NCRP Report No. 160 (NCRP 2009) than a plus. For example, 0.00025 can be written as  $2.5 \times 10^{-4}$  or  $2.5E-04$ . Here, “-04” indicates the number of places the decimal point was moved to the left.

**NUMERICAL PREFIXES**

Another method of representing very large or small numbers without using many zeroes is to use prefixes to represent multiples of ten. For example, the prefix milli (abbreviated m) means that the value being represented is one-thousandth of a whole unit; 3 mg (milligrams) is 3 thousandths of a gram or E-03. See Appendix C for additional common prefixes, including pico (p), which means trillionth or E-12, giga (G), which means billion or E+09, and tera (T), which means trillion, E+12.

**SOURCES OF IONIZING RADIATION**

Radiation is energy that has both natural and synthetic sources. Some radiation is essential to life, such as heat and light from the sun.

Exposure to high-energy (ionizing) radiation has to be managed, as it can pose serious health risks at large doses. Living things are exposed to radiation from natural background sources, such as the atmosphere, soil, water, food, and even our own bodies. Humans are exposed to ionizing radiation from a variety of common sources, the most significant of which follow.

*Background Radiation* – Radiation that occurs

naturally in the environment is also called background activity. Background radiation consists of cosmic radiation from outer space, radiation from radioactive elements in soil and rocks, and radiation from radon and its decay products in air. Some people use the term background when referring to all non-occupational sources commonly present. Other people use natural to refer only to cosmic and terrestrial sources, and background to refer to common human-made sources such as medical procedures, consumer products, and radioactivity present in the atmosphere from former nuclear testing. In the SER, the term natural background is used to refer to radiation from cosmic and terrestrial radiation.

*Cosmic* – Cosmic radiation primarily consists of charged particles that originate in space, beyond the earth’s atmosphere. This includes ionizing radiation from the sun, and secondary radiation generated by the entry of charged particles into the earth’s atmosphere at high speeds and energies. Radioactive elements such as hydrogen-3 (tritium), beryllium-7, carbon-14, and sodium-22 are produced in the atmosphere by cosmic radiation. Exposure to cosmic radiation increases with altitude, because at higher elevations the atmosphere and the earth’s magnetic field provide less shielding. Therefore, people who live in the mountains are exposed to more cosmic radiation than people who live at sea level. The average dose from cosmic radiation to a person living in the United States is approximately 31 mrem per year. (For an explanation of dose, see effective dose equivalent in Appendix A. The units rem and sieverts also are explained in Appendix A.)

*Terrestrial* – Terrestrial radiation is released by radioactive elements that have been present in the soil since the formation of the earth. Common radioactive elements that contribute to terrestrial exposure include isotopes of potassium, thorium, actinium, and uranium. The average dose from terrestrial radiation to a person living in the United States is approximately 21 mrem per year, but may vary considerably depending on the local geology.

*Internal* – Internal exposure occurs when radionuclides are ingested, inhaled, or absorbed through the skin. Radioactive material may be incorporated into food through the uptake of ter-



restrial radionuclides by plant roots. People can ingest radionuclides when they eat contaminated plant matter or meat from animals that have consumed contaminated plants. The average dose from food for a person living in the United States is about 31 mrem per year. A larger exposure, for most people, comes from breathing the decay products of naturally occurring radon gas. The average dose from breathing air with radon byproducts is about 230 mrem per year, but that amount varies depending on geographical location. An Environmental Protection Agency (EPA) map shows that BNL is located in one of the regions with the lowest potential radon risk.

*Medical* – Every year in the United States, millions of people undergo medical procedures that use ionizing radiation. Such procedures include chest and dental x-rays, Computed Tomography (CT), mammography, thallium heart stress tests, and tumor irradiation therapies. The average doses from primary sources of medical exposure are as follows: CT at 150 mrem, nuclear medicine at 74 mrem, and radiography/fluoroscopy at 74 mrem.

*Anthropogenic* – Sources of anthropogenic (human-made) radiation include consumer products such as static eliminators (containing polonium-210), smoke detectors (containing americium-241), cardiac pacemakers (containing plutonium-238), fertilizers (containing isotopes from uranium and thorium decay series), and tobacco products (containing polonium-210 and lead-210). The average dose from consumer products to a person living in the United States is 13 mrem per year (excluding tobacco contributions).

### COMMON TYPES OF IONIZING RADIATION

The three most common types of ionizing radiation are described below.

*Alpha Radiation* – An alpha particle is identical in makeup to the nucleus of a helium atom, consisting of two neutrons and two protons. Alpha particles have a positive charge and little or no penetrating power in matter. They are easily stopped by materials such as paper and have a range in air of only an inch or so. However, if alpha-emitting material is ingested, alpha particles can pose a health risk inside the body. Naturally occurring radioactive elements such as uranium emit alpha radiation.

*Beta Radiation* – Beta radiation is composed of particles that are identical to electrons. Therefore, beta particles have a negative charge. Beta radiation is slightly more penetrating than alpha radiation, but most beta radiation can be stopped by materials such as aluminum foil and plexiglass panels. Beta radiation has a range in air of several feet. Some naturally occurring radioactive elements, such as potassium-40, emit beta radiation. Beta particles present a hazard to the skin and eyes.

*Gamma Radiation* – Gamma radiation is a form of electromagnetic radiation, like radio waves or visible light, but with a much shorter wavelength. Gamma rays are emitted from a radioactive nucleus along with alpha or beta particles. Gamma radiation is more penetrating than alpha or beta radiation, capable of passing through dense materials such as concrete. Gamma radiation is identical to x-rays except that x-rays are less energetic. Only a fraction of the total gamma rays a person is exposed to will interact with the human body.

### TYPES OF RADIOLOGICAL ANALYSES

The amount of radioactive material in a sample of air, water, soil, or other material can be assessed using several analyses, the most common of which are described below.

*Gross alpha* – Alpha particles are emitted from radioactive material in a range of different energies. An analysis that measures all alpha particles simultaneously, without regard to their particular energy, is known as a gross alpha activity measurement. This type of measurement is valuable as a screening tool to indicate the total amount but not the type of alpha-emitting radionuclides that may be present in a sample.

*Gross beta* – This is the same concept as that for gross alpha analysis, except that it applies to the measurement of gross beta particle activity.

*Tritium* – Tritium radiation consists of low-energy beta particles. It is detected and quantified by liquid scintillation counting. More information on tritium is presented in the section Radionuclides of Environmental Interest, later in this appendix.

*Strontium-90* – Due to the properties of the radiation emitted by strontium-90 (Sr-90), a special analysis is required. Samples are chemically pro-

## APPENDIX B: UNDERSTANDING RADIATION

cessed to separate and collect any strontium atoms that may be present. The collected atoms are then analyzed separately. More information on Sr-90 is presented in the section Radionuclides of Environmental Interest.

*Gamma* – This analysis technique identifies specific radionuclides. It measures the particular energy of a radionuclide's gamma radiation emission. The energy of these emissions is unique for each radionuclide, acting as a "fingerprint" to identify it.

### STATISTICS

Two important statistical aspects of measuring radioactivity are uncertainty in results and negative values.

*Uncertainty* – Because the emission of radiation from an atom is a random process, a sample counted several times usually yields a slightly different result each time; therefore, a single measurement is not definitive. To account for this variability, the concept of uncertainty is applied to radiological data. In the SER, analysis results are presented in an  $x \pm y$  format, where "x" is the analysis result and " $\pm y$ " is the 95 percent "confidence interval" of that result. That means there is a 95 percent probability that the true value of x lies between  $(x + y)$  and  $(x - y)$ .

*Negative values* – There is always a small amount of natural background radiation. The laboratory instruments used to measure radioactivity in samples are sensitive enough to measure the background radiation along with any contaminant radiation in the sample. To obtain a true measure of the contaminant level in a sample, the background radiation level must be subtracted from the total amount of radioactivity measured. Due to the randomness of radioactive emissions and the very low concentrations of some contaminants, it is possible to obtain a background measurement that is larger than the actual contaminant measurement. When the larger background measurement is subtracted from the smaller contaminant measurement, a negative result is generated. The negative results are reported, even though doing so may seem illogical, but they are essential when conducting statistical evaluations of data.

Radiation events occur randomly; if a radioac-

tive sample is counted multiple times, a spread, or distribution, of results will be obtained. This spread, known as a Poisson distribution, is centered about a mean (average) value. Similarly, if background activity (the number of radiation events observed when no sample is present) is counted multiple times, it also will have a Poisson distribution. The goal of a radiological analysis is to determine whether a sample contains activity greater than the background reading detected by the instrument.

Because the sample activity and the background activity readings are both Poisson distributed, subtraction of background activity from the measured sample activity may result in values that vary slightly from one analysis to the next. Therefore, the concept of a minimum detection limit (MDL) was established to determine the statistical likelihood that a sample's activity is greater than the background reading recorded by the instrument.

Identifying a sample as containing activity greater than background, when it actually does not have activity present, is known as a Type I error. Most laboratories set their acceptance of a Type I error at five percent when calculating the MDL for a given analysis. That is, for any value that is greater than or equal to the MDL, there is 95 percent confidence that it represents the detection of true activity.

At very low sample activity levels that are close to the instrument's background reading, it is possible to obtain a sample result that is less than zero. This occurs when the background activity is subtracted from the sample activity to obtain a net value and a negative value results. Due to this situation, a single radiation event observed during a counting period could have a significant effect on the mean (average) value result. Subsequent analysis may produce a sample result that is positive. When the annual data for the SER are compiled, results may be averaged; therefore, all negative values are retained for reporting as well. This data handling practice is consistent with the guidance provided in the Handbook of Radioactivity Measurements Procedures (NCRP 1985) and the Environmental Regulatory Guide for Radiological Effluent Monitoring and Environmental Surveillance (DOE 1991).

Average values are calculated using actual

analytical results, regardless of whether they are above or below the MDL, or even equal to zero. The uncertainty of the mean, or the 95 percent confidence interval, is determined by multiplying the sample standard deviation of the mean by the  $t(0.05)$  statistic.

### RADIONUCLIDES OF ENVIRONMENTAL INTEREST

Several types of radionuclides are found in the environment at BNL due to historical operations.

*Cesium-137* – Cs-137 is a fission-produced radionuclide with a half-life of 30 years (after 30 years, only one half of the original activity level remains). It is found in the worldwide environment as a result of past aboveground nuclear weapons testing and can be observed in near-surface soils at very low concentrations, usually less than 1 pCi/g (0.004 Bq/g). Cs-137 is a beta-emitting radionuclide, but it can be detected by gamma spectroscopy because its decay product, barium-137m, emits gamma radiation.

Cs-137 is found in the environment at BNL mainly as a soil contaminant, from two main sources. The first source is the worldwide deposition from nuclear accidents and fallout from weapons testing programs. The second source is deposition from spills or releases from BNL operations. Nuclear reactor operations produce Cs-137 as a byproduct. In the past, wastewater containing small amounts of Cs-137 generated at the reactor facilities was routinely discharged to the Sewage Treatment Plant (STP), resulting in low-level contamination of the STP and the Peconic River. In 2002 and 2003, under the Environmental Restoration Program, sand and its debris containing low levels of Cs-137, Sr-90, and heavy metals were removed, assuring that future discharges from the STP are free of these contaminants. Soil contaminated with Cs-137 is associated with the following areas that have been, or are being, addressed as part of the Environmental Remediation Program: former Hazardous Waste Management Facility, Waste Concentration Facility, Building 650

Reclamation Facility and Sump Outfall Area, and the Brookhaven Graphite Research Reactor (BGRR).

*Strontium-90* – Sr-90 is a beta-emitting ra dio-

nuclide with a half-life of 28 years. Sr-90 is found in the environment principally as a result of fall-out from aboveground nuclear weapons testing. Sr-90 released by weapons testing in the 1950s and early 1960s is still present in the environment today. Additionally, nations that were not signatories of the Nuclear Test Ban Treaty of 1963 have contributed to the global inventory of fission products (Sr-90 and Cs-137). This radionuclide was also released as a result of the 1986 Chernobyl accident in the former Soviet Union.

Sr-90 is present at BNL in the soil and groundwater. As in the case of Cs-137, some Sr-90 at BNL results from worldwide nuclear testing; the remaining contamination is a by-product of reactor operations. The following areas with Sr-90 contamination have been or are being addressed as part of the Environmental Remediation Program: former Hazardous Waste Management Facility, Waste Concentration Facility, Building 650 Reclamation Facility and Sump Outfall Area, the BGRR, Former and Interim Landfills, Chemical and Glass Holes Area, and the STP.

The information in SER tables is arranged by method of analysis. Because Sr-90 requires a unique method of analysis, it is reported as a separate entry. Methods for detecting Sr-90 using state-of-the-art equipment are quite sensitive (detecting concentrations less than 1 pCi/L), which makes it possible to detect background levels of Sr-90.

*Tritium* – Among the radioactive materials that are used or produced at BNL, tritium has received the most public attention. Approximately four million Ci (1.5E+5 TBq) per year are produced in the atmosphere naturally (NCRP 1979).

As a result of aboveground weapons testing in the 1950s and early 1960s in the United States, the global atmospheric tritium inventory was increased by a factor of approximately 200. Other human activities such as consumer product manufacturing and nuclear power reactor operations have also released tritium into the environment.

Commercially, tritium is used in products such as self-illuminating wristwatches and exit signs (the signs may each contain as much as 25 Ci [925 GBq] of tritium). Tritium also has many uses in medical and biological research as a labeling agent in chemical compounds, and is frequently

## APPENDIX B: UNDERSTANDING RADIATION

used in universities and other research settings such as BNL and other national laboratories.

Of the sources mentioned above, the most significant contributor to tritium in the environment has been aboveground nuclear weapons testing. In the early 1960s, the average tritium concentration in surface streams in the United States reached a value of 4,000 pCi/L (148 Bq/L; NCRP 1979). Approximately the same concentration was measured in precipitation. Today, the level of tritium in surface waters in New York State is less than one-twentieth of that amount, below 200 pCi/L (7.4 Bq/L; NYSDOH 1993). This is less than the detection limit of most analytical laboratories.

Tritium has a half-life of 12.3 years. When an atom of tritium decays, it releases a beta particle, causing transformation of the tritium atom into stable (nonradioactive) helium. The beta radiation that tritium releases has a very low energy, compared to the emissions of most other radioactive elements. In humans, the outer layer of dead skin cells easily stops the beta radiation from tritium; therefore, only when tritium is taken into the body can it cause an exposure. Tritium may be taken into the body by inhalation, ingestion, or absorption of tritiated water through the skin. Because of its low-energy radiation and short residence time in the body, the health threat posed by tritium is very small for most exposures.

Environmental tritium is found in two forms: gaseous elemental tritium and tritiated water or water vapor, in which at least one of the hydrogen atoms in the H<sub>2</sub>O water molecule has been replaced by a tritium atom (hence, its shorthand notation, HTO). Most of the tritium released from BNL sources is in the form of HTO, none as elemental tritium. Sources of tritium at BNL include the reactor facilities (all now non-operational), where residual water (either heavy or light) is converted to

tritium via neutron bombardment; the accelerator facilities, where tritium is produced by secondary radiation interactions with soil and water; and facilities like the Brookhaven Linac Isotope Producer, (BLIP) where tritium is formed from secondary radiation interaction with cooling water. Tritium has been found in the environment at BNL as a groundwater contaminant from operations in the following areas: Current Landfill, BLIP, Alternating Gradient Synchrotron, and the High Flux Beam Reactor. Although small quantities of tritium are still being released to the environment through BNL emissions and effluents, the concentrations and total quantity have been drastically reduced, compared with historical operational releases as discussed in Chapters 4 and 5.

### REFERENCES AND BIBLIOGRAPHY

- DOE Order 458.1. 2011. Radiation Protection of the Public and the Environment. U.S. Department of Energy, Washington, DC. February 11, 2011.
- DOE. 1991. Environmental Regulatory Guide for Radiological Effluent Monitoring and Environmental Surveillance. DOE/EH-0173T. U.S. Department of Energy, Washington, DC.
- NCRP. 1979. Tritium in the Environment. NCRP Report No. 62. National Council on Radiation Protection and Measurements. Bethesda, MD.
- NCRP. 1985. Handbook of Radioactivity Measurements Procedures, NCRP Report No. 58. National Council on Radiation Protection and Measurements, Bethesda, MD.
- NCRP. 1987. Ionizing Radiation Exposure of the Population of the United States. NCRP Report No. 93. National Council on Radiation Protection and Measurements. Bethesda, MD.
- NYSDOH. 1996. Radioactive Contamination in the Peconic River. Bureau of Environmental Radiation Protection, New York State Department of Health, Albany, NY.
- NYSDOH. 1993. Environmental Radiation in New York State. Bureau of Environmental Radiation Protection, New York State Department of Health, Albany, NY.
- Radiochemistry Society Online. [www.radiochemistry.org/nomenclature/index/html](http://www.radiochemistry.org/nomenclature/index/html), accessed 3-25-04.

## *Units of Measure and Half-Life Periods*

### UNITS OF RADIATION MEASUREMENT AND CONVERSIONS

U.S. System	International System	Conversion
curie (Ci)	becquerel (Bq)	1 Ci = $3.7 \times 10^{10}$ Bq
rad	gray (Gy)	1 rad = 0.01 Gy
rem	sievert (Sv)	1 rem = 0.01 Sv

### APPROXIMATE METRIC CONVERSIONS

When you know	multiply by	to obtain	When you know	multiply by	to obtain
centimeters (cm)	0.39	inches (in.)	in.	2.54	cm
meters (m)	3.28	feet (ft)	ft	0.305	m
kilometers (km)	0.62	miles (mi)	mi	1.61	km
kilograms (kg)	2.20	pounds (lb)	lb	0.45	kg
liters (L)	0.264	gallons (gal)	gal	3.785	L
cubic meters (m <sup>3</sup> )	35.32	cubic feet (ft <sup>3</sup> )	ft <sup>3</sup>	0.03	m <sup>3</sup>
hectares (ha)	2.47	acres	acres	0.40	ha
square kilometers (km <sup>2</sup> )	0.39	square miles (mi <sup>2</sup> )	mi <sup>2</sup>	2.59	km <sup>2</sup>
degrees Celcius (°C)	1.8 (°C) + 32	degrees Fahrenheit (°F)	°F	(°F - 32) / 1.8	°C

### SCIENTIFIC NOTATION USED FOR MEASUREMENTS

Multiple	Decimal Equivalent	Notation	Prefix	Symbol
1 x 10 <sup>12</sup>	1,000,000,000,000	E+12	Tera-	T
1 x 10 <sup>9</sup>	1,000,000,000	E+9	giga-	G
1 x 10 <sup>3</sup>	1,000	E+03	kilo-	k
1 x 10 <sup>-2</sup>	0.01	E-02	centi-	c
1 x 10 <sup>-3</sup>	0.001	E-03	milli-	m
1 x 10 <sup>-6</sup>	0.000001	E-06	micro-	μ
1 x 10 <sup>-9</sup>	0.000000001	E-09	nano-	n
1 x 10 <sup>-12</sup>	0.000000000001	E-12	pico-	p

### CONCENTRATION CONVERSIONS

1 ppm = 1,000 ppb
1 ppb = 0.001 ppm = 1μg/L*
1 ppm = 1 mg/L = 1000 μg/L*

\* For aqueous fractions only.



APPENDIX C: Units of Measure and Half-Life Periods

HALF-LIFE PERIODS	
Am-241	432.7 yrs
C-11	~20 min
Co-60	5.3 yrs
Cs-137	30.2 yrs
N-13	~10 min
N-22	2.6 yrs
O-15	~2 min
PU-238	87.7 yrs
Pu-239	24,100.0 yrs
Pu-240	6,560.0 yrs
Sr-90	29.1 yrs
tritium	12.3 yrs
U-234	247,000.0 yrs
U-235	~700 million yrs (7.0004E8)
U-238	~4.5 billion yrs (4.468E9)

## *Federal, State, and Local Laws and Regulations Pertinent to BNL*

---

### **DOE DIRECTIVES, REGULATIONS, AND STANDARDS**

DOE O 231.1B	Order: Admin Change 1: Environment, Safety and Health Reporting	11/28/2012
DOE O 414.1D	Order: Admin Change 1: Quality Assurance	05/08/2013
DOE O 435.1	Order: Change 1: Radioactive Waste Management	08/09/1999
DOE O 436.1	Departmental Sustainability	05/02/2011
DOE P 450.4A	Integrated Safety Management Policy	04/25/2011
DOE P 450.5	Policy: Line Environment, Safety, and Health Oversight	06/26/1997
DOE O 458.1	Order: Change 3: Radiation Protection of the Public and the Environment	02/15/2013
DOE-STD-1153-2019	A Graded Approach for Evaluation of Radiation Doses to Aquatic and Terrestrial Biota	02/12/2019
DOE-STD-1196-2011	Derived Concentration Technical Standard	05/05/2011

---

### **FEDERAL LAWS AND REGULATIONS**

EO 13148	Greening of the Government Through Leadership in Environmental Management
EO 13693	Planning for Federal Sustainability in the Next Decade
10 CFR 1021	National Environmental Protection Act, Implementing and Procedures
10 CFR 1022	Compliance with Floodplain/Wetlands Environmental Review Requirements
10 CFR 830	Subpart A: Quality Assurance Requirements
10 CFR 834	Radiation Protection of the Public and the Environment
16 USC 470	National Historic Preservation Act
36 CFR 60	National Register of Historic Places
36 CFR 63	Determination of Eligibility for Inclusion in the National Register of Historic Places
36 CFR 79	Curation of Federally Owned and Administered Archaeological Collections
36 CFR 800	Protection of Historic Properties
40 CFR 50-0	National Primary and Secondary Ambient Air Quality Standards
40 CFR 61A, H	National Emission Standards for Hazardous Air Pollutants
40 CFR 82	Protection of Stratospheric Ozone
40 CFR 109	Criteria for State, Local and Regional Oil Removal Contingency Plans
40 CFR 110	Discharge of Oil

APPENDIX D: FEDERAL, STATE, AND LOCAL LAWS  
AND REGULATIONS PERTINENT TO BNL

40 CFR 112	Oil Pollution Prevention Act
40 CFR 113	Liability Limits for Small Onshore Storage Facilities
40 CFR 116	Designation of Hazardous Substances
40 CFR 117	Determination of Reportable Quantities for Hazardous Substances
40 CFR 121	State Certification of Activities Requiring a Federal License or Permit
40 CFR 122	National Pollution Discharge Elimination System (NPDES)
40 CFR 123	State Program Requirements
40 CFR 124	Procedures for Decision-making
40 CFR 125	Criteria and Standards for the National Pollutant Discharge Elimination System
40 CFR 129	Toxic Pollutant Effluent Standards
40 CFR 130	Water Quality Planning and Management
40 CFR 131	Water Quality Standards
40 CFR 132	Water Quality Guidance for the Great Lakes System
40 CFR 133	Secondary Treatment Regulation
40 CFR 135	Prior Notice of Citizen Suits
40 CFR 136	Guidelines Establishing Test Procedures for the Analysis of Pollutants
40 CFR 141	National Primary Drinking Water Regulations
40 CFR 142	National Primary Drinking Water Regulations Implementation
40 CFR 143	National Secondary Drinking Water Regulations
40 CFR 144	Underground Injection Control (UIC) Program
40 CFR 146	Underground Injection Control (UIC) Program: Criteria and Standards
40 CFR 148	Hazardous Waste Injection Restrictions
40 CFR 149	Sole Source Aquifers
40 CFR 167	Submissions of Pesticide Reports
40 CFR 168	Statements of Enforcement Policies and Interpretations
40 CFR 169	Books and Records of Pesticide Production and Distribution
40 CFR 170	Worker Protection Standard
40 CFR 171	Certification of Pesticide Applicators
40 CFR 260	Hazardous Waste Management Systems: General
40 CFR 261	Identification and Listing of Hazardous Waste
40 CFR 262	Standards Applicable to Generators of Hazardous Waste
40 CFR 263	Standards Applicable to Transporters of Hazardous Waste

APPENDIX D: FEDERAL, STATE, AND LOCAL LAWS  
AND REGULATIONS PERTINENT TO BNL

40 CFR 264	Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
40 CFR 265	Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
40 CFR 266	Standards for the Management of Special Hazardous Wastes and Specific Types of Hazardous Waste Management Facilities
40 CFR 268	Land Disposal Restrictions
40 CFR 270	EPA Administered Permit Program: The Hazardous Waste Permit Program
40 CFR 271	Requirements for Authorization of State Hazardous Waste Management Programs
40 CFR 272	Approved State Hazardous Waste Management Programs
40 CFR 273	Standards for Universal Waste Management
40 CFR 279	Standards for the Management of Used Oil
40 CFR 280	Technical Standards and Corrective Action Requirements for Owners and Operators of Underground Storage Tanks (USTs)
40 CFR 300	National Oil and Hazardous Substances Pollution Contingency Plan
40 CFR 302	Designation, Reportable Quantities, and Notification
40 CFR 355	Emergency Planning and Notification
40 CFR 370	Hazardous Chemical Report: Community Right-to-Know
40 CFR 372	Toxic Chemical Release Report: Community Right-to-Know
40 CFR 700	Toxic Substances Control Act [TSCA]
40 CFR 702	Toxic Substances Control Act: General Practices and Procedures
40 CFR 704	Toxic Substances Control Act: Reporting and Recordkeeping Requirements
40 CFR 707	Chemical Imports and Exports
40 CFR 710	Inventory Reporting Regulations
40 CFR 712	Chemical Information Rules
40 CFR 716	Health and Safety Data Reporting
40 CFR 717	Records and Reports of Allegations that Chemical Substances Cause Significant Adverse Reactions to Health or the Environment
40 CFR 720	Premanufacture Notification
40 CFR 721	Significant New Users of Chemical Substances
40 CFR 723	Premanufacture Notification Exemptions
40 CFR 725	Reporting Requirements and Review Processes for Microorganisms
40 CFR 745	Lead-Based Paint Poisoning Prevention in Certain Residential Structures
40 CFR 747	Metalworking Fluids
40 CFR 749	Water Treatment Chemicals

APPENDIX D: FEDERAL, STATE, AND LOCAL LAWS  
AND REGULATIONS PERTINENT TO BNL

40 CFR 750	Procedures for Rulemaking Under Section 6 of TSCA
40 CFR 761	PCBs Manufacturing, Processing, Distribution in Commerce, and Use Prohibitions
40 CFR 763	Asbestos
40 CFR 1500	Council on Environmental Quality: Purpose, Policy, and Mandate
40 CFR 1501	NEPA and Agency Planning
40 CFR 1502	Environmental Impact Statement
40 CFR 1503	Commenting
40 CFR 1504	Predecision Referrals to the Council of Proposed Federal Actions
40 CFR 1505	NEPA and Agency Decision-making
40 CFR 1506	Other Requirements of NEPA
40 CFR 1507	Agency Compliance
40 CFR 1508	Terminology and Index
50 CFR 17	Endangered and Threatened Wildlife and Plants
50 CFR 21	Migratory Bird Treaty Act
50 CFR 22	Bald and Golden Eagle Protection Act

---

**NEW YORK STATE LAWS, REGULATIONS, AND STANDARDS**

6 NYCRR 182	Endangered and Threatened Species of Fish and Wildlife, Species of Special Concern
6 NYCRR 200	General Provisions
6 NYCRR 201	Subpart 201-1: General Provisions
6 NYCRR 202	Part 202: Emissions Verification
6 NYCRR 205	Architectural and Industrial Maintenance (AIM) Coatings
6 NYCRR 207	Control Measures for an Air Pollution Episode
6 NYCRR 208	Landfill Gas Collection and Control System for Certain Municipal Solid Waste Landfills
6 NYCRR 211	General Prohibitions
6 NYCRR 212	Process Operations
6 NYCRR 215	Open Fires
6 NYCRR 217	Environmental Conservation Rules and Regulations [Exhaust and Emission Standards]
6 NYCRR 218	Subpart 218-1 [More on Vehicle Exhaust]
6 NYCRR 221	Asbestos-Containing Surface Coating Material
6 NYCRR 225	Subpart 225-1: Fuel Composition and Use – Sulfur Limitations
6 NYCRR 226	Solvent Metal Cleaning Processes
6 NYCRR 227	Subpart 227-2: Reasonable Available Control Technology (RACT) for Major Facilities of



Oxides of Nitrogen (NO<sub>x</sub>)

6 NYCRR 228	Subpart 228-1: Surface Coating Processes
6 NYCRR 229	Petroleum and Volatile Organic Liquid Storage and Transfer
6 NYCRR 230	Gasoline Dispensing Sites and Transport Vehicles
6 NYCRR 231	New Source Review for New and Modified Facilities
6 NYCRR 234	Graphic Arts
6 NYCRR 239	Portable Fuel Container Spillage Control
6 NYCRR 240	Conformity to State or Federal Implementation Plans
6 NYCRR 250	Miscellaneous Orders
6 NYCRR 256	Air Quality Classification System
6 NYCRR 257	Air Quality Standards
6 NYCRR 307	[Air Quality in] Suffolk County
6 NYCRR 320	Pesticides - General
6 NYCRR 325	Application of Pesticides
6 NYCRR 326	Registration and Classification of Pesticides
6 NYCRR 327	Use of Chemicals for the Control or Elimination of Aquatic Vegetation
6 NYCRR 328	Use of Chemicals for the Extermination of Undesirable Fish
6 NYCRR 329	Use of Chemicals for the Control or Elimination of Aquatic Insects
6 NYCRR 360	Solid Waste Management Facilities General Requirements
6 NYCRR 361	Siting of Industrial Hazardous Waste Facilities
6 NYCRR 364	Waste Transporter Permits
6 NYCRR 370	Hazardous Waste Management Regulations
6 NYCRR 371	Identification and Listing of Hazardous Waste
6 NYCRR 372	Hazardous Waste Manifest System and Related Standards for Generators, Transporters and Facilities
6 NYCRR 373	Hazardous Waste Management Facilities
6 NYCRR 374	Standards for the Management of Specific Hazardous Wastes
6 NYCRR 376	Land Disposal Restrictions
6 NYCRR 595	Release of Hazardous Substances
6 NYCRR 596	Hazardous Substance Bulk Storage Regulations
6 NYCRR 597	List of Hazardous Substances
6 NYCRR 611	Environmental Priorities and Procedures in Petroleum Cleanup and Removal
6 NYCRR 612	Registration of Petroleum Storage Facilities

APPENDIX D: FEDERAL, STATE, AND LOCAL LAWS  
AND REGULATIONS PERTINENT TO BNL

6 NYCRR 613	Handling and Storage of Petroleum
6 NYCRR 663	Freshwater Wetlands Permit Requirements
6 NYCRR 666	Regulation for Administration and Management of the Wild, Scenic, and Recreational Rivers System in New York State Excepting Private Land in the Adirondack Park
6 NYCRR 700	Part 700 Water Quality Regulations
6 NYCRR 701	Classification – Surface Waters and Groundwaters
6 NYCRR 702	Derivation and Use of Standards and Guidance Values
6 NYCRR 703	Surface Water and Groundwater Quality Standards and Groundwater Effluent Limitations
6 NYCRR 750	Obtaining a SPDES Permit
10 NYCRR 5	State Sanitary Code – Part 5

---

**SUFFOLK COUNTY RULES, REGULATIONS, AND STANDARDS**

SCSC Art. 12	Toxic and Hazardous Material Storage, Handling and Control
--------------	--

APPENDIX E: BNL SITE SUSTAINABILITY PLAN:  
STATUS SUMMARY FOR FISCAL YEAR 2021

Prior Department of Energy Goal	Current Performance Status	Planned Actions & Contributions
<b>Energy Management</b>		
Reduce energy use intensity (Btu per gross square foot) in goal-subject buildings.	FY21 energy intensity was nearly identical to the base year of 2015: 243,174 Btu/GSF vs. 243,031, respectively.	A second Utility Energy Services Contract-II (or self-funded) effort focused on Building HVAC controls, temperature set-back, re-heat minimization, and lighting.  Increased emphasis on temperature set-back policy.
EISA Section 432 continuous (four-year cycle) energy and water evaluations.	269,325 sq. ft. were audited in FY21.	Continue audits meeting the four-year cycle.
Meter individual buildings for electricity, natural gas, steam, and water, where cost-effective and appropriate.	Twelve new smart meters were added in FY21. Ninety-nine percent of electricity, 100 percent of natural gas, and 90-plus percent of steam are metered. Most potable water is used for cooling tower make-up. Metering was about 30 percent of cooling tower make-up and adding meters regularly.	Continue maintaining and expanding metering installations, with an emphasis on potable water make-up for cooling towers.
<b>Water Management</b>		
Reduce potable water use intensity (gallons per gross square foot).	Potable-water usage fell from 931 million gallons/year in FY99 to about 304 million gallons/year in FY21, a reduction of 67.4 percent. BNL's annual water use intensity has decreased from 101 gallons per square foot to 63.2 gallons per square foot, a 37.5 percent water usage reduction since base-year.	<ul style="list-style-type: none"> <li>• Commissioning of Well No. 12 in early FY22</li> <li>• BNL will continue to implement BNL's Water Management Plan and reduce water usage by implementing best-management practices.</li> <li>• BNL will continue to utilize water-efficient processes and plumbing fixtures to conserve water in new construction buildings and renovations.</li> </ul>
Reduce non-potable freshwater consumption (Gal) for industrial, landscaping, and agricultural.	BNL does not have any industrial landscaping.	N/A
<b>Waste Management</b>		
Reduce non-hazardous solid waste sent to treatment and disposal facilities.	BNL continues its successful waste diversion program, exceeding the DOE goal by continuing to divert more than 50 percent of material from the municipal solid waste stream for recycling or reuse during FY21. BNL continued its Pollution Prevention Opportunity Program for FY21 to identify and promote new ideas for waste reduction, recycling, and reuse.	<ul style="list-style-type: none"> <li>• BNL will open discussions with the site's current waste hauler regarding options for transfer of municipal solid waste (MSW) from landfills to a Waste-to-Energy facility in order to evaluate the feasibility of the change. Diversion of this waste stream would make BNL a net-zero site.</li> <li>• EPD will refocus the Pollution Prevention Program towards ideas that divert MSW and/or otherwise directly contribute to any of the SSP goals and will capture the contributions from these projects in future Site Sustainability Plan reporting.</li> <li>• BNL's internal procedure (SBMS subject area Pollution Prevention) and the associated website will be revised in FY22 to better reflect the current direction of the applicable executive orders.</li> </ul>

APPENDIX E: BNL SITE SUSTAINABILITY PLAN:  
STATUS SUMMARY FOR FISCAL YEAR 2021

Prior Department of Energy Goal	Current Performance Status	Planned Actions & Contributions
<b>Waste Management (Continued)</b>		
Reduce construction and demolition (C&D) materials and debris sent to treatment and disposal facilities.	<ul style="list-style-type: none"> <li>Demolition of Building 650 (Former Hot Laundry) and Building 421 (Structural Biology Office) included contracts for offsite crushing and reuse of concrete, as well as collection of uncontaminated metal for recycling. Most of the Building 650 waste was handled as low-level radioactive waste. The project also generated unrecyclable waste that was landfilled.</li> <li>BNL has better defined its C&amp;D baseline and can now identify areas for improvement.</li> </ul>	<ul style="list-style-type: none"> <li>Reduction efforts will be challenging as site expansion will increase overall generation rates. BNL will look for opportunities to increase the percentage of C&amp;D recycled but may not be able to reduce the total amount generated.</li> <li>BNL will assess how effectively Facilities &amp; Operations C&amp;D debris dumpsters are managed to determine if efforts to improve segregation of recyclables is justified. Numerical improvement goals will be developed if deemed worthwhile.</li> </ul>
<b>Fleet Management</b>		
Reduce petroleum consumption.	Flex Fuel vehicles will only be assigned E-85.	Order more alternative fuel vehicle (AFVs) as they become available.
Increase alternative fuel consumption.	Flex Fuel vehicles will only be assigned E-85.	Order more AFVs as they become available.
Acquire alternative fuel and electric vehicles.	Order more AFVs when they are available for the type of vehicle needed.	Order more AFVs as they are available for the type of vehicle needed.
<b>Clean &amp; Renewable Energy</b>		
Increase consumption of clean and renewable electric energy.	<ul style="list-style-type: none"> <li>Purchased 24,000,000 kWh of renewable energy certificates (REC) for FY21.</li> <li>Northeast Solar Energy Research Center (NSERC) Solar PV array produced 605,125 kWh.</li> </ul>	<ul style="list-style-type: none"> <li>Increase purchase of REC's.</li> <li>Maintain and improve NSERC output.</li> <li>Look for additional opportunities locally and on-site.</li> </ul>
Increase consumption of clean and renewable non-electric thermal energy.	Biofuel use in off-road utility vehicles	Increase biofuel use, potentially in satellite hot water or steam heating systems on site.
<b>Sustainable Buildings</b>		
Increase the number of owned buildings that are compliant with the Guiding Principles (GP) for Sustainable Buildings.	Currently eight buildings have achieved 100 percent of the 2008 GP's and an additional nine buildings are considered meeting them as they have achieved LEED Gold or higher status. This represents 15.3 percent of non-excluded buildings.	As BNL constructs new buildings and demolishes old non-compliant buildings, this percentage will increase.
<b>Acquisitions and Procurement</b>		
Promote sustainable acquisition and procurement to the maximum extent practicable, ensuring all sustainability clauses are included as appropriate.	BNL fully assessed its sustainability program during 2021 with a focus on identifying weakness and areas for improvement. The resulting corrective actions set the stage for program improvements during 2022. The types of improvements identified mainly include the development of better tools for requisitioners.	During 2022, BNL will continue to develop the Commonly Ordered Items page, provide E- Buy training specific to Environmentally Preferable Purchasing (EPP) requirements, and provide support to requisitioners with questions. BNL will also review and rewrite the Pollution Prevention (P2) Subject Area and Environmental Protection Division (EPD) P2 webpage, incorporating the improvements identified during the 2021 Sustainability Assessment. Specific actions are tracked with BNL's Integrated Operational Performance System and are designed to provide requisitioners improved tools for EPP conformance.

APPENDIX E: BNL SITE SUSTAINABILITY PLAN:  
STATUS SUMMARY FOR FISCAL YEAR 2021

Prior Department of Energy Goal	Current Performance Status	Planned Actions & Contributions
<b>Efficiency &amp; Conservation Measure Investments</b>		
Implement life-cycle cost effective efficiency and conservation measures with appropriated funds and/or performance contracts.	Internally funded energy conservation and sustainability related initiatives include a continuation of best practices, with continued emphasis on temperature setback during unoccupied periods.	Re-evaluate the UESC II project and other potential initiatives using updated energy cost escalation factors. BNL will also revisit the UESC II scope to aggressively address energy and greenhouse gas (GHG) savings.
<b>Electronic Stewardship</b>		
Electronics stewardship from acquisition, operations, to end of life	The Lab will continue to require that all printers, laptops, and desktop computers ordered through the E-Pro system have an Electronic Product Environmental Assessment Tool (EPEAT) "Gold" certification as well as internal reuse efforts.	<ul style="list-style-type: none"> <li>• Maintain the current, successful program and reestablish Home Electronics Collection Days when COVID staffing restrictions are lifted and personnel can return to the BNL site.</li> <li>• Investigate cause of EPEAT conformance decrease during 2021 and correct for 2022.</li> <li>• BNL has plans to increase communication around the Environmental Management System (EMS) in general during 2022. Those communications will focus on general sustainability topics, including messages to staff about purchasing EPEAT conforming electronics.</li> </ul>
Increase energy and water efficiency in high-performance computing and data centers.	Additional metering was installed in some of the existing data centers. The new data center in Building 725 was essentially complete in 2021. The design is expected to result in PUE of less than 1.3.	<p>Meeting the power usage effectiveness (PUE) of 1.5 for the existing data centers will likely require a significant investment. Four of the eight existing data centers require the installation of new metering, which is in progress. BNL will work to determine the best approach, including consolidation of data centers.</p> <p>Evaluate the new data center performance.</p>
<b>Organizational Resilience</b>		
Implement climate adaptation and resilience measures. Ensure BNL's Mission Essential Function # 13 is included in the COOP Plan.	Continue to implement resiliency measures as part of DOE Order 150.1A.	<p>Current planning efforts include:</p> <ul style="list-style-type: none"> <li>• Development of a Continuity of Operations (COOP) Plan template for the six BNL Mission Essential Functions to utilize and develop their programmatic COOP Plans. Develop and implement Senior Leadership Delegation of Authority training.</li> <li>• Create COOP event matrix for declaring a COOP event.</li> <li>• Develop COOP Coordinators notification list.</li> <li>• Develop, implement, and update current COOP Plan to comply with the new DOE Continuity of Operations Order 150.1B.</li> </ul>



APPENDIX E: BNL SITE SUSTAINABILITY PLAN:  
STATUS SUMMARY FOR FISCAL YEAR 2021

Prior Department of Energy Goal	Current Performance Status	Planned Actions & Contributions
<b>Multiple Categories</b>		
<p>Reduce Scope 1 &amp; 2 greenhouse gas emissions.</p>	<p>According to the Department of Energy Sustainability Dashboard, BNL's Scope 1 &amp; 2 emissions for FY21 were 167,520 MtCO<sub>2e</sub>, less than 18.5 percent relative to the 2008 baseline.</p> <p>BNL's electricity purchases included 45 percent clean hydropower for FY21, as well as 22 million kWh of REC's.</p>	<p>Continued efforts for Energy Intensity Reductions through UESC's, Energy Savings Performance Contracts (ESPC's), and other methods including self-funding. Continued hydropower allocation, REC purchases for the operation of the NSERC Solar photovoltaic (PV) array.</p> <p>Meeting the goal may be difficult in the near-term (2028– 2030+) due to increased electrical load associated with Electron Ion Collider and the new data center.</p> <p>However, New York State's aggressive energy goals as part of the Climate Leadership and Community Protection Act (CLCPA) will result in dramatic reductions of BNL's Scope 2 emissions, and to a lesser extent Scope 1.</p>
<p>Reduce Scope 3 greenhouse gas emissions.</p>	<p>COVID-19 restrictions that limited domestic and foreign air travel trips to those which were mission critical, and the fact that 67 percent of employees teleworked over the course of the year, are the primary reasons for the 26.1 percent drop in the Laboratory's Scope 3 GHG emissions.</p>	<p>The Laboratory's "New Telework and Remote Work Policy," announced on October 25, will affect reductions in commuting GHGs in FY22 and beyond. Since Laboratory use of Microsoft Teams and Zoom virtual communication tools during the pandemic has shown they can serve as effective alternatives to travelling to meetings, seminars, and conferences, EPD plans to work with the subject matter expert for the Domestic Travel and Foreign Travel subject areas on possible revisions to the guidelines that Department Chairs and Division Managers use to determine if travel requests are appropriate and feasible.</p>

Site Environmental Report  
**Reader Response Form**

The Site Environmental Report (SER) is written to inform regulators, the public, and Brookhaven National Lab (BNL) employees of the Laboratory's environmental performance for the calendar year in review. The report summarizes the Laboratory's on-site environmental data; environmental management performance; compliance with applicable regulations; and environmental, restoration, and surveillance monitoring programs.

BNL welcomes your comments, suggestions for improvements, or any questions you may have. Please fill in the information below, and mail your response form to:

Brookhaven National Laboratory  
Environmental Protection Division  
Attention: SER Project Coordinator  
Building 860  
P.O. Box 5000  
Upton, NY 11973-5000

Name

---

Address

---

Phone

---

Email

---

Comments, Suggestions, or Questions

---

---

---

---

---

SER Project Coordinator  
Environmental Protection Division  
Building 860  
Brookhaven National Laboratory  
PO Box 5000  
Upton, NY 11973-5000